


POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK8773

DATE	REV	REVISION RECORD	APP	DR	CK
7-25-07	NC	ECO 28205	RCW	YK	TK

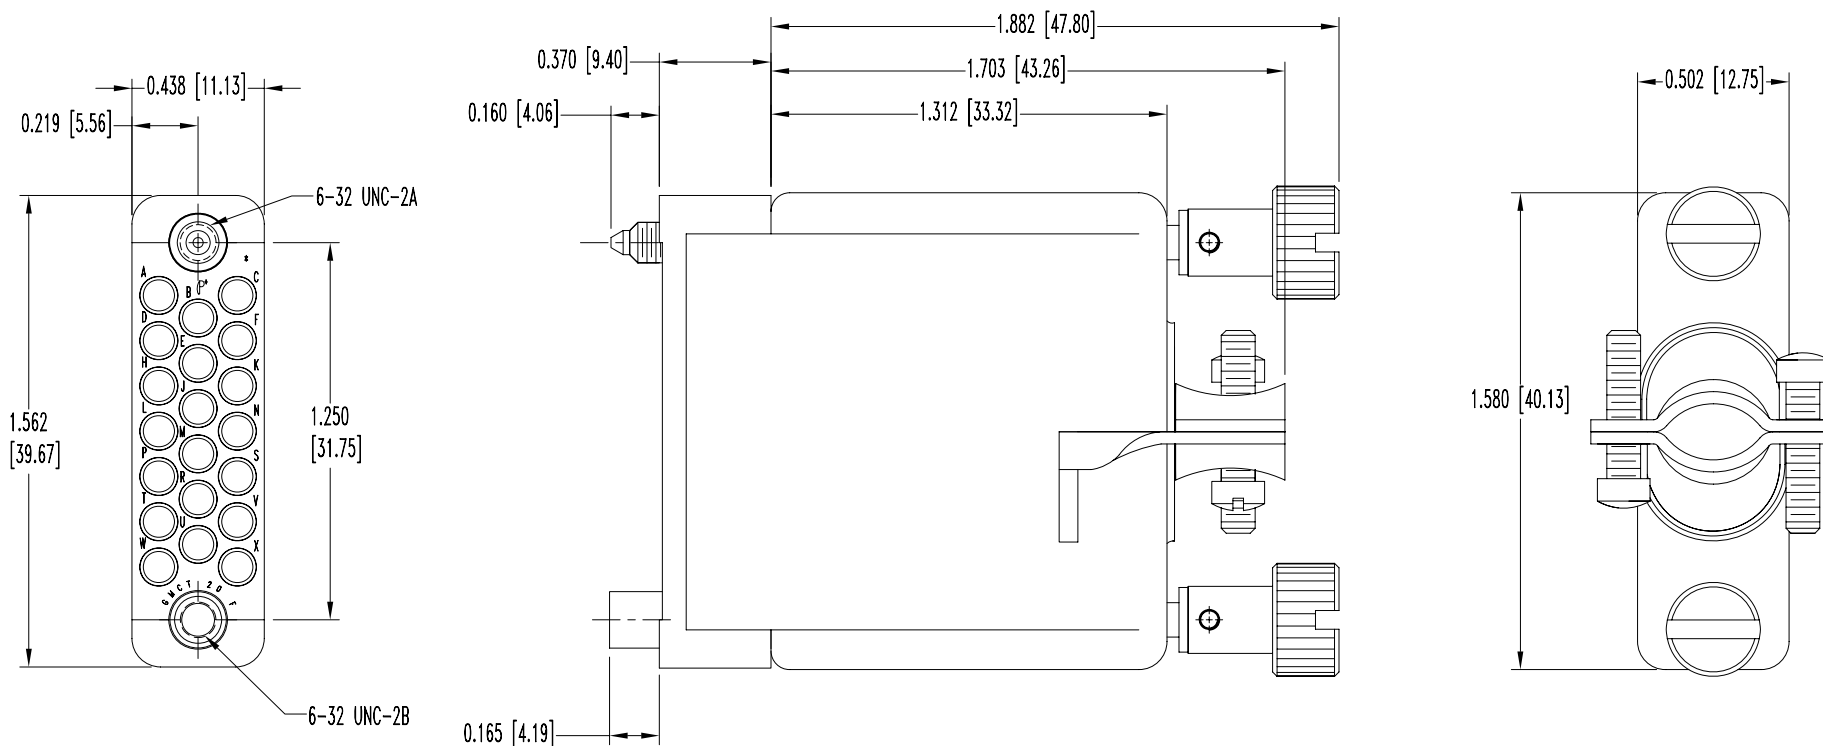

# NOTES:

## 1. MATERIALS AND FINISHES:

INSULATOR: GLASS FILLED DAP PER ASTM-D-5948 TYPE SDG-F. GREY COLOR.

HOOD, CABLE CLAMPS AND KNOBS: ALUMINUM, YELLOW ANODIZE.

JACKSCREWS: STAINLESS STEEL, PASSIVATED.

WASHERS: STAINLESS STEEL, PASSIVATED.

ROLL PINS: STAINLESS STEEL, PASSIVATED.



SCREWS: BRASS, ZINC PLATE WITH CHROMATE SEAL.

## 2. ELECTRICAL CHARACTERISTICS:

INSULATOR RESISTANCE: 5 G OHMS MINIMUM.

WORKING TEMPERATURE: -65°C TO +150°C.

## 3. DIMENSIONS ARE IN INCHES [MILLIMETERS].

 <b>POSITRONIC INDUSTRIES INC.</b> <a href="http://www.connectpositronic.com">www.connectpositronic.com</a>		FSCM 28198	
 DECIMAL TOL. $\pm 0.015$ [0.38]	GMCT SERIES TITLE <b>GMCT20F0E100J0</b>	SCALE N.T.S.	DRAWN BY <b>YK</b> APPROVED BY <b>RCW</b>
ANGULAR TOL. $\pm 5^\circ$	DATE <b>7-25-07</b>	DRAWING NUMBER <b>SK8773</b>	REV. <b>NC</b>