
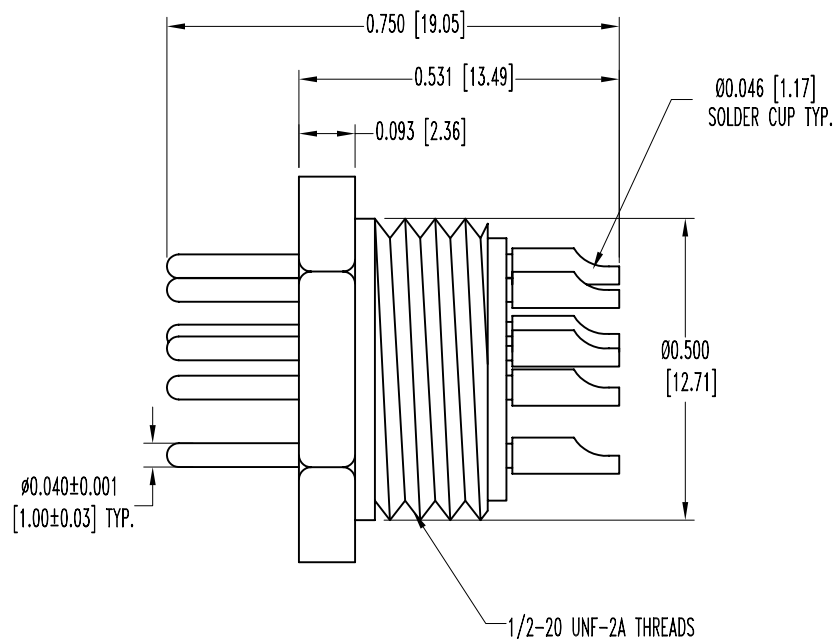


POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK8108

DATE	REV	REVISION RECORD	APP	DR	CK
11-9-06	NC	ECO 27004		ME	

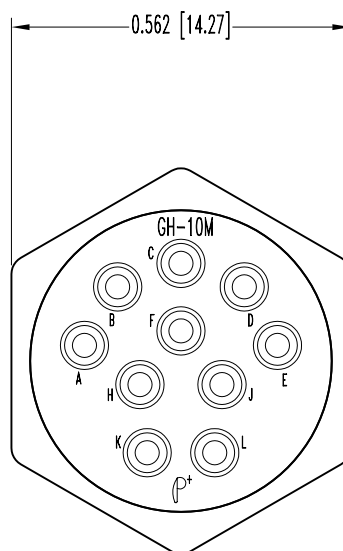

NOTES:

1. MATERIALS AND FINISHES:

INSULATOR: GLASS-FILLED DAP PER ASTM-D-5948, TYPE SDG-F. GREY COLOR.

CONTACTS: COPPER ALLOY, GOLD FLASH OVER NICKEL FINISH.

2. ELECTRICAL CHARACTERISTICS:

CONTACT CURRENT RATING: 7.5 AMPERES, MAXIMUM.

INITIAL CONTACT RESISTANCE: 0.010 OHMS, MAXIMUM.

INSULATION RESISTANCE: 5 G OHMS.

WORKING VOLTAGE: 300 VAC (rms).

3. TEMPERATURE RANGE: -55°C TO +125° C.

4. CONNECTORS ARE ROHS COMPLIANT PER ROHS DIRECTIVE 2002/95/EC OF 27 JAN 2003.

5. DIMENSIONS ARE IN INCHES [MILLIMETERS].

 POSITRONIC INDUSTRIES INC. www.connectpositronic.com		SCALE N.T.S.		DRAWN BY M. ENEA	
DECIMAL TOL. ± 0.015 [0.38]		GH SERIES		APPROVED BY	
TITLE GH10MSC00/AA		DATE 11-9-06		DRAWING NUMBER SK8108	
ANGULAR TOL. ± 5°		REV. NC			