
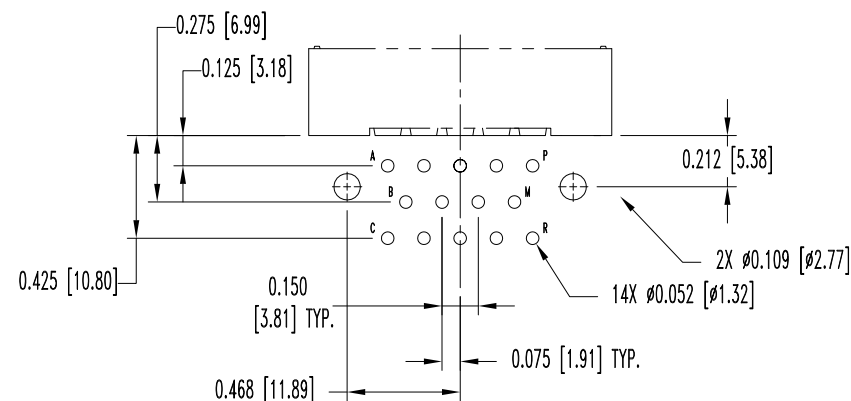
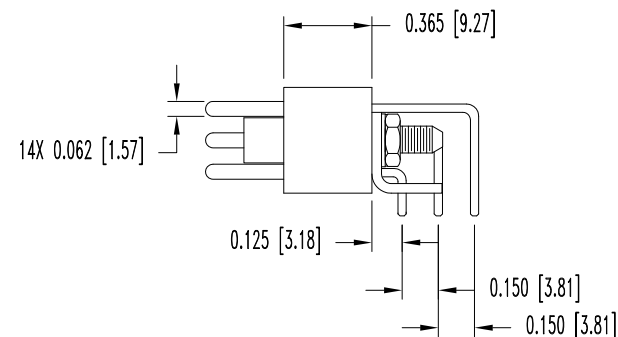
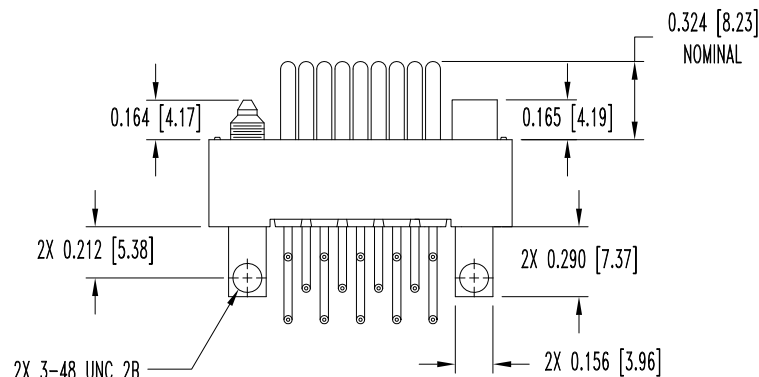


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK1691

| DATE | REV | REVISION RECORD | APP | DR | CK |
|---------|-----|-----------------|-----|----|----|
| 2-28-08 | A | ECO 29050 | RCW | YK | TK |
| 8-26-08 | B | ECO 29909 | RCW | YK | TK |
| | | | | | |
| | | | | | |

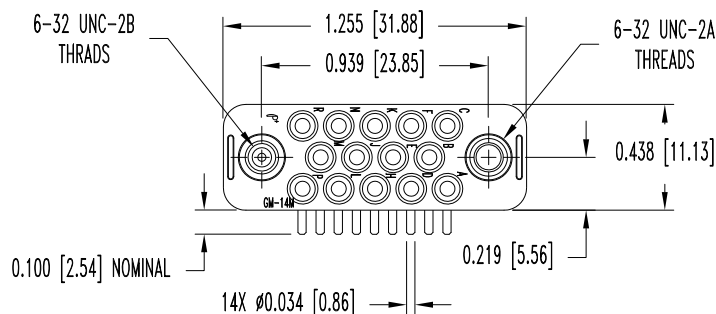

CONTACT HOLE PATTERN

NOTES:

1. MATERIALS AND FINISHES:

INSULATOR: GLASS FILLED DAP PER ASTM-D-5948 TYPE SDG-F, COLOR GREY.

CONTACTS: COPPER ALLOY WITH GOLD FLASH OVER NICKEL FINISH.

ANGLE BRACKETS: BRASS, ZINC PLATE WITH CHROMATE SEAL.

JACKSCREWS: BRASS, ZINC PLATE WITH CHROMATE SEAL.

LOCKWASHERS: BRONZE, ZINC PLATE WITH CHROMATE SEAL.

HEX NUTS: BRASS, ZINC PLATE WITH CHROMATE SEAL.

2. ELECTRICAL CHARACTERISTICS:

CONTACT CURRENT RATING [MAXIMUM]: 7.5 AMPERES LIMITED AT CONTACT TERMINATION DIAMETER.

INITIAL CONTACT RESISTANCE: 0.003 OHMS.

INSULATOR RESISTANCE: 5 G OHMS.

WORKING VOLTAGE: 250 V.AC [rms].

3. WORKING TEMPERATURE: -55°C TO +125°C.

4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

| | | | |
|--|--------------------------------------|--------------------------|---|
|  POSITRONIC INDUSTRIES INC. www.connectpositronic.com | | FSCM 28198 | |
| | | | |
|  DECIMAL TOL. ± 0.015 [0.38] | GABL SERIES TITLE GABL14MOTOLB | SCALE N.T.S. | DRAWN BY YK APPROVED BY R WILLIAMS |
| ANGULAR TOL. ± 5° | DATE 2-29-08 | DRAWING NUMBER SK1691 | REV. B |