
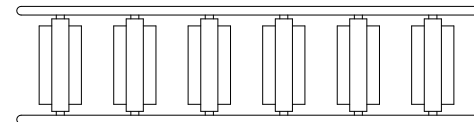

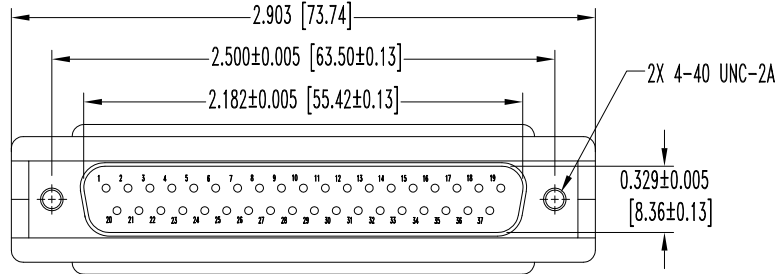
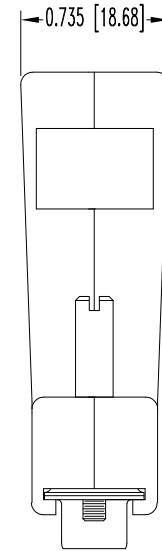


SK10544

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
4-17-09	NC	ECO 30950	RCW	BS	COLE

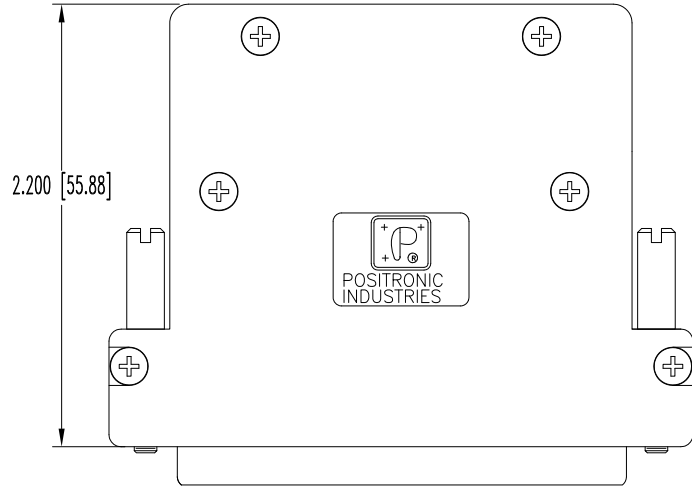

NOTES:

1. MATERIALS AND FINISHES:

INSULATOR: GLASS FILLED DAP PER ASTM-D-5948, SDG-F, UL 94V-0, COLOR GREEN.

SHELLS: STEEL, ZINC PLATE WTH CHROMATE SEAL.

HOOD AND INSTERT: COMPOSITE, CONDUCTIVE VOLUME RESISTIVITY.

(1.0 OHM-cm MAX.), UL 94V-0.

ATTENUATION: 40+ DECIBELS.

JACKSCREWS: STEEL WITH ZINC PLATE WITH BLUE CHROMATE SEAL.

CABLE CLAMPS: STEEL, NICKEL PLATE.

SCREWS: BRASS, ZINC PLATE WITH CHROMATE SEAL.

2. ELECTRICAL CHARACTERISTICS:

WORKING VOLTAGE: 300 V r.m.s.

3. TEMPERATURE RANGE: -55°C TO +125°C

4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

	POSITRONIC INDUSTRIES INC. www.connectpositronic.com		FSCM 28198
	RD SERIES	SCALE N.T.S.	DRAWN BY B SHELEDY
DECIMAL TOL. ± 0.015 [0.38]	TITLE RD37M00Z00		
ANGULAR TOL. ± 5°	DATE 4-17-09	DRAWING NUMBER SK10544	REV. NC
		APPROVED BY R WILLIAMS	