
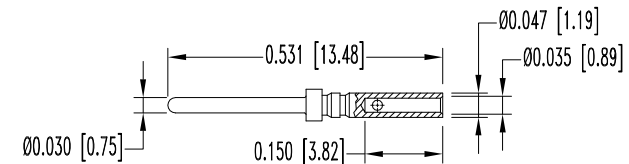
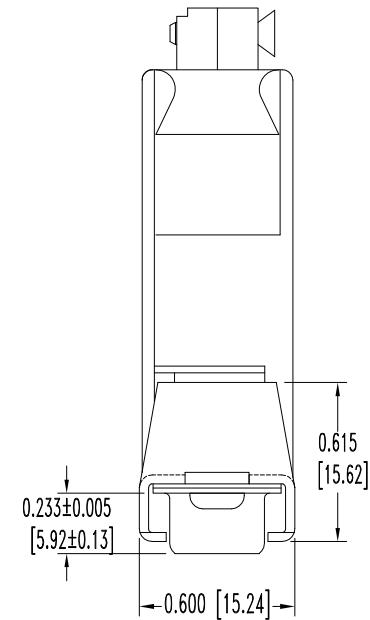
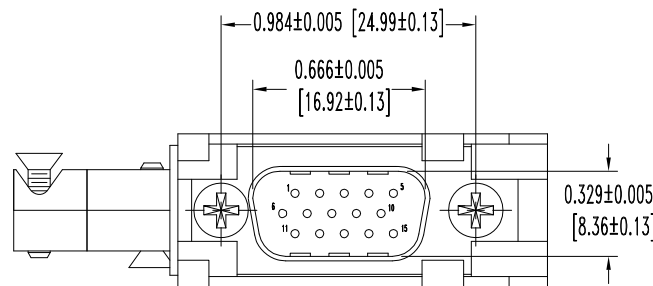


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK8649

DATE	REV	REVISION RECORD	APP	DR	CK
6-18 07	NC	ECO 28041	RCW	YK	TK
5-3 10	A	ECO 32433	TK	ME	TK

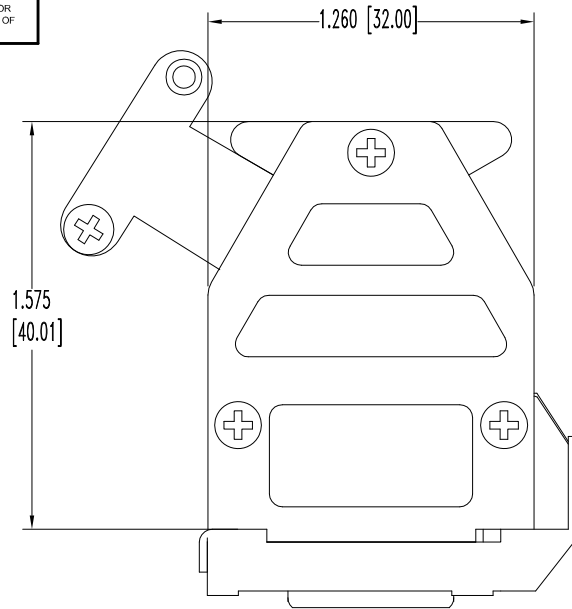

NOTES:

1. MATERIALS AND FINISHES:

INSULATOR: GLASS FILLED POLYESTER PER ASTM D5927, UL 94V-0, COLOR BLACK.

CONTACTS: PRECISION MACHINED BRASS, GOLD FLASH OVER NICKEL PLATE.

SHELLS: STEEL TIN PLATED AND DIMPLED.

HOOD: ZINC, DIE CAST.

CABLE CLAMPS: ZINC, DIE CAST.

LOCK LEVER: STEEL, NICKEL PLATE.

CABLE CLAMP AND COVER SCREWS: STEEL, NICKEL PLATE.


MOUNTING SCREWS: STEEL, ZINC PLATE WITH CHROMATE SEAL.

2. DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST HIGH DENSITY D-SUB PRODUCT PUBLICATION. VISIT CONNECTPOSITRONIC.COM/PRODUCTS/59/HIGHDENSITYD-SUBMINIATURE OR CONNECTPOSITRONIC.COM.

3. DIMENSIONS ARE IN INCHES [MILLIMETERS].

MALE CONTACT

15X (ENLARGED)

 POSITRONIC INDUSTRIES INC. www.connectpositronic.com		FSCM 28198	
 DECIMAL TOL. ± 0.015 [0.38]	ODD SERIES TITLE ODD15M10GVLZ	SCALE N.T.S.	DRAWN BY YK APPROVED BY RCW
ANGULAR TOL. $\pm 5^\circ$	DATE 6-18-07	DRAWING NUMBER SK8649	REV. A