




SK12162



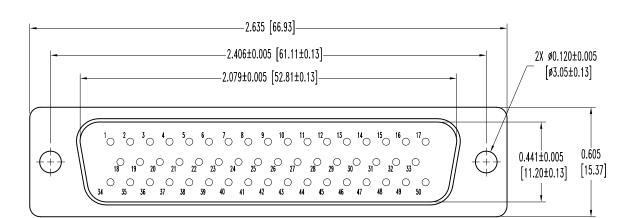



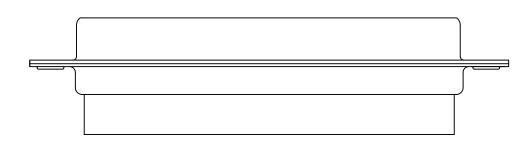



50X MALE CONTACT ENLARGED

NOTES:

1. MATERIALS AND FINISHES:

HIS DRAWING CONTAINS INFORMATION PROPRIETARY TO OSITRONIC AND IT'S SUBSIDIARIES. POSITRONIC BELIEVES

PUSITIONIC AND IT'S SUBSIDIANES. POSITIONIC SELECTES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED ON DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

INSULATOR: GLASS FILLED DAP PER ASTM-D-5948, SDG-F, UL 94V-O, GREEN COLOR. CONTACTS: PRECISION MACHINED COPPER ALLOY, GOLD FLASH OVER NICKEL PLATE. SHELLS: STEEL, ZINC PLATE WITH CHROMATE SEAL.

- DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST STANDARD DENSITY D-SUB PRODUCT PUBLICATION. VISIT CONNECTPOSITRONIC.COM/PRODUCTS/45/STANDARDDENSITYD-SUBMINIATURE OR CONNECTPOSITRONIC.COM.
- 3. DIMENSIONS ARE IN INCHES [MILLIMETERS].

