
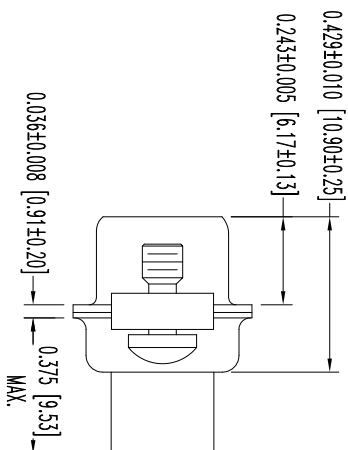
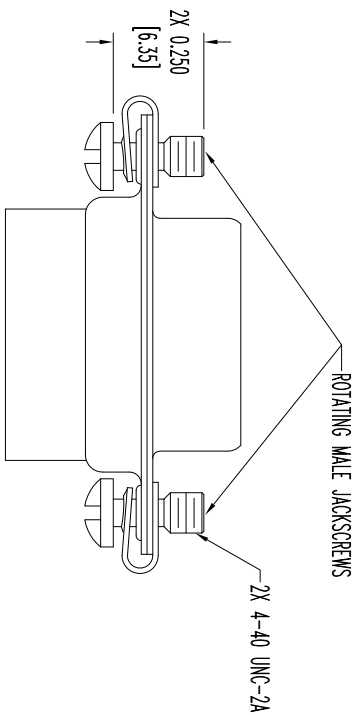



THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE USER HAS TAKEN THE NECESSARY PRECAUTIONS TO VERIFY THE USER'S OWN DIMENSIONS AND RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

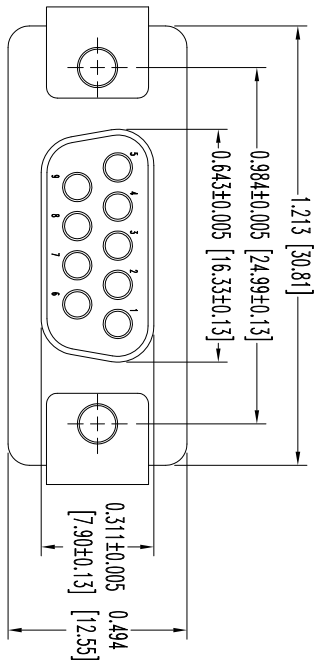

- NOTES:
1. MATERIALS AND FINISHES:
INSULATORS: GLASS FILLED DAP PER ASTM-D5948, SDG-F, UL 94V-0, COLOR: GREEN.
SHELLS: STEEL, ZINC PLATE WITH CHROMATE SEAL.
U-CLIPS: SPRING STEEL, ZINC PLATE WITH CHROMATE SEAL.
CAPTIVE SCREWS: STEEL, ZINC PLATE WITH CHROMATE SEAL.
 2. DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST STANDARD DENSITY D-SUB PRODUCT PUBLICATION. VISIT CONNECTPOSITRONIC.COM/PRODUCTS/45/STANDARDENSITYD-SUBMINIATURE OR CONNECTPOSITRONIC.COM.
 3. CONNECTORS ARE COMPLIANT TO THE CURRENT ROHS DIRECTIVE.
 4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

DATE	REV	REVISION RECORD	APP	DR	CK
6-08-11	NC	ECO 34120	COLF	BS	COLF
6-5-13	A	ECO 39693	COLF	BE	COLF

SK12412

 POSITRONIC INDUSTRIES INC. www.connectpositronic.com		SCALE		DRAWN BY	
		N.T.S.		BS	
DECIMAL TOL. ± 0.015 [0.38]		RD SPRERS		APPROVED BY	
TITLE		RD9S000E20/AA		COLF	
DATE		6-08-11		DRAWING NUMBER	
ANGULAR TOL. ± 5°		SK12412		REV.	
				A	

FSCM 28198