
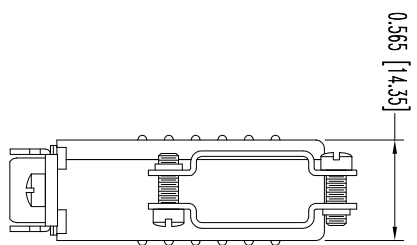
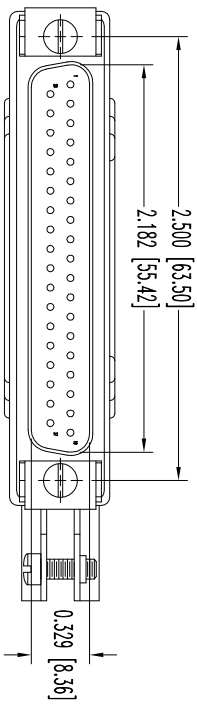



THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE USER MAKES SUCH USES AS GIVEN AND SINCE THE USER ASSUMES ALL RESPONSIBILITY FOR THE DESIGN AND RISK, POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

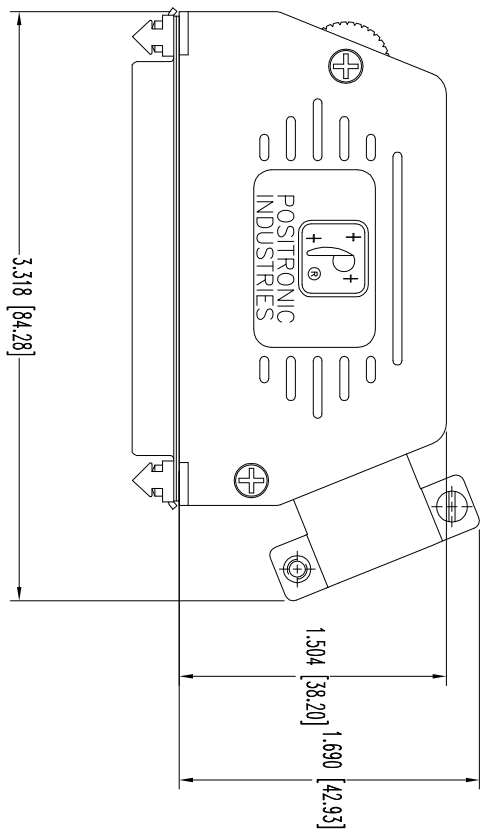

- NOTES:
1. MATERIAL AND FINISHES:  
INSULATOR: GLASS FILLED DAP PER ASTM-D-5948, SOG-F, UL 94V-0, COLOR: GREEN.  
SHELLS: STEEL, ZINC PLATE WITH CHROMATE SEAL.  
HOOD: GLASS FILLED NYLON, UL 94V-0.  
LOCK TAB: STEEL WITH NICKEL PLATE.  
CABLE CLAMPS: STEEL WITH NICKEL PLATE.  
SCREWS: BRASS, ZINC PLATE WITH CHROMATE SEAL.
  2. MECHANICAL CHARACTERISTICS:  
INSULATOR RESISTANCE: 5 G OHMS.  
WORKING VOLTAGE: 300 V r.m.s.
  3. TEMPERATURE RANGE: -55°C TO +125°C
  4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

DATE	REV	REVISION RECORD	APP	DR	CK
6-04-09	NC	ECO 31139	RCW	BS	RCW

SK10821

 <p><b>POSITRONIC INDUSTRIES INC.</b> www.connectpositronic.com</p>		FSCM 28198	
		RD SERIES	SCALE N.T.S.
<p>DECIMAL TOL. ± 0.015 [0.38]</p>		<p>DRAWN BY B SHELLBOY</p>	
<p>ANGULAR TOL. ± 5°</p>		<p>APPROVED BY R WILLIAMS</p>	
<p>TITLE RD37M00LV30</p>		<p>DATE 6-04-09</p>	
<p>DRAWING NUMBER SK10821</p>		<p>REV. NC</p>	