
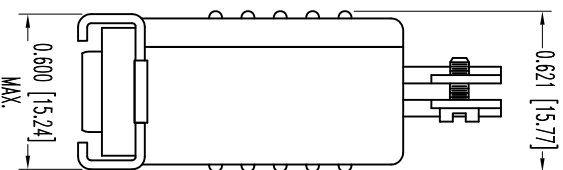
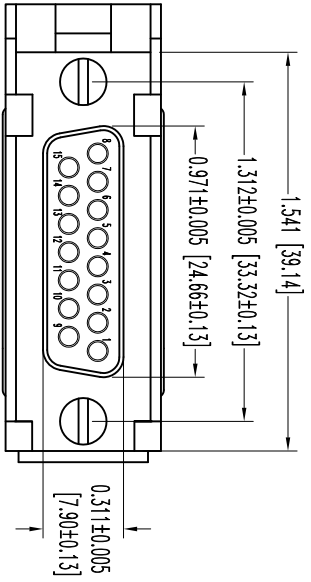



THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE USER HAS TAKEN THE NECESSARY PRECAUTIONS TO AVOID USER ERROR. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

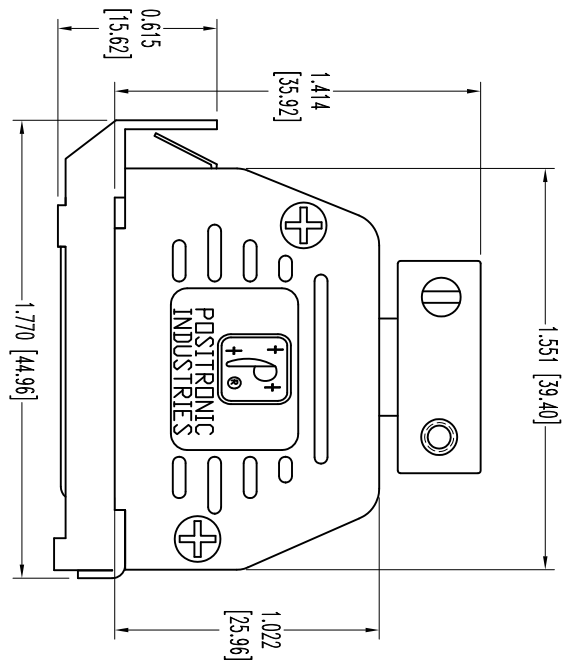

- NOTES:
1. MATERIAL & FINISHES:  
 INSULATOR: GLASS FILLED DAP PER ASTM-D-5948, SDG-F. UL 94V-0, GREEN COLOR.  
 SHELLS: STEEL, ZINC PLATE WITH CHROMATE SEAL.  
 HOOD: GLASS FILLED NYLON, 94V-0, BLACK.  
 LOCK LEVER: STEEL, NICKEL PLATE.  
 CABLE CLAMPS: STEEL, NICKEL PLATE.  
 CABLE CLAMP SCREWS: BRASS, ZINC PLATE WITH CHROMATE SEAL.  
 SCREWS: STEEL, ZINC PLATE WITH CHROMATE SEAL.
  2. DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST STANDARD DENSITY D-SUB PRODUCT PUBLICATION. VISIT [CONNECTPOSITRONIC.COM/PRODUCTS/45/STANDARDENSITYD-SUBMINIATURE](http://CONNECTPOSITRONIC.COM/PRODUCTS/45/STANDARDENSITYD-SUBMINIATURE) OR [CONNECTPOSITRONIC.COM](http://CONNECTPOSITRONIC.COM).
  3. DIMENSIONS ARE IN INCHES [MILLIMETERS].

DATE	REV	REVISION RECORD	APP	DR	CK
4-27-11	NC	ECO 33946	COLM	BS	COLM

SKI2331



**POSITRONIC INDUSTRIES INC.**  
www.connectpositronic.com

FSC# 28198

---

DECIMAL TOL.	± 0.015 [0.38]	SCALE	N.T.S.	DRAWN BY	B SHELLIDY
ANGULAR TOL.	± 5°	RD STRIPS	APPROVED BY	COLE	
DATE	4-27-11	DRAWING NUMBER	RD15S00JVL0	REV.	NC
				SKI2331	