
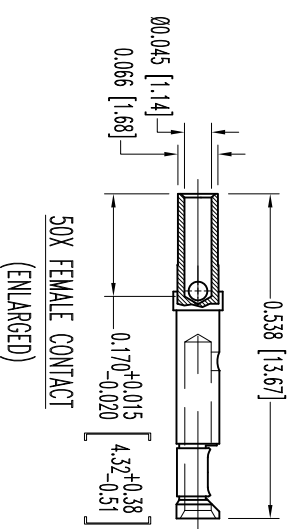
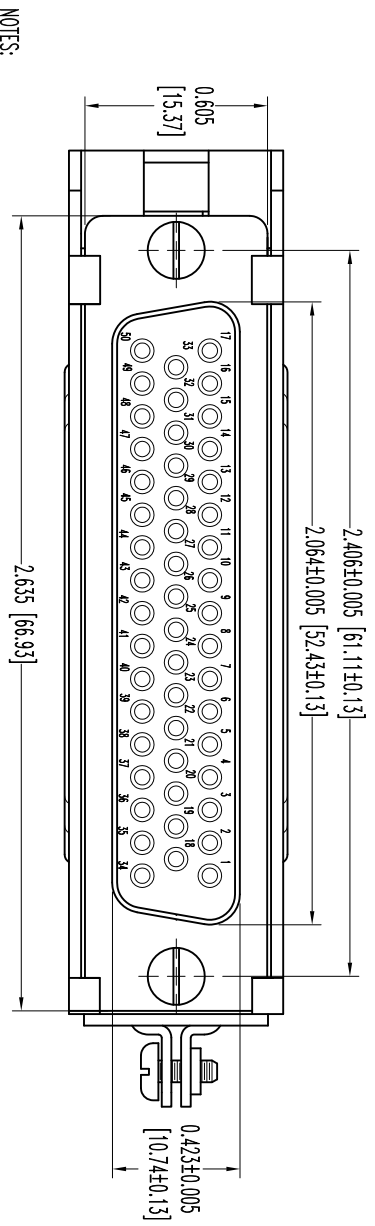
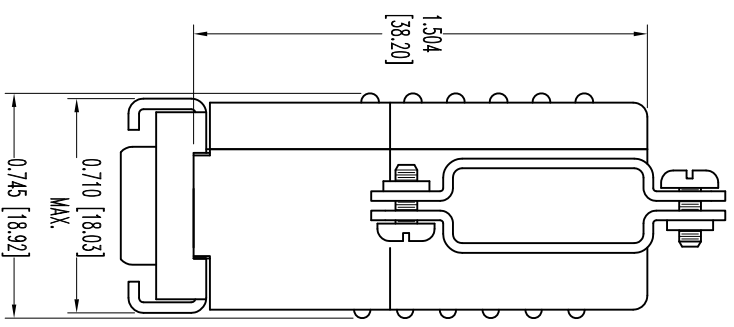



THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC INDUSTRIES. THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER BEAR'S SUCH INFORMATION AT HIS OWN DISCRETION. RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

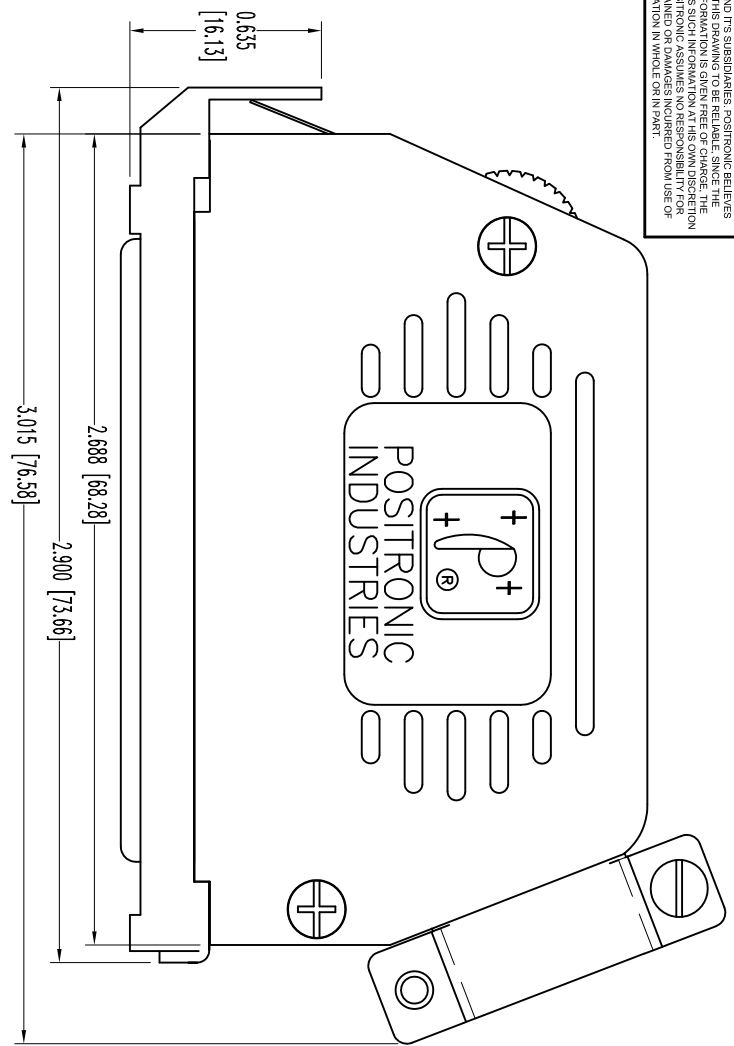

- NOTES:
 1. MATERIALS AND FINISHES:
 INSULATOR: GLASS FILLED DAP PER ASTM-D5948, SDG-F, UL 94V-0, COLOR: GREEN.
 SHELLS: STEEL, ZINC PLATE WITH CHROMATE SEAL.
 CONTACTS: PRECISION MACHINED COPPER ALLOY, GOLD FLASH OVER NICKEL PLATE.
 HOOD: GLASS FILLED POLYESTER, UL 94V-0, COLOR: BLACK.
 CABLE CLAMPS: STEEL WITH NICKEL PLATE.
 CABLE CLAMP SCREWS: BRASS, ZINC PLATE WITH CHROMATE SEAL.
 LOCK LEVER: STEEL WITH NICKEL PLATE.
 SCREWS: STEEL, ZINC PLATE WITH CHROMATE SEAL.

2. DETAILED PRODUCT, MECHANICAL, AND ELECTRICAL INFORMATION IS AVAILABLE IN THE LATEST STANDARD DENSITY D-SUB PRODUCT PUBLICATION. VISIT CONNECTPOSITRONIC.COM/PRODUCTS/45/STANDARDENSITYD-SUBMINIATURE OR CONNECTPOSITRONIC.COM.
 3. DIMENSIONS ARE IN INCHES [MILLIMETERS].

DATE	REV	REVISION RECORD	APP	DR	CK
7-15	NC	ECO 34241	COL	ME	COL



POSITRONIC INDUSTRIES INC.
www.connectpositronic.com

ANGULAR TOL. ± 5°	DECIMAL TOL. ± 0.015 [0.38]	SCALE N.T.S.	DRAWN BY ME	DATE 7-15-11	DRAWING NUMBER SK12478	REV. NC
TITLE RD50S10LV10		RD SERIES		FSCM 28198		
		APPROVED BY COL				

SK12478