THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND IT'S SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK14531

DATE	REV	REVISION RECORD	APP	DR	CK
10-24-12	NC	ECO 37465	COLE	BS	COLE

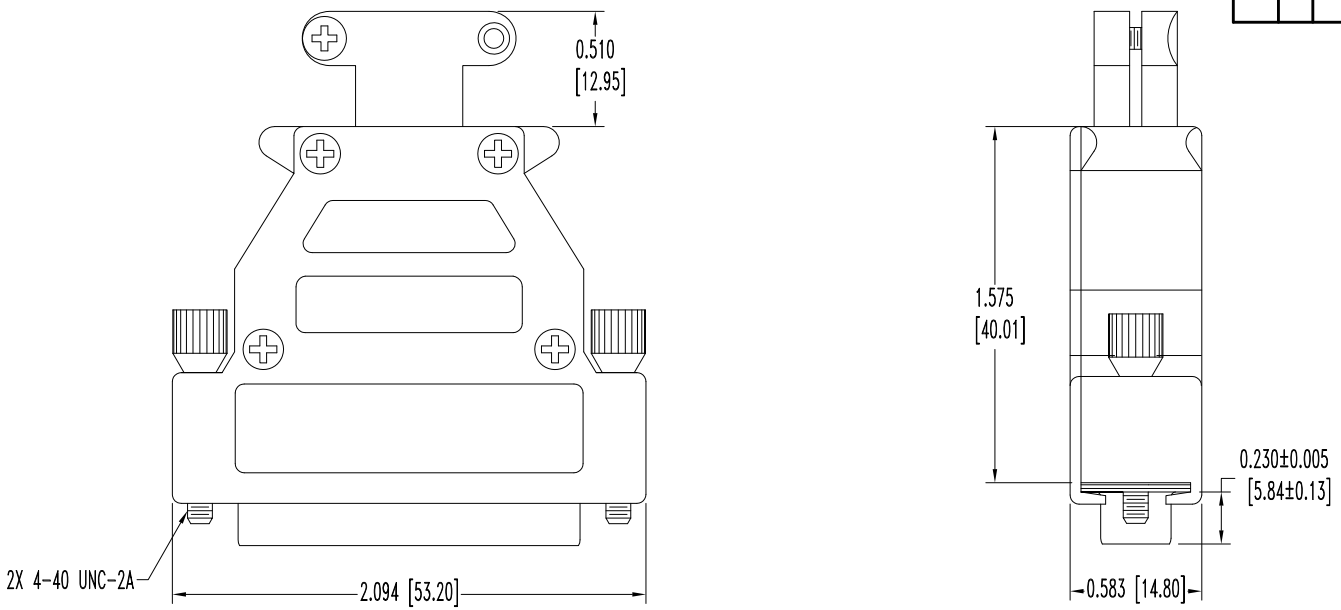

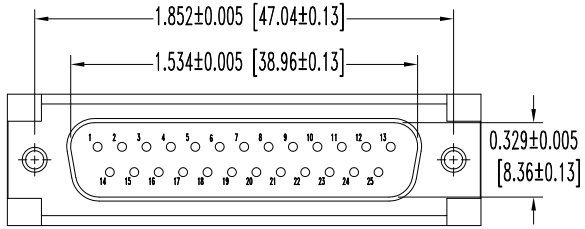

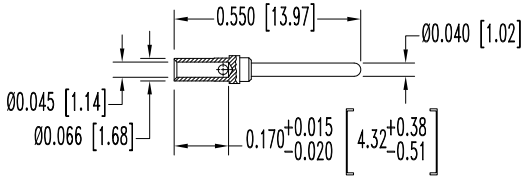

50X MALE CONTACT
ENLARGED

NOTES:

1. MATERIALS AND FINISHES:
   INSULATOR: GLASS FILLED DAP PER ASTM-D5948, SDG-F, UL 94V-0, COLOR: GREEN.
   CONTACTS: PRECISION MACHINED COPPER ALLOY, GOLD FLASH OVER NICKEL PLATE.
   SHELLS: STEEL, ZINC PLATE WITH CHROMATE SEAL.
   HOOD AND CABLE CLAMPS: DIE CAST ZINC.
   JACKSCREWS: STEEL WITH NICKEL PLATE.
2. DETAILED PRODUCT, MECHANICAL, AND ELECTRICAL INFORMATION IS AVAILABLE IN THE LATEST STANDARD DENSITY D-SUB PRODUCT PUBLICATION. VISIT CONNECTPOSITRONIC.COM/PRODUCTS/45/STANDARDDENSITYD-SUBMINIATURE OR CONNECTPOSITRONIC.COM.
3. DIMENSIONS ARE IN INCHES [MILLIMETERS].

POSITRONIC INDUSTRIES INC.
www.connectpositronic.com
FSCM 28198

DECIMAL TOL. ±0.015 [0.38]	RD SERIES	SCALE N.T.S.	DRAWN BY B SHELLEDY APPROVED BY COLE
	TITLE RD25M10GE0		
ANGULAR TOL. ±5°	DATE 10-24-12	DRAWING NUMBER SK14531	REV. NC