



THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSTTRONIC AND ITS SUBSIDIARIES. POSTTRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE SINCE THE INFORMATION WAS OBTAINED FROM THE USER'S OWN DISSECTION AND RISK. POSTTRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION UNLESS OTHERWISE INDICATED.

SK14874

DATE	REV	REVISION RECORD	APP	DR	OK
2-5-13	NC	ECO 38379	COLB	MP	COLB

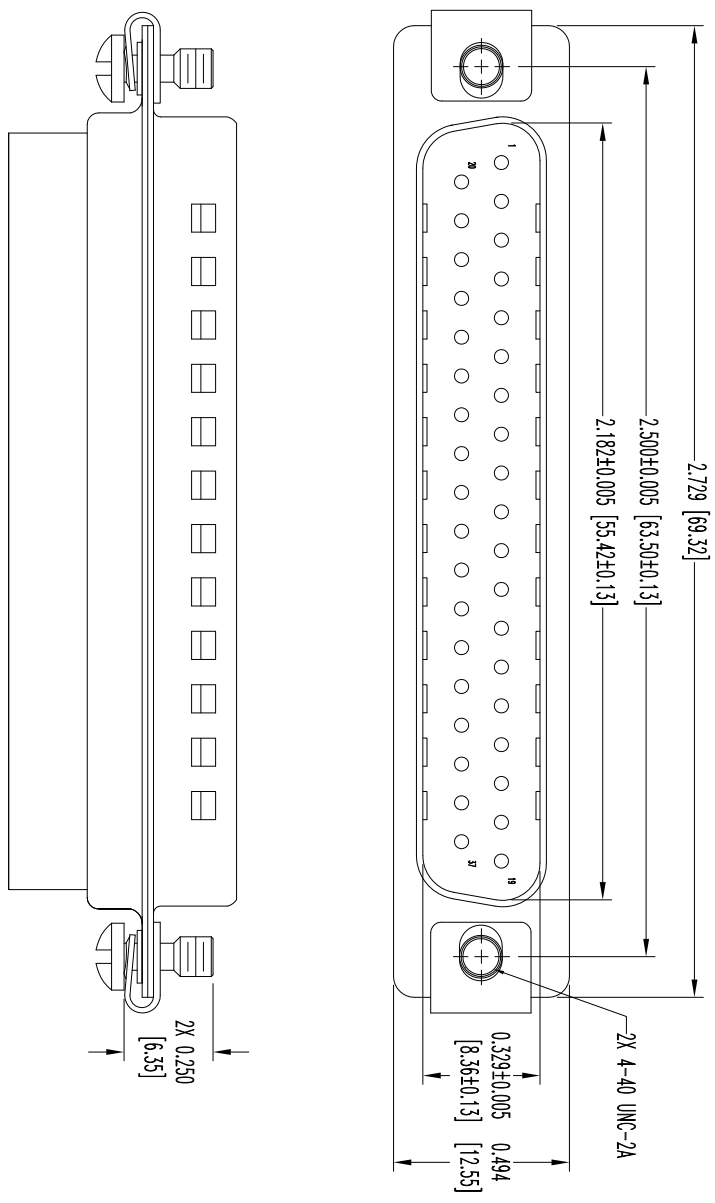

- NOTES:
1. MATERIALS AND FINISHES:  
INSULATOR: GLASS FILLED DAP PER ASTM-D-5948, SD6-F, UL 94V-0, GREEN COLOR.  
SHELLS: STEEL, TIN PLATED AND DIMPLED.  
SCREWS: STEEL, TIN PLATED.  
U-CLIPS: SPRING STEEL, TIN PLATED.
  2. DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST STANDARD DENSITY D-SUB PRODUCT PUBLICATION. VISIT [CONNECTPOSTTRONIC.COM/PRODUCTS/45/STANDARDSDENSITYD-SUBMINIATURE](http://CONNECTPOSTTRONIC.COM/PRODUCTS/45/STANDARDSDENSITYD-SUBMINIATURE) OR [CONNECTPOSTTRONIC.COM](http://CONNECTPOSTTRONIC.COM).
  3. CONNECTORS ARE COMPLIANT TO THE CURRENT ROHS DIRECTIVE.
  4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

 <p><b>POSTTRONIC INDUSTRIES INC.</b> www.connectpositronic.com</p>		RD SERIES		SCALE	N.T.S.	DRAWN BY	MP	FSCM 28198
		RD37M000RF2Z/AA		APPROVED BY		COLB		
DATE	2-5-13	DRAWING NUMBER	SK14874	REV	NC			
DECIMAL TOL.	± 0.015 [0.38]							
ANGULAR TOL.	± 5°							