
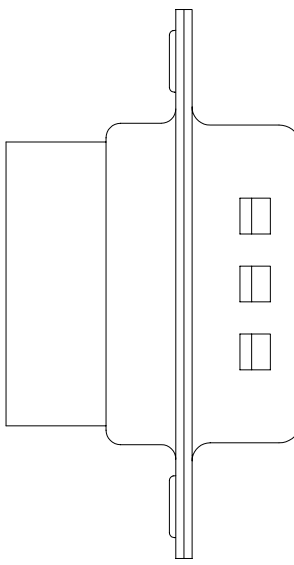
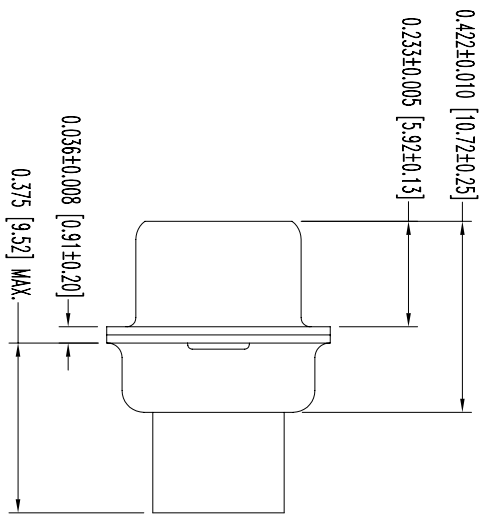


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN WITHOUT WARRANTY, THE USER ASSUMES ALL LIABILITY FOR THE USE OF THE INFORMATION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

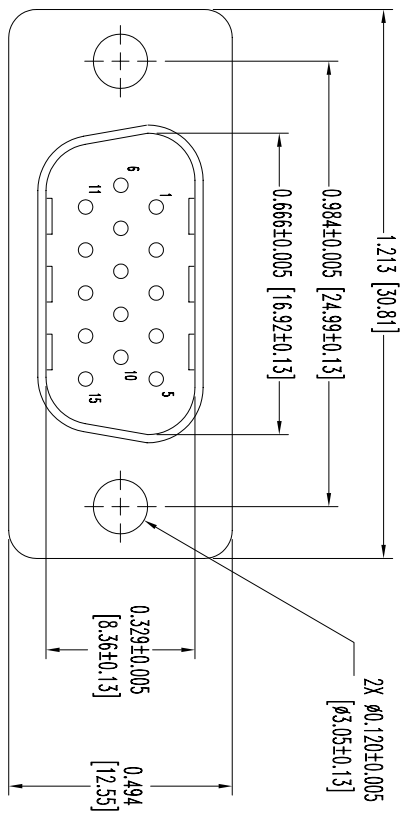

NOTES:

1. MATERIALS AND FINISHES:

INSULATOR: GLASS FILLED PESTER PER MIL-M-24519, UL 94V-0, COLOR BLUE.

SHELLS: STEEL, TIN PLATED AND DIMPLED.

2. ELECTRICAL CHARACTERISTICS:

INSULATION RESISTANCE: 5 G OHMS.

WORKING VOLTAGE: 300 V r.m.s.


3. TEMPERATURE RANGE: -55°C TO +125°C.

4. CONNECTORS ARE ROHS COMPLIANT PER ROHS DIRECTIVE 2002/95/EC OF 27 JAN 2003.

5. DIMENSIONS ARE IN INCHES [MILLIMETERS].

DATE	REV	REVISION RECORD	APP	DR	CK
1-21-08	NC	ECO 28888	RCW	YK	TK

SK9199

 <p><b>POSITRONIC INDUSTRIES INC.</b> www.connectpositronic.com</p>		SCALE		DRAWN BY	
		N.T.S.		YK	
DECIMAL TOL.		DD SPRIRS		APPROVED BY	
± 0.015 [0.38]				RCW	
TITILE		DRAWING NUMBER			
DD SPRIRS		DD15M0000Z/AA			
DATE		DATE		REV.	
1-21-08		1-21-08		NC	
ANGULAR TOL.					
± 5°					