
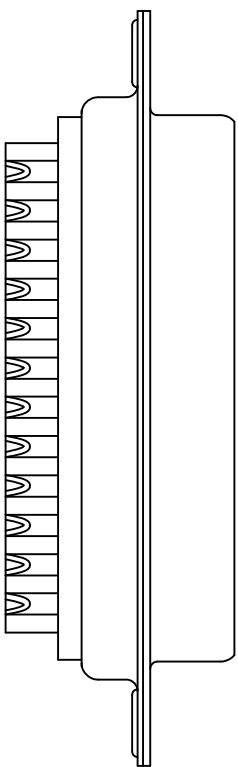
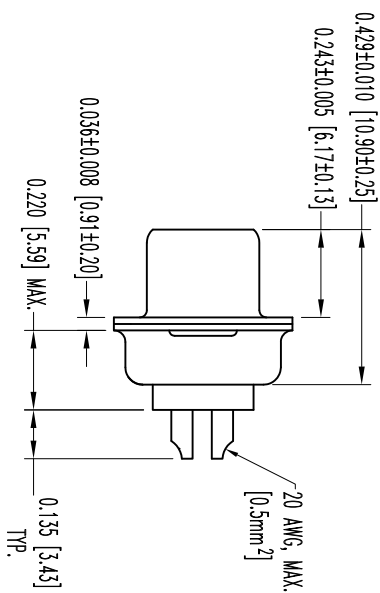


POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL STAFF HAS LIMITED ACCESS TO THE MANUFACTURING PROCESS, POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED AS A RESULT OF SUCH INFORMATION IN WHOLE OR IN PART.

SK13258

DATE	REV	REVISION RECORD	APP	DR	CK
12-9	11	NC	ECO	34861	COLE

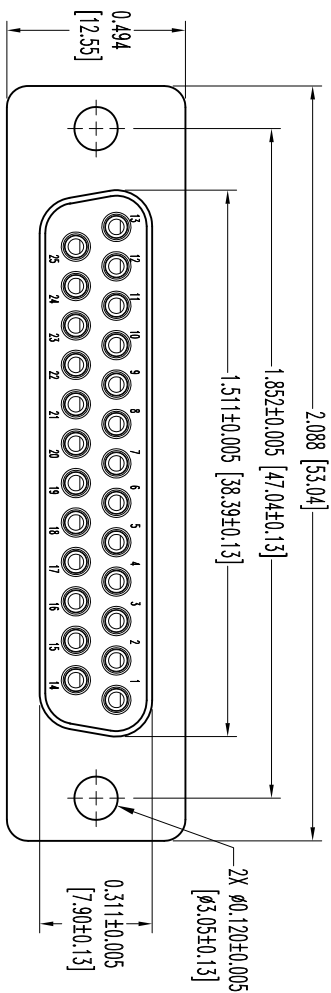


NOTES:

1. MATERIALS AND FINISHES:
INSULATOR: GLASS FILLED DAP PER ASTM-D-5948, SDG-F, UL 94V-0, COLOR GREEN.
CONTACTS: PRECISION MACHINED COPPER ALLOY, WITH GOLD FLASH OVER NICKEL PLATE.
SHELLS: STEEL, ZINC PLATED WITH CHROMATE SEAL.
2. DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST STANDARD DENSITY D-SUBMINIATURE PRODUCT PUBLICATION. VISIT CONNECTPOSITRONIC.COM/PRODUCTS/45/STANDARD-DENSITY-D-SUBMINIATURE OR CONNECTPOSITRONIC.COM.
3. CONNECTORS ARE ROHS COMPLIANT PER ROHS DIRECTIVE 2002/95/EC OF 27 JAN 2003.
4. DIMENSIONS ARE IN INCHES [MILLIMETERS].



POSITRONIC INDUSTRIES INC.
www.connectpositronic.com



DECIMAL TOL.
± 0.015 [0.38]

ANGULAR TOL.
± 5°

HDC SERIES

SCALE
N.T.S.

DRAWN BY
ME

APPROVED BY
COLE

DATE
12-8-11

DRAWING NUMBER
SK13258

REV.
NC

TITLE
HDC25SS20000/AA