
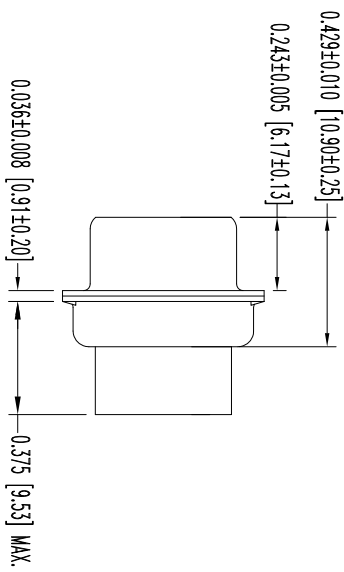



THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE USER HAS NOT SHOWN THIS DRAWING TO BE UNRELIABLE. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

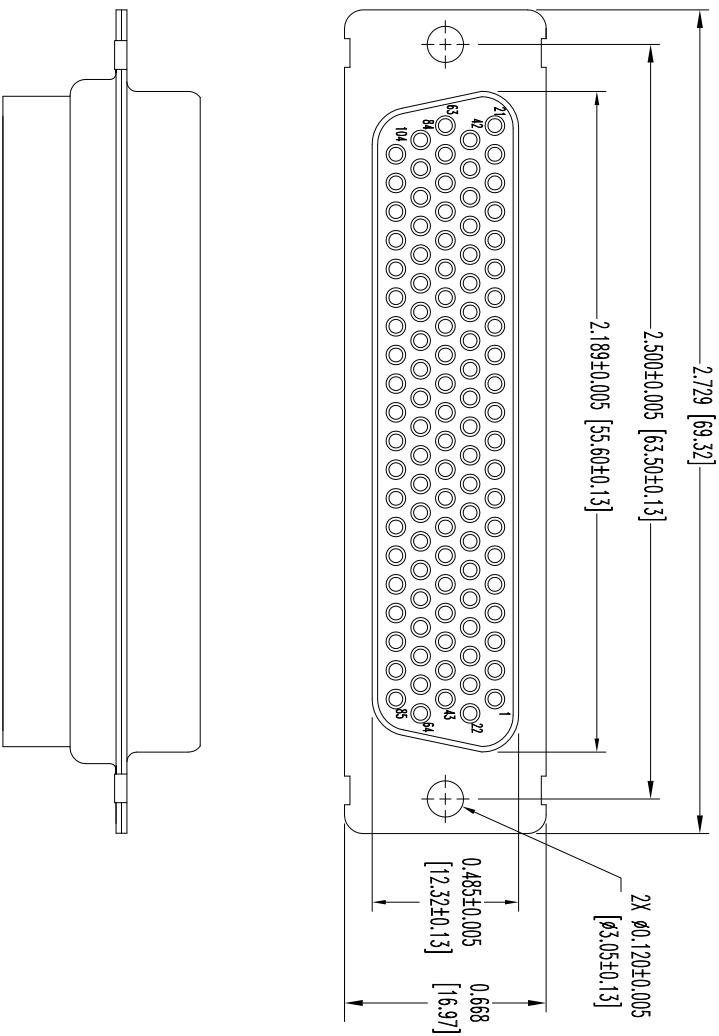

- NOTES:
1. MATERIALS AND FINISHES:
INSULATOR: GLASS FILLED POLYESTER PER ASTM D5927, UL 94V-0, BLUE COLOR.
SHELLS: STEEL, ZINC PLATE WITH CHROMATE SEAL.
 2. DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST HIGH DENSITY D-SUBMINIATURE PRODUCT PUBLICATION. VISIT CONNECTPOSITRONIC.COM/PRODUCTS/59/HIGHDENSITYD-SUBMINIATURE OR CONNECTPOSITRONIC.COM.
 3. CONNECTORS ARE COMPLIANT TO THE CURRENT ROHS DIRECTIVE.
 4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

DATE	REV	REVISION/RECORD	APP	DR	CK
10-25	NC	ECO 34631	COLF	BE	COLF
6-11	A	ECO 39758	COLF	BE	COLF
13					

SK12764

		POSITRONIC INDUSTRIES INC. www.connectpositronic.com		FSCM 28198	
		DD SPRIRS	SCALE N.T.S.	DRAWN BY B. EVANS	APPROVED BY COLF
DECIMAL TOL. ± 0.015 [0.38]		TITLE DD104S00000/AA		DATE 10-25-11	
ANGULAR TOL. $\pm 5^\circ$		DRAWING NUMBER SK12764		REV. A	