
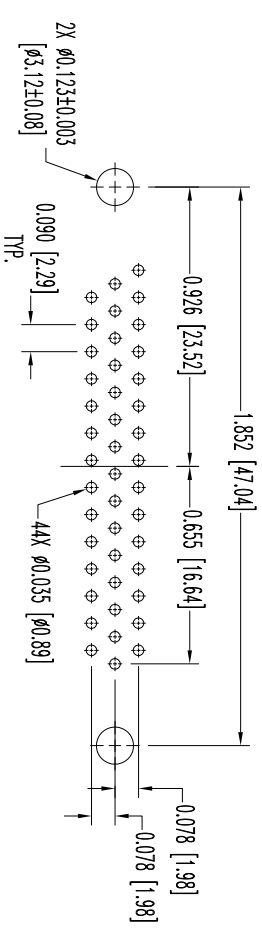
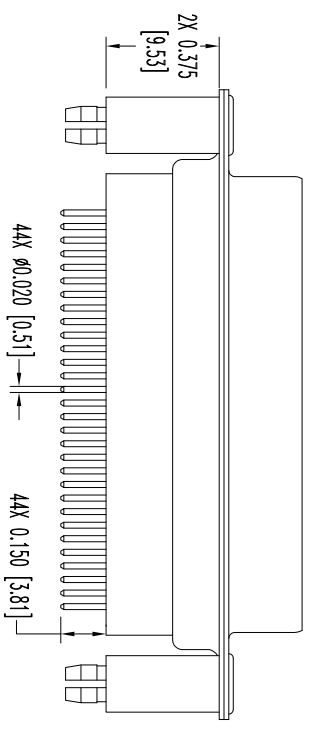
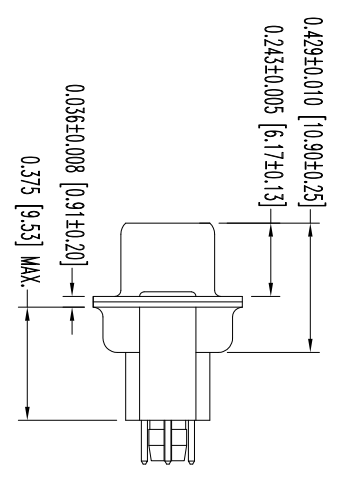


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC INDUSTRIES INC. AND IS THE PROPERTY OF POSITRONIC INDUSTRIES INC. THE INFORMATION IS BEING MADE AVAILABLE TO YOU FOR YOUR INFORMATION ONLY. THE USER BUREAU'S SUCH INFORMATION AT HIS OWN DISCRETION. RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

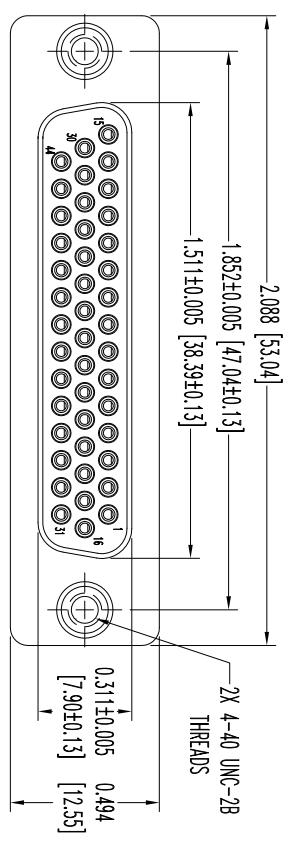

CONTACT HOLE PATTERN

NOTES:

1. MATERIALS AND FINISHES:

- INSULATOR: GLASS FILLED POLYESTER PER ASTM-D5927, UL 94V-0, COLOR: BLUE.
- CONTACTS: PRECISION MACHINED COPPER ALLOY, GOLD FLASH OVER NICKEL PLATE.
- SHELLS: STAINLESS STEEL, PASSIVATED.
- PUSH FASTENERS: PHOSPHOR BRONZE WITH TIN PLATE.

2. DETAILED PRODUCT, MECHANICAL, AND ELECTRICAL INFORMATION IS AVAILABLE IN THE LATEST HIGH DENSITY D-SUB PRODUCT PUBLICATION. VISIT

CONNECTPOSTRONIC.COM/PRODUCTS/59/HIGHDENSITY-SUBMINIATURE OR CONNECTPOSTRONIC.COM.

3. DIMENSIONS ARE IN INCHES [MILLIMETERS].

DATE	REV	REVISION RECORD	APP	DR	CK
8-07	NC	ECO 36543	COLF	BS	COLF

SK14290



**POSITRONIC INDUSTRIES INC.**  
www.connectpositronic.com

FSCM 28198

ANGULAR TOL. ± 5°	DECIMAL TOL. ± 0.015 [0.38]	DD SERIES	SCALE N.T.S.	DRAWN BY B SHELLARDY	DATE 8-07-12	DRAWING NUMBER SK14290	REV. NC
TITLE DD44S3S600S		APPROVED BY COLF					