
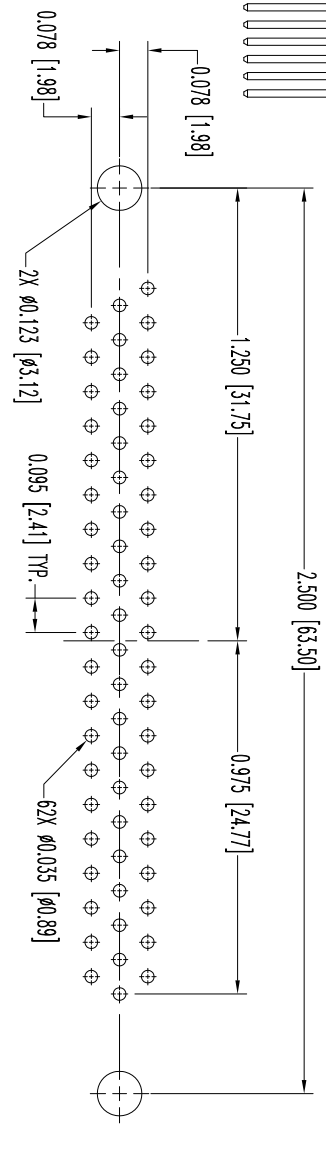
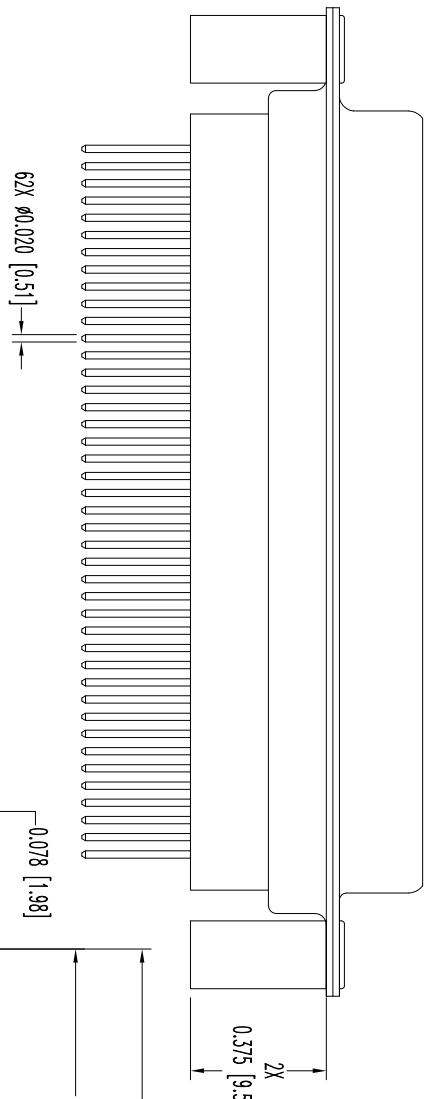
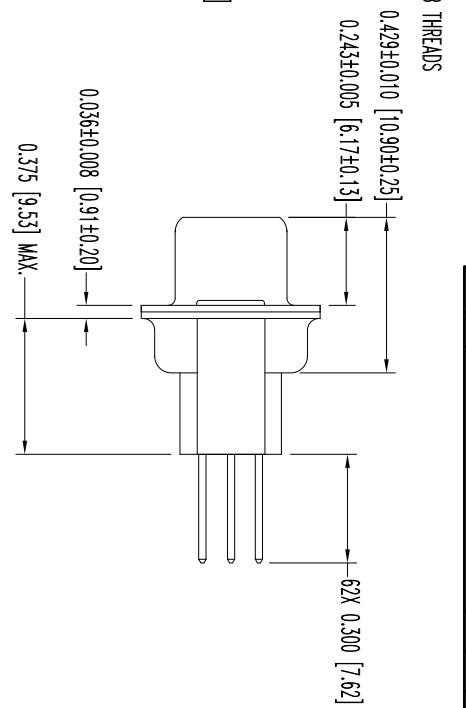


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE USER HAS ASSUMED RESPONSIBILITY FOR THE DESIGN, CONSTRUCTION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

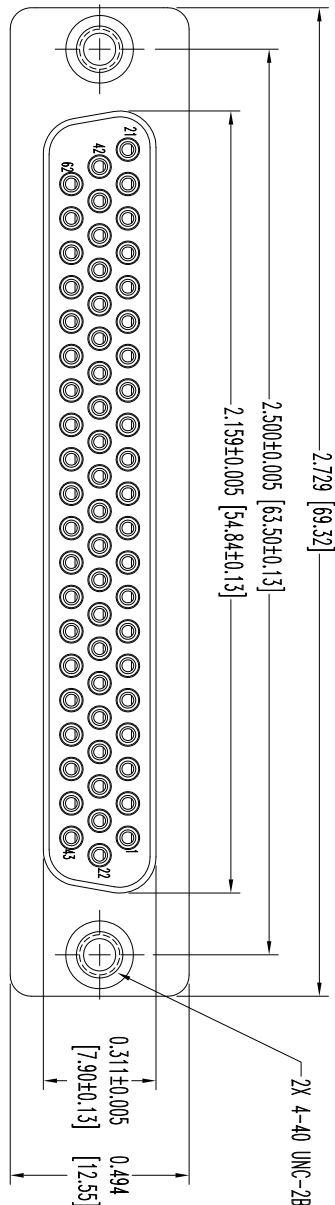

CONTACT HOLE PATTERN

- NOTES:
1. MATERIALS AND FINISHES:
INSULATOR: GLASS FILLED POLYESTER PER MIL-M-24519, UL 94V-0, BLUE COLOR.
CONTACTS: BRASS, GOLD FLASH OVER NICKEL FINISH.
SHEETS: STAINLESS STEEL, PASSIVATED.
SPACERS: STEEL, ZINC PLATE WITH CHROMATE SEAL.
 2. ELECTRICAL CHARACTERISTICS:
INSULATOR RESISTANCE: 5 G OHMS.
CONTACT CURRENT RATING: 5 AMPERES NOMINAL.
INITIAL CONTACT RESISTANCE: 0.005 OHMS MAXIMUM.
WORKING VOLTAGE: 300 V r.m.s.
 3. TEMPERATURE RANGE: -55°C TO +125°C.
 4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

DATE	REV	REVISION/RECORD	APP	DR	CK
1-23-09	NC	ECO 30515	RCW	YK	TK

SK10277

POSITRONIC INDUSTRIES INC.
www.connectpositronic.com FSCM 28198

DD SERIES
DD62SS3S00S

SCALE: N.T.S.
DRAWN BY: R WILLIAMS
APPROVED BY: YK

DATE: 1-23-09
DRAWING NUMBER: SK10277
REV: NC

DECIMAL TOL. ± 0.015 [0.38]
ANGULAR TOL. ± 5°