
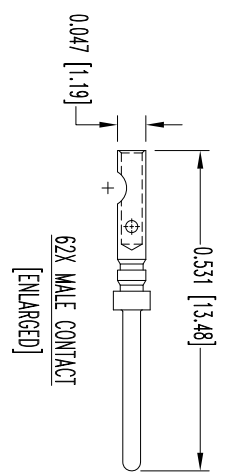
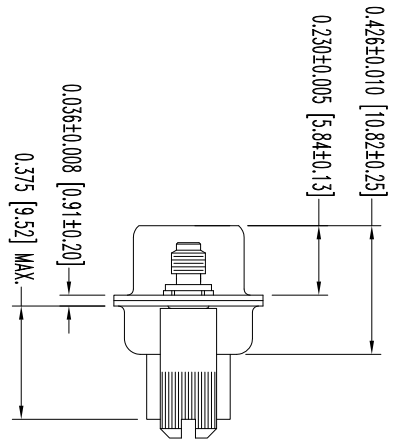


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE USER HAS ASSUMED RESPONSIBILITY FOR THE DESIGN, CONSTRUCTION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION UNLESS OTHERWISE SPECIFIED IN WRITING.

DATE	REV	REVISION/RECORD	APP	DR	CK
5-09	NC	ECO 31033	RCW	BS	COLM

SK10679

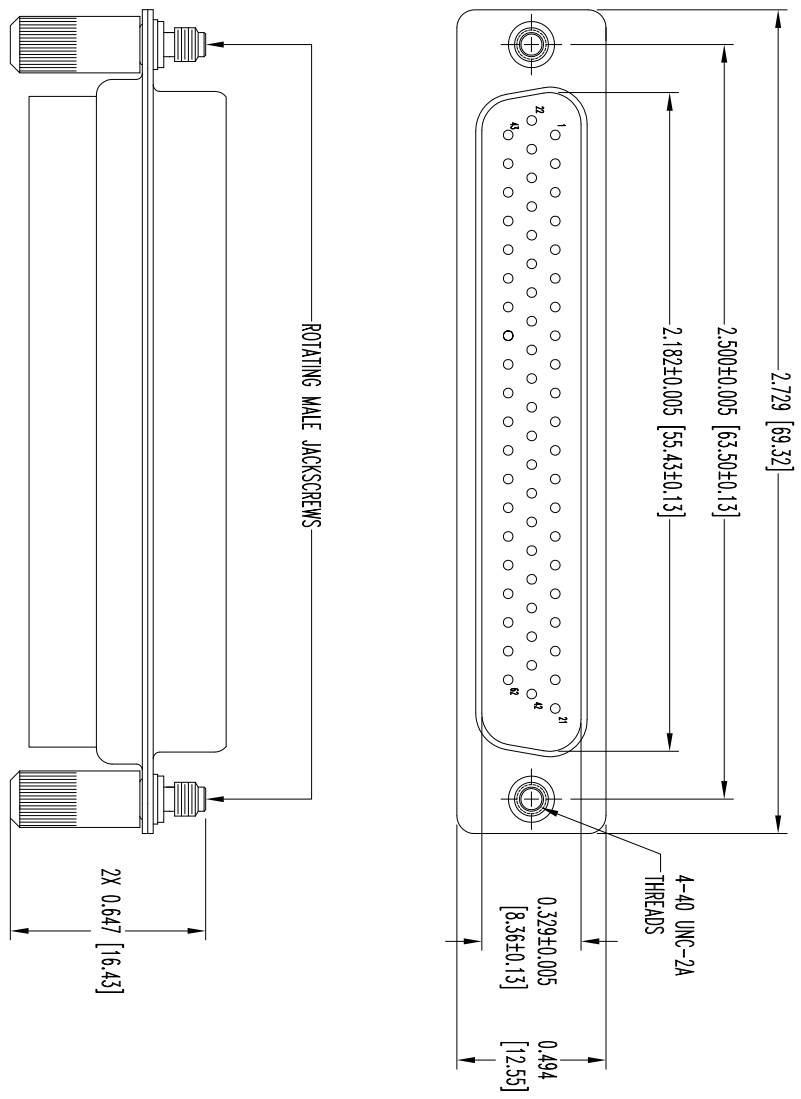


NOTES:

1. MATERIALS AND FINISHES:

- INSULATOR: GLASS FILLED POLYESTER PER MIL-M-24519, UL 94V-0, COLOR: BLUE.
- CONTACTS: PRECISION MACHINED BRASS, GOLD FLASH OVER NICKEL PLATE.
- SHELLS: STEEL, ZINC PLATE WITH CHROMATE SEAL.
- JACKSCREWS: STEEL, ZINC PLATE WITH CHROMATE SEAL.

2. ELECTRICAL CHARACTERISTICS:

- CONTACT CURRENT RATING: 5 AMPERES NOMINAL.
- INITIAL CONTACT RESISTANCE: 0.005 OHMS MAX.
- INSULATOR RESISTANCE: 5 G OHMS
- WORKING VOLTAGE: 300 V r.m.s.
- TEMPERATURE RANGE: -55°C TO +125°C
- DIMENSIONS ARE IN INCHES [MILLIMETERS]

 <p>POSITRONIC INDUSTRIES INC. www.connectpositronic.com</p>		SCALE		DRAWN BY	
		N.T.S.		B SHELLBOY	
DD SERIES		APPROVED BY		R WILLIAMS	
TITLE		DD62M200E0			
DATE		DRAWING NUMBER		REV.	
5-06-09		SK10679		NC	
DECIMAL TOL.		ANGULAR TOL.			
± 0.015 [0.38]		± 5°			
		FSCM 28198			