
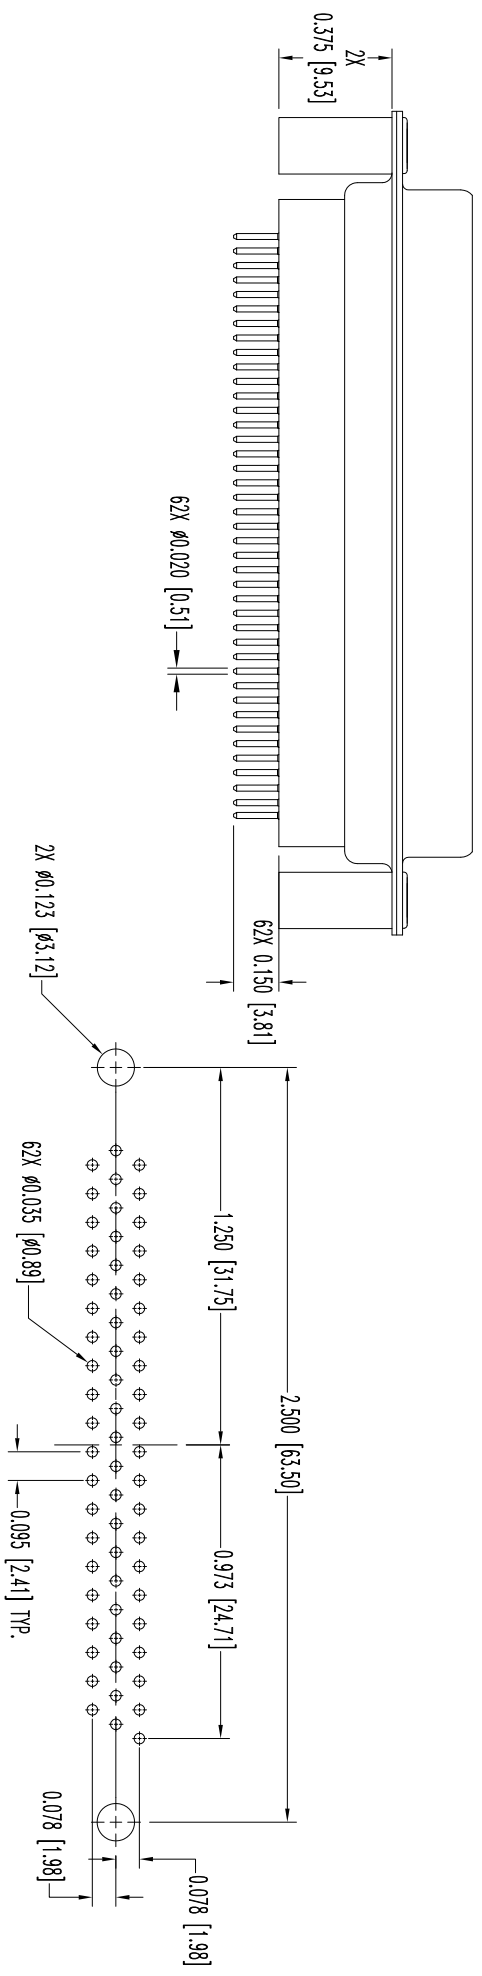



THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE USER HAS OBTAINED THIS INFORMATION FROM POSITRONIC. POSITRONIC MAKES NO REPRESENTATION OR WARRANTY, EXPRESS OR IMPLIED, AS TO THE ACCURACY, COMPLETENESS, OR RELIABILITY OF THE RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION UNLESS OTHERWISE STATED ON THIS DRAWING.

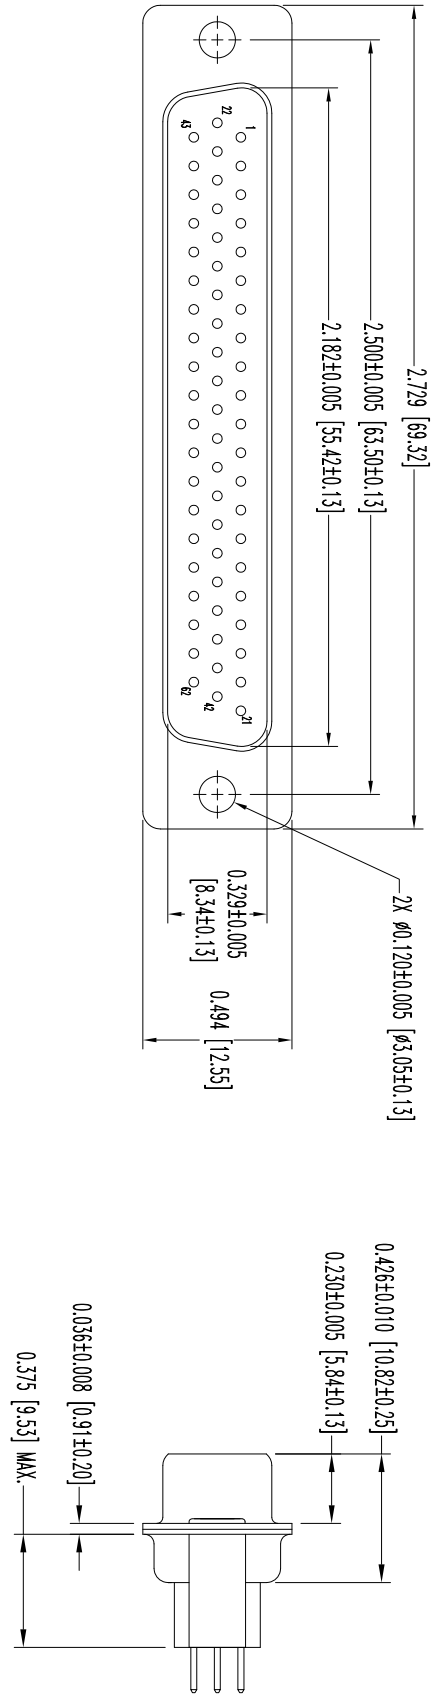

CONTACT HOLE PATTERN

- NOTES:
- MATERIALS AND FINISHES:**
 INSULATOR: GLASS FILLED POLYESTER PER MIL-M-24519, UL 94V-0, BLUE COLOR.
 CONTACTS: PRECISION MACHINED HIGH TENSILE COPPER ALLOY, GOLD FLASH OVER NICKEL FINISH.
 SHELLS: STEEL, ZINC PLATE WITH CHROMATE SEAL.
 SPACERS: STEEL, ZINC PLATE WITH CHROMATE SEAL.
 - ELECTRICAL CHARACTERISTICS:**
 CONTACT CURRENT RATING: 5 AMPERES NOMINAL.
 INITIAL CONTACT RESISTANCE: 0.005 OHMS MAXIMUM.
 INSULATOR RESISTANCE: 5 G OHMS.
 WORKING VOLTAGE: 300 V. r. m. s.
 TEMPERATURE RANGE: -55°C TO +125°C.
 - DIMENSIONS ARE IN INCHES [MILLIMETERS].**

 <p>POSITRONIC INDUSTRIES INC. www.connectpositronic.com FSCM 28198</p>		DATE	DRAWING NUMBER	REV.
		2-13-08	SK92933	NC
DECIMAL TOL.	SCALE	DRAWN BY	REV.	
± 0.015 [0.38]	N.T.S.	R WILLIAMS	NC	
ANGULAR TOL.	TITLE	APPROVED BY	REV.	
± 9°	DD SPRINGS	R WILLIAMS	NC	
	DD62M3S000		REV.	
			NC	

DATE	REV	REVISION/RECORD	APP	DR	CK
2-13-08	NC	ECO 28998	KCW	YK	TK

SK92933