

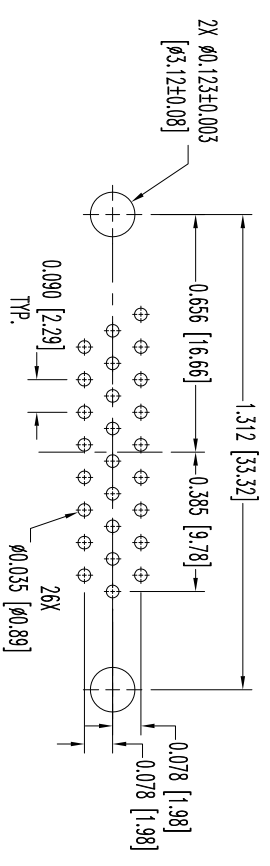
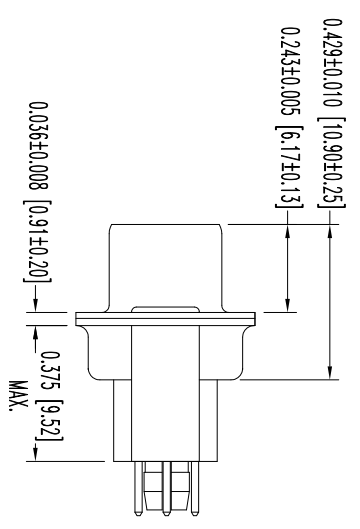


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC INDUSTRIES INC. THE DATA ON THIS DRAWING TO BE RELIABLE SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE. THE USER EMPLOYER'S SUCH INFORMATION AT HIS OWN DISCRETION. POSITRONIC INDUSTRIES INC. ASSUMES NO LIABILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

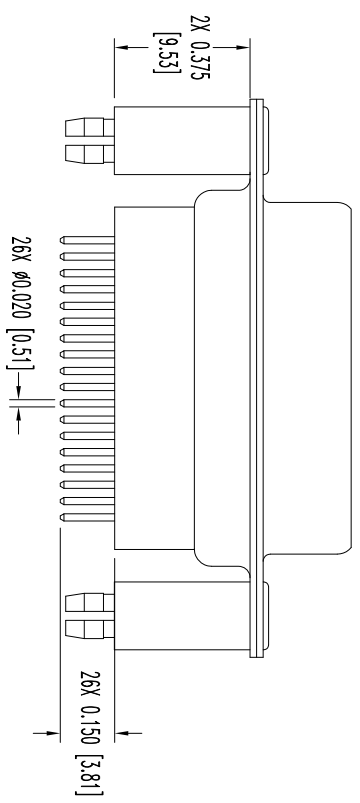

CONTACT HOLE PATTERN

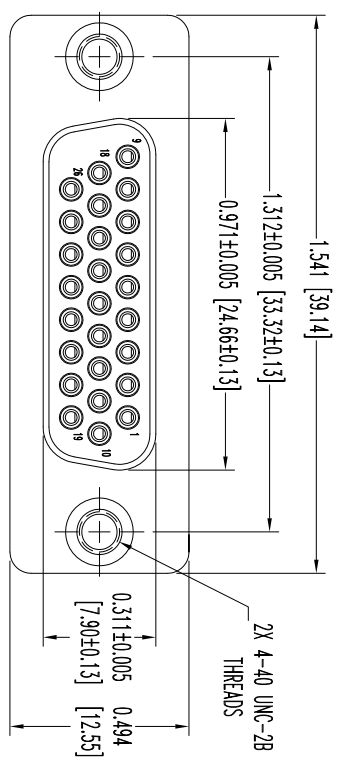

POSITRONIC INDUSTRIES INC.
www.connectpositronic.com FSCM 28198

| | | | | | |
|--------------|-----------------|----------------|------------|----------|----|
| DATE | 1-20-09 | DRAWING NUMBER | SK10246 | REV. | B |
| DD SERIES | DD26SS3S600X/AA | SCALE | N.T.S. | DRAWN BY | YK |
| DECIMAL TOL. | ± 0.015 [0.38] | APPROVED BY | R WILLIAMS | | |
| ANGULAR TOL. | ± 5° | | | | |

- NOTES:
1. MATERIALS AND FINISHES:
INSULATOR: GLASS FILLED POLYESTER PER ASTM D5927, UL 94V-0, BLUE COLOR.
CONTACTS: PRECISION MACHINED COPPER ALLOY, GOLD FLASH OVER NICKEL FINISH.
SHELLS: STEEL, TIN PLATE.
SPACERS: PHOSPHOR BRONZE, TIN PLATE.
 2. DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST HIGH DENSITY D-SUB PRODUCT PUBLICATION. VISIT CONNECTPOSITRONIC.COM/PRODUCTS/59/HIGHDENSITYD-SUBMINIATURE OR CONNECTPOSITRONIC.COM.
 3. CONNECTORS COMPLIANT TO THE CURRENT ROHS DIRECTIVE.
 4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

SK10246

| DATE | REV | REVISION RECORD | APP | DR | CK |
|----------|-----|-----------------|------|----|------|
| 1-20-09 | NC | ECO 30500 | RCW | YK | TK |
| 4-7-11 | A | ECO 32333 | COLB | ME | COLB |
| 11-27-12 | B | ECO 37843 | COLB | BE | COLB |