
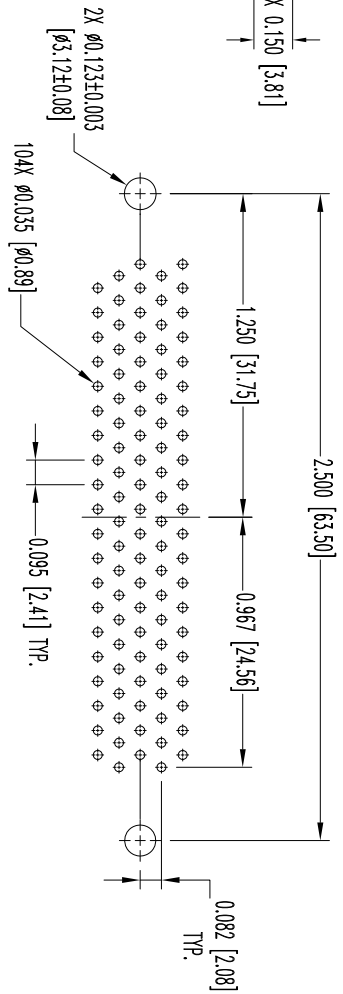
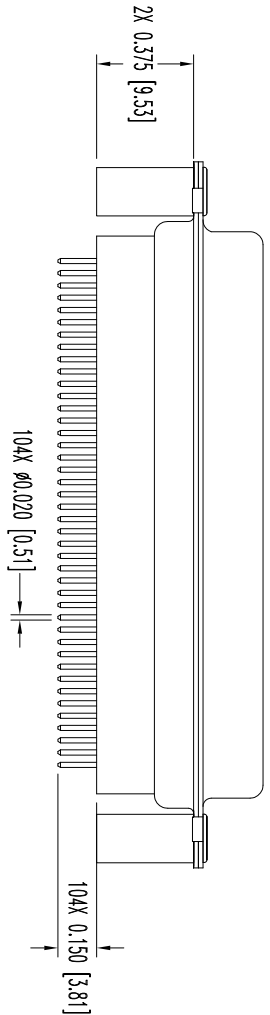
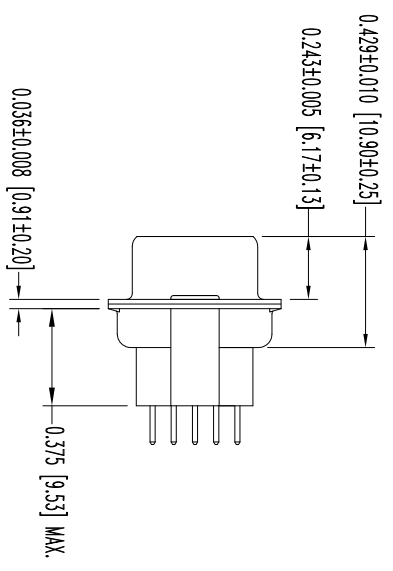


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE USER ASSUMES RESPONSIBILITY FOR THE USE OF THE INFORMATION, POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

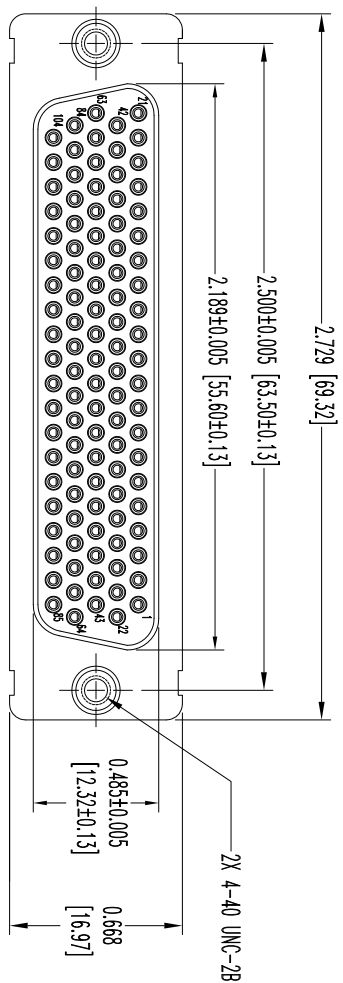

CONTACT HOLE PATTERN

- NOTES:
1. MATERIALS AND FINISHES:
INSULATOR: GLASS FILLED POLYESTER PER ASTM D5927, UL 94V-0, BLUE COLOR.
CONTACTS: BRASS, GOLD FLASH OVER NICKEL FINISH.
SHELS: STEEL, ZINC PLATE WITH CHROMATE SEAL.
SPACERS: STEEL, ZINC PLATE AND CHROMATE SEAL.
 2. DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST HIGH DENSITY D-SUBMINIATURE PRODUCT PUBLICATION. VISIT CONNECTPOSITRONIC.COM/PRODUCTS/59/HIGHDENSITYD-SUBMINIATURE OR CONNECTPOSITRONIC.COM.
 3. CONNECTORS ARE COMPLIANT TO THE CURRENT ROHS DIRECTIVE.
 4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

DATE	REV	REVISION/RECORD	APP	DR	CK
10-27	11	NC	ECO	34641	COLF LO COLF
6-17	13	A	ECO	39827	TK BE TK

SK12834



POSITRONIC INDUSTRIES INC.
www.connectpositronic.com

DECIMAL TOL.	DD SERIES	SCALE	DRAWN BY	FSCM 28198
± 0.015 [0.38]		N.T.S.	L. OMENS	
ANGULAR TOL.	TITLE	APPROVED BY	COLF	
± 5°	DD104S3S000/AA			
DATE	DRAWING NUMBER	REV.		
10-27-11	SK12834	A		