
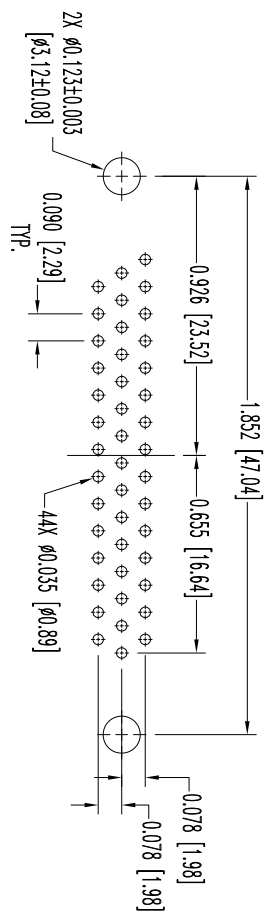
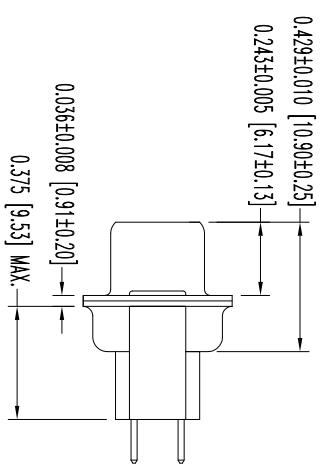
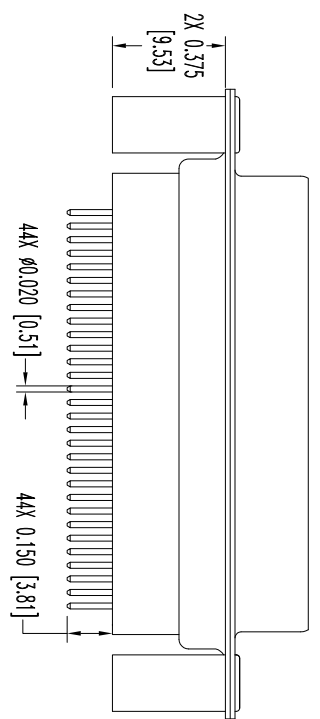


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO CONNECTRONIC AND IS SUBJECT TO THE SUPERSEEDING BELIEFS, TECHNICAL INFORMATION AND KNOWLEDGE OF THE USER EMPLOYER. SUCH INFORMATION IS GIVEN FREE OF CHARGE. THE USER EMPLOYER'S SUCH INFORMATION AT HIS OWN DISCRETION. CONNECTRONIC ASSUMES NO LIABILITY FOR SUCH INFORMATION IN WHOLE OR IN PART.

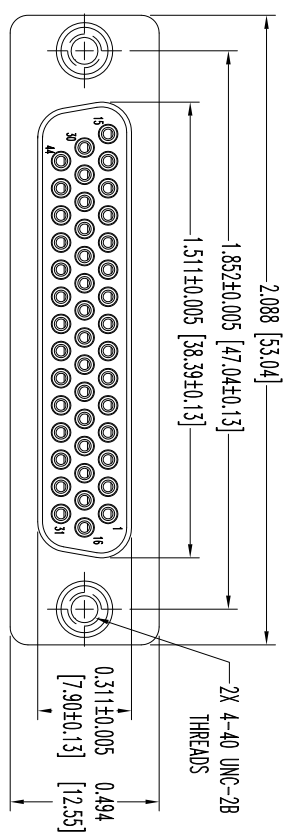

CONTACT HOLE PATTERN

- NOTES:
1. MATERIALS AND FINISHES:  
INSULATOR: GLASS FILLED POLYESTER PER ASTM D5927, UL 94V-0, BLUE COLOR.  
CONTACTS: BRASS, GOLD FLASH OVER NICKEL FINISH.  
SHELLS: STEEL, ZINC PLATE WITH CHROMATE SEAL.  
SPACERS: STEEL, ZINC PLATE WITH CHROMATE SEAL.
  2. DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST HIGH DENSITY D-SUB PRODUCT PUBLICATION. VISIT [CONNECTRONS.COM/PRODUCTS/59/HIGHDENSITY-D-SUBMINATURE](http://CONNECTRONS.COM/PRODUCTS/59/HIGHDENSITY-D-SUBMINATURE) OR [CONNECTRONS.COM](http://CONNECTRONS.COM).
  3. CONNECTORS ARE COMPLIANT TO THE CURRENT ROHS DIRECTIVE.
  4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

**POSITRONIC INDUSTRIES INC.**  
www.connectrongs.com FSCM 28198

DATE	10-28-11	DRAWING NUMBER	SK12855	REV.	A
TITLE	DD44S3S000/AA				
DD SERIES	SCALE	DRAWN BY	APPROVED BY	DATE	REV.
	N.T.S.	L. OWENS	COLE		
DECIMAL TOL.	± 0.015 [0.38]	ANGULAR TOL.	± 5°		

SK12855

DATE	REV	REVISION/RECORD	APP	DR	CK
10-28-11	NC	ECO 34643	COLE	LO	COLE
7-15-13	A	ECO 39836	COLE	BE	COLE