
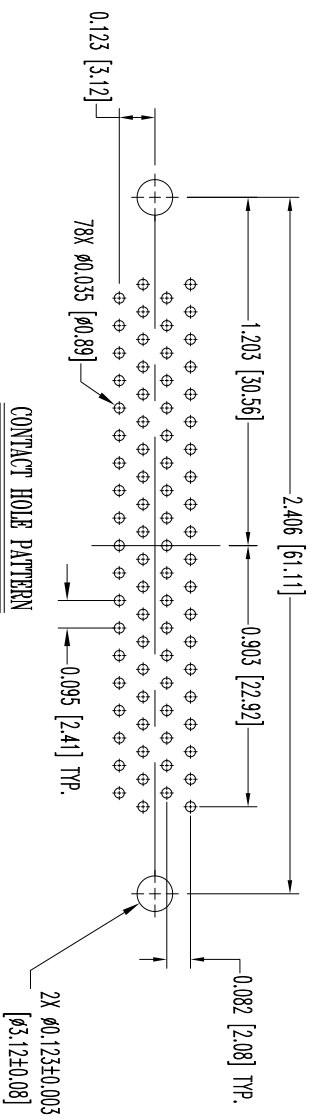
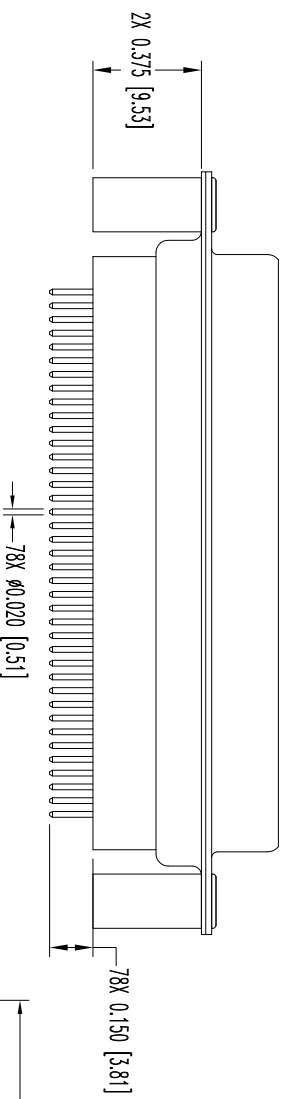
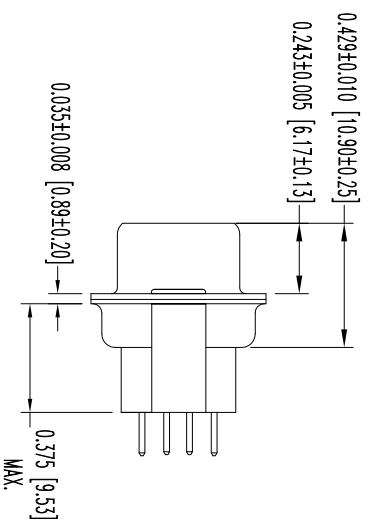


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND IS SUBMITTED UNDER NON-DISCLOSURE AGREEMENT. THE USER EMPLOYER'S SUCH INFORMATION IS GIVEN FREE OF CHARGE. THE USER EMPLOYER ASSUMES ALL LIABILITY FOR SUCH INFORMATION IN WHOLE OR IN PART.

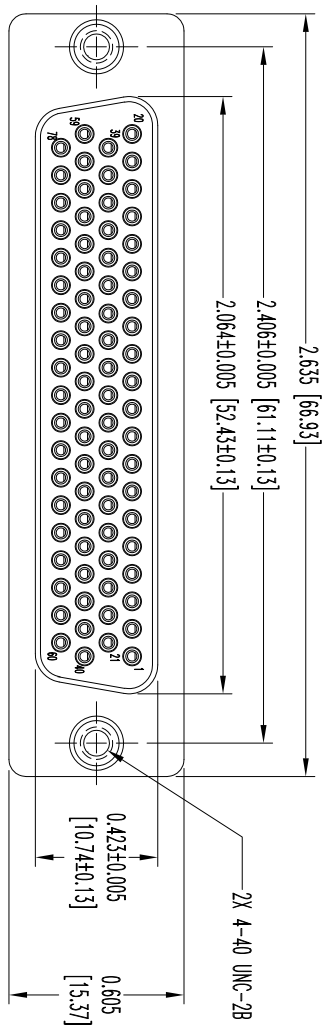

- NOTES:
1. MATERIALS AND FINISHES:
 INSULATOR: GLASS FILLED POLYESTER PER ASTM D5927, UL 94V-0, BLUE COLOR.
 CONTACTS: PRECISION MACHINED COPPER ALLOY, GOLD FLASH OVER NICKEL FINISH.
 SHELLS: STEEL, ZINC PLATE WITH CHROMATE SEAL.
 SPACERS: STEEL, ZINC PLATE AND CHROMATE SEAL.
 2. DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST HIGH DENSITY D-SUBMINIATURE PRODUCT PUBLICATION. VISIT CONNECTPOSITRONIC.COM/PRODUCTS/59/HIGHDENSITYD-SUBMINIATURE OR CONNECTPOSITRONIC.COM.
 3. CONNECTORS ARE COMPLIANT TO THE CURRENT ROHS DIRECTIVE.
 4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

DATE	REV	REVISION/RECORD	APP	DR	CK
10-28-11	NC	ECO 34643	COLE	LO	COLE
7-15-13	A	ECO 39837	COLE	BE	COLE

SK12860



POSITRONIC INDUSTRIES INC.
www.connectpositronic.com
 FSCM 28198

DECIMAL TOL. ± 0.015 [0.38]	SCALE N.T.S.	DRAWN BY I. OWENS
ANGULAR TOL. ± 5°	TITLE DD SERIES	APPROVED BY COLE
DATE 10-28-11	DRAWING NUMBER DD78S3S000/AA	REV. A