


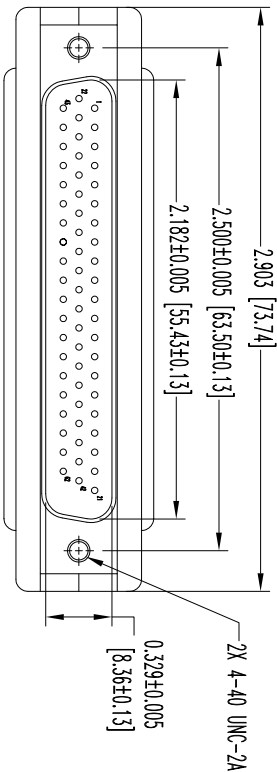
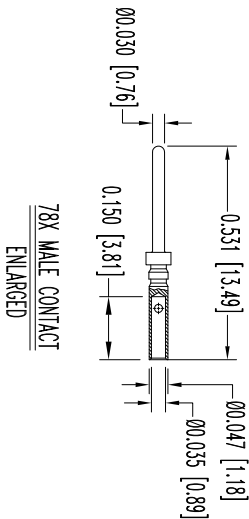
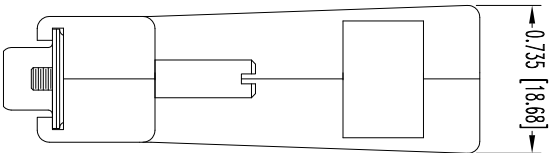


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC INDUSTRIES INC. AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. THE USER EMPLOYING SUCH INFORMATION AT HIS OWN DISCRETION ASSUMES ALL LIABILITY AND RESPONSIBILITY FOR THE RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

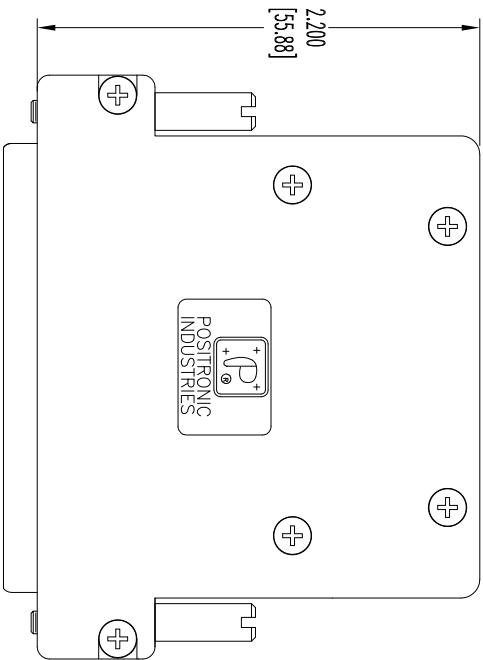

TYPICAL INSERT

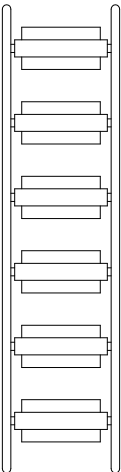

INSERT TREE ASSEMBLY

NOTES:

1. MATERIALS AND FINISHES:

INSULATOR: GLASS FILLED POLYESTER PER ASTM-D5927, UL 94V-0, COLOR: BLUE.
CONTACTS: PRECISION MACHINED COPPER ALLOY, GOLD FLASH OVER NICKEL PLATE.
SHELLS AND JACKSCREWS: STEEL, ZINC PLATE WITH CHROMATE SEAL.
HOOD AND INSERT: COMPOSITE, CONDUCTIVE VOLUME RESISTIVITY
(1.0 OHM-CM MAX.), UL94V-0.

ATTENUATION: 40+ DECIBELS.

SCREWS: POSSIATED, STAINLESS STEEL.

2. DETAILED PRODUCT, MECHANICAL, AND ELECTRICAL INFORMATION IS AVAILABLE IN THE LATEST HIGH DENSITY D-SUB PRODUCT

PUBLICATION. VISIT CONNECTPOSITRONIC.COM/PRODUCTS/59/HIGHDENSITY-SUBMINIATURE OR CONNECTPOSITRONIC.COM.

3. DIMENSIONS ARE IN INCHES [MILLIMETERS].


DATE	REV	REVISION/RECORD	APP	DR	CK
3-23-12	NC	ECO 35423	COLF	MP	COLF

SK13951



POSITRONIC
INDUSTRIES INC.
www.connectpositronic.com

FSCM 28198



± 0.015 [0.38]

DD SERIES

N.T.S.

APPROVED BY
COLF

MP

TITLE

DD62M10Z00

DATE

3-23-12

DRAWING NUMBER

SK13951

REV.

NC