
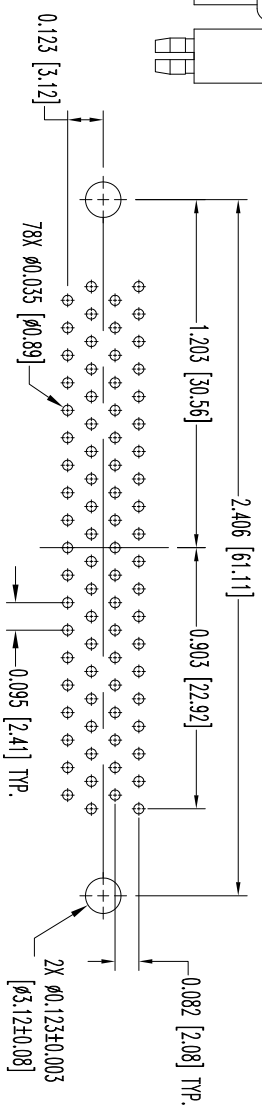
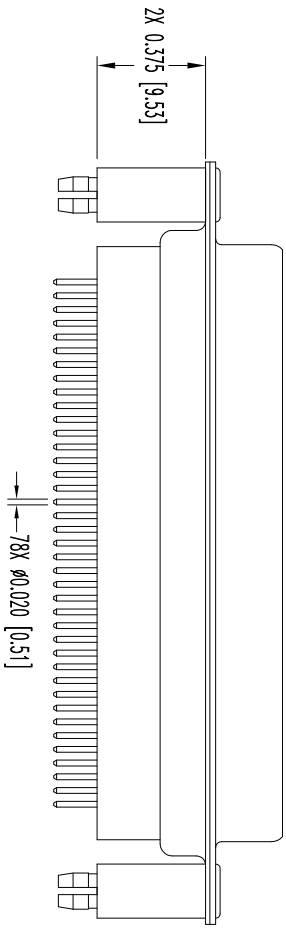
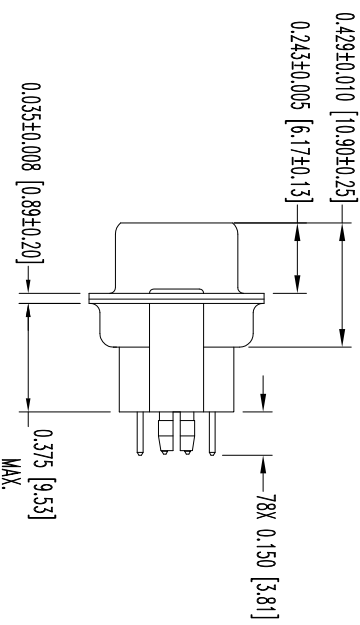


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE DRAWING IS FOR INFORMATIONAL PURPOSES ONLY, POSITRONIC TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE. THE INFORMATION IS NOT TO BE USED FOR ANY PURPOSES OF DESIGN AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

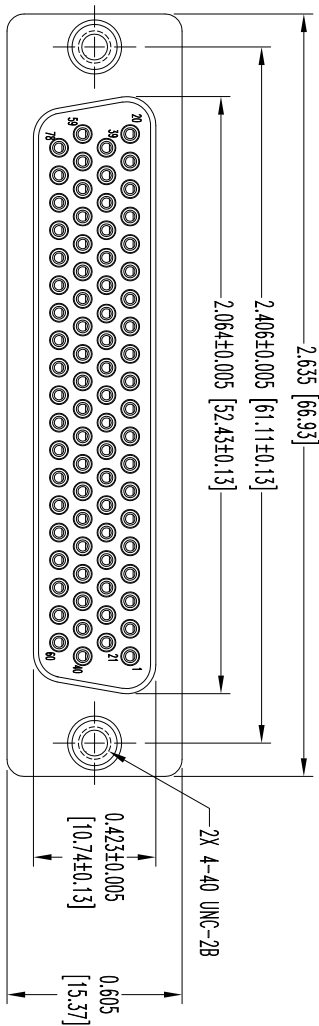

CONTACT HOLE PATTERN

DATE	REV	REVISION RECORD	APP	DR	CK
4-25	NC	ECO 35606	COLE	BS	COLE

SK14040

- NOTES:
1. MATERIALS AND FINISHES:
INSULATOR: GLASS FILLED POLYESTER PER ASTM-D5927, UL 94V-0, COLOR: BLUE.
CONTACTS: PRECISION MACHINED COPPER ALLOY, GOLD FLASH OVER NICKEL PLATE.
SHEETS: STAINLESS STEEL, PASSIVATED.
PUSH FASTENERS: PHOSPHOR BRONZE WITH TIN PLATE.
 2. DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST HIGH DENSITY D-SUB PRODUCT PUBLICATION. VISIT CONNECTPOSITRONIC.COM/PRODUCTS/59/HIGHDENSITYD-SUBMINIATURE OR CONNECTPOSITRONIC.COM.
 3. DIMENSIONS ARE IN INCHES [MILLIMETERS].

		POSITRONIC INDUSTRIES INC. www.connectpositronic.com		FSCM 28198		
		DD SERIES	SCALE N.T.S.	DRAWN BY B SHELLBOY	APPROVED BY COLE	DATE 4-25-12
DECIMAL TOL. ± 0.015 [0.38]	TITLE DD78S3S600S	ANGULAR TOL. ± 5°	REV. NC			