
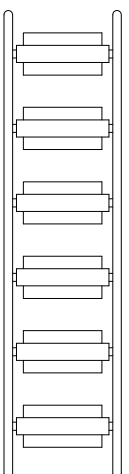

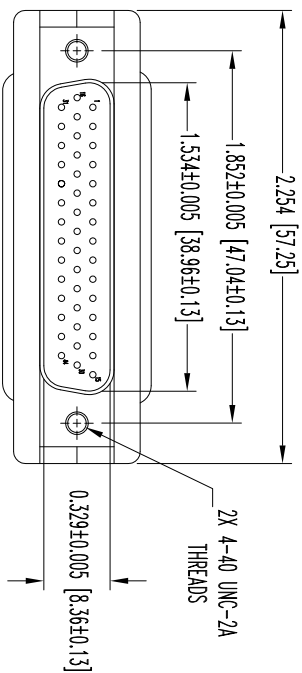
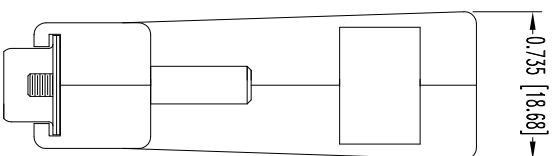


POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION. POSITRONIC INDUSTRIES ASSUMES NO LIABILITY AND RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

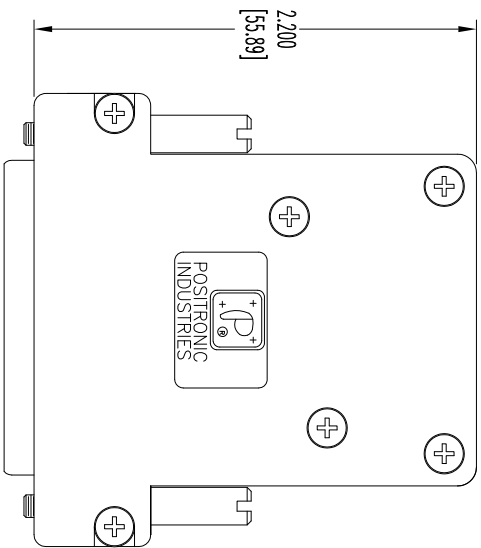

DATE	REV	REVISION RECORD	APP	DR	CK
5-18-12	NC	ECO 35853	COLF	BS	COLF

SK14097

- NOTES:
1. MATERIALS AND FINISHES:  
INSULATOR: GLASS FILLED POLYESTER PER ASTM-D5927, UL 94V-0, COLOR: BLUE.  
CONTACTS: PRECISION MACHINED COPPER ALLOY, GOLD FLASH OVER NICKEL PLATE.  
SHELLS: STAINLESS STEEL, PASSIVATED.  
HOOD: CONDUCTIVE COMPOSITE.  
JACKSCREWS: STAINLESS STEEL, PASSIVATED.
  2. DETAILED PRODUCT, MECHANICAL, AND ELECTRICAL INFORMATION IS AVAILABLE IN THE LATEST HIGH DENSITY D-SUB PRODUCT PUBLICATION. VISIT [CONNECTPOSITRONIC.COM/PRODUCTS/59/HIGHDENSITY-SUBMINIATURE-OR-CONNECTPOSITRONIC.COM](http://CONNECTPOSITRONIC.COM/PRODUCTS/59/HIGHDENSITY-SUBMINIATURE-OR-CONNECTPOSITRONIC.COM).
  3. DIMENSIONS ARE IN INCHES [MILLIMETERS].



**POSITRONIC INDUSTRIES INC.**  
www.connectpositronic.com

DECIMAL TOL.  
± 0.015 [0.38]

DD SERIES

SCALE  
N.T.S.  
DRAWN BY  
B SHELLBOY

TITLE  
DD44M20Z0S

APPROVED BY  
COLF

ANGULAR TOL.  
± 5°

DATE  
5-18-12

DRAWING NUMBER  
SK14097

REV.  
NC