


POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE. THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION. POSITRONIC INDUSTRIES ASSUMES NO LIABILITY OR RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

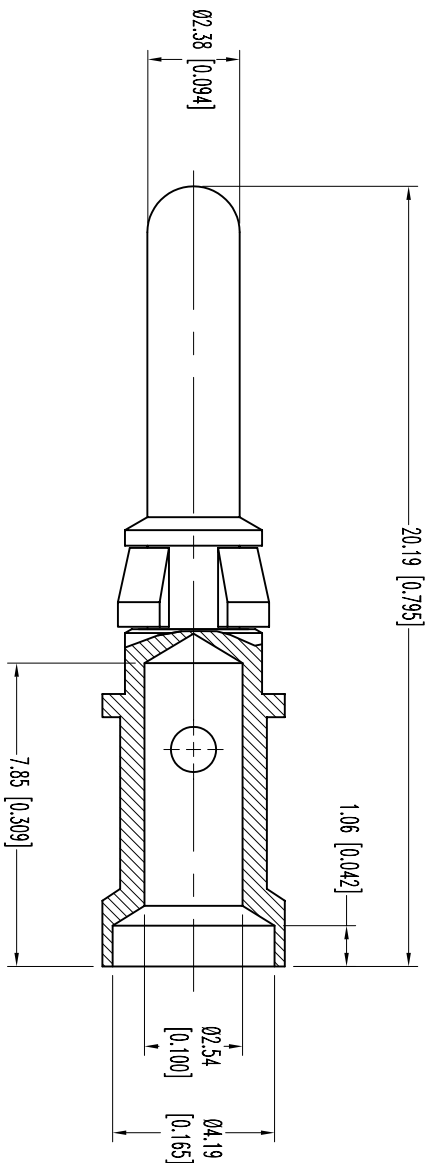

- NOTES:
1. MATERIALS AND FINISHES:
CONTACT: HIGH CONDUCTIVITY COPPER ALLOY WITH GOLD FLASH OVER NICKEL.
RETENTION CLIP: BERYLLIUM COPPER WITH GOLD FLASH OVER NICKEL.
 2. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 40 AMPERES CONTINUOUS.
 3. WORKING TEMPERATURE: -55°C TO +125°C.
 4. CONTACTS ARE ROHS COMPLIANT PER ROHS DIRECTIVE 2002/95/EC OF 27 JAN 2003.
 5. DIMENSIONS ARE IN MILLIMETERS [INCHES].

	
POSITRONIC INDUSTRIES INC. www.connectpositronic.com	
DATE 9-7-05	DRAWING NUMBER SK6539
TITLE MC612N/AA	
PCS SERIES	SCALE N.T.S.
DECIMAL TOL. ± 0.38 [0.015]	DRAWN BY YK
ANGULAR TOL. ± 5°	APPROVED BY
REV. NC	

DATE/REV	REVISION RECORD	APP	DR	CK
9-7-05	NC	ECO 24604	YK	

SK6539