



Series
EPXB

C3 ENVIRONMENTAL INSERT - POLARIZATION A
3 CAVITIES FOR SIZE 5 SOCKET COAX/TWINAX CONTACTS



Issue:
Jun. 17, 2019

Page
1/1

MATING FACE

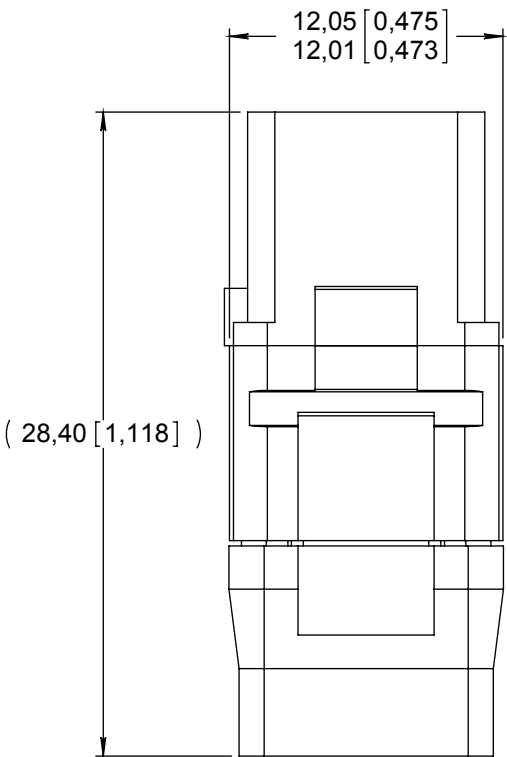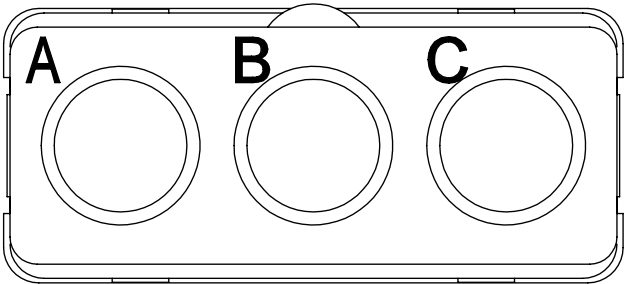


DATE CODE

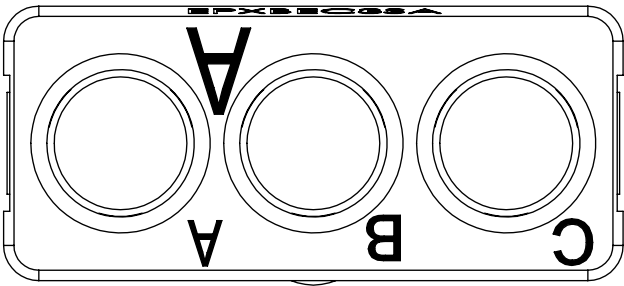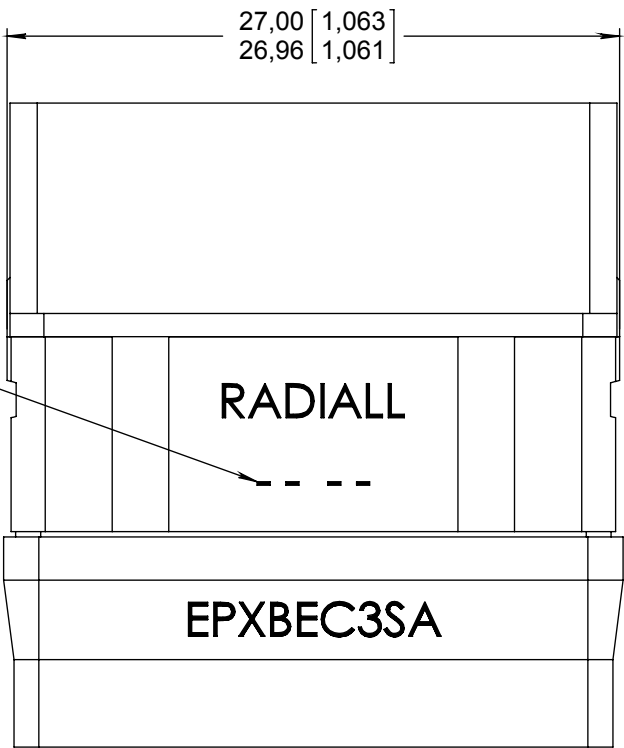

MATERIALS:
INSERT: THERMOSETTING FIBERGLASS FILLED PER ASTM D 5948, WITH METALLIC RETENTION CLIPS PER ASTM-B-194
REAR GROMMET: FLUOROSILICONE ELASTOMER, PER SAE AMS-R-25988

TEMPERATURE RANGE:
OPERATING FROM: -65°C to +175°C (-85°F to +347°F)

DIMENSIONS : mm (inch are given for information only)



Estimated weight : 9,5 g

CREATION				
PEN: M970400041A				
NOM: ARNAULT				
DATE: Feb. 22, 1999	Jun. 17, 19	Added estimated weight	Lopez C.	Weihs H.
	Apr. 16, 07	0,475 was 0,474	MALTY	M.Pessard
APPR.: VERNEAU	Issue	Revisions	Name	Approved

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311