

# COAXIAL TERMINATIONS

## BNC

1 WATT

| Part Number | Power    |          | Frequency range (GHz) | V.S.W.R. (MAX) |       |       |       |      |      | Impedance ( $\Omega$ ) | Type | Obs. |
|-------------|----------|----------|-----------------------|----------------|-------|-------|-------|------|------|------------------------|------|------|
|             | avg. (W) | peak (W) |                       | DC-0.5         | 0.5-1 | 1-2.5 | 2.5-4 | 4-8  | 8-11 |                        |      |      |
| R404010000  | 1        | 500      | DC-1                  |                |       |       |       |      |      |                        | M    | 1    |
| R404010120  | 1        | 500      | DC-1                  |                |       |       |       |      |      |                        | M    | 1-3  |
| R404011000  | 1        | 500      | DC-1                  | 1.08           | 1.15  |       |       |      |      | 50 $\pm$ 2%            | M    |      |
| R404011120  | 1        | 500      | DC-1                  | 1.08           | 1.15  |       |       |      |      | 50 $\pm$ 2%            | M    | 3    |
| R404011121  | 1        | 500      | DC-1                  | 1.08           | 1.15  |       |       |      |      | 50 $\pm$ 2%            | M    | 4    |
| R404011161  | 1        | 500      | DC-1                  | 1.08           | 1.15  |       |       |      |      | 50 $\pm$ 2%            | M    | 6    |
| R404012000  | 1        | 500      | DC-1                  | 1.08           | 1.15  |       |       |      |      | 75 $\pm$ 2%            | M    | 2    |
| R404012120  | 1        | 500      | DC-1                  | 1.08           | 1.15  |       |       |      |      | 75 $\pm$ 2%            | M    | 2-3  |
| R404013000  | 1        | 500      | DC-1                  | 1.08           | 1.15  |       |       |      |      | 50 $\pm$ 2%            | F    |      |
| R404013120  | 1        | 500      | DC-1                  | 1.08           | 1.15  |       |       |      |      | 50 $\pm$ 2%            | F    | 3    |
| R404014000  | 1        | 500      | DC-1                  | 1.08           | 1.15  |       |       |      |      | 75 $\pm$ 2%            | F    | 2    |
| R404014120  | 1        | 500      | DC-1                  | 1.08           | 1.15  |       |       |      |      | 75 $\pm$ 2%            | F    | 2-3  |
| R404111000  | 1        | 500      | DC-2.5                | 1.08           |       | 1.20  |       |      |      | 50 $\pm$ 2%            | M    |      |
| R404111120  | 1        | 500      | DC-2.5                | 1.08           |       | 1.20  |       |      |      | 50 $\pm$ 2%            | M    | 3    |
| R404112000  | 1        | 500      | DC-2.5                | 1.08           |       | 1.20  |       |      |      | 50 $\pm$ 2%            | F    |      |
| R404112120  | 1        | 500      | DC-2.5                | 1.08           |       | 1.20  |       |      |      | 50 $\pm$ 2%            | F    | 3    |
| R404110000  | 1        | 500      | DC-8                  |                | 1.10  |       | 1.20  | 1.25 |      | 50 $\pm$ 5%            | M    | 5    |
| R404110120  | 1        | 500      | DC-8                  |                | 1.10  |       | 1.20  | 1.25 |      | 50 $\pm$ 5%            | M    | 3-5  |
| R404220000  | 1        | 500      | DC-11                 |                | 1.10  |       |       | 1.25 |      | 50 $\pm$ 5%            | M    |      |
| R404220120  | 1        | 500      | DC-11                 |                | 1.10  |       |       | 1.25 |      | 50 $\pm$ 5%            | M    | 3    |

OBS : 1) Special values of DC resistances: To be specified on order



2) 75 Ohms Connector

3) With 2.75" (70 mm) Bead Chain

4) With 2.75" (70 mm) Cord

5) VSWR < 1.10 up to 2 GHz

6) Model with earthing connection designed for used on ETHERNET systems

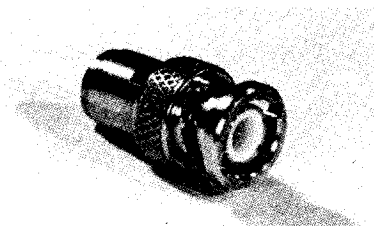

| Part Number | A inch (mm) | B inch (mm) | Weight (g) |
|-------------|-------------|-------------|------------|
| R404010000  | 1.22" (31)  | .57" (14.5) | 15         |
| R404010120  |             |             | 20         |
| R404011000  |             |             | 15         |
| R404011120  |             |             | 20         |
| R404011161  |             |             | 18         |
| R404011121  |             |             | 15         |
| R404012000  |             |             |            |
| R404012120  |             |             | 20         |
| R404013000  | 1.14" (29)  | .43" (11.0) | 15         |
| R404013120  | 1.30" (33)  |             | 20         |

| Part Number | A inch (mm) | B inch (mm) | Weight (g) |
|-------------|-------------|-------------|------------|
| R404014000  | 1.14" (29)  | .43" (11.0) | 15         |
| R404014120  |             |             | 20         |
| R404110000  | 1.30" (33)  | .57" (14.5) | 15         |
| R404110120  |             |             | 20         |
| R404111000  | 1.06" (27)  |             | 15         |
| R404111120  | 1.22" (31)  |             | 20         |
| R404112000  | 1.14" (29)  | .43" (11.0) | 15         |
| R404112120  |             |             | 20         |
| R404220000  | 1.30" (33)  | .57" (14.5) | 15         |
| R404220120  |             |             | 20         |