
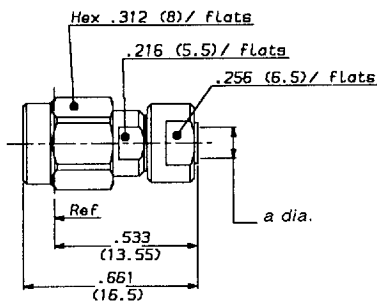


# SMA 2.9

## FOR SEMI RIGID CABLE, SOLDER TYPE



### Straight Plug



|             |               |               |
|-------------|---------------|---------------|
| CABLE       | .085"         | .116"         |
| PART NUMBER | R 127 052 001 | R 127 055 001 |
| a dia.      | .087(2.2)     | .118(3.0)     |

Mounting instructions on page 23

### Straight Jack

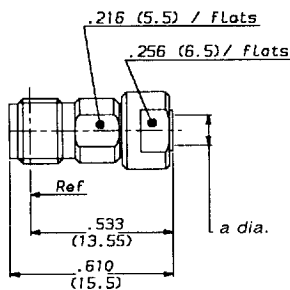
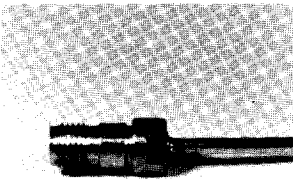


|             |               |               |
|-------------|---------------|---------------|
| CABLE       | .085"         | .116"         |
| PART NUMBER | R 127 222 001 | R 127 225 001 |
| a dia.      | .087(2.2)     | .118(3.0)     |

Mounting instructions on page 23

## HERMETIC MICROSTRIP LAUNCHERS

### Field Replaceable Panel Feedthrough Jack Receptacle

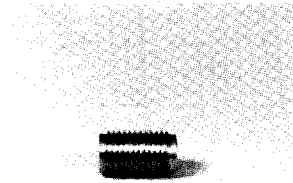



Glass seal



| DESCRIPTION     | PART NUMBER   |
|-----------------|---------------|
| Connector only  | R 127 601 001 |
| Glass seal only | R 280 760     |

Mounting instructions and recommended mounting hole detail on pages 24 & 25  
Glass seal detail on page 14

### Field Replaceable Panel Feedthrough Plug Receptacle

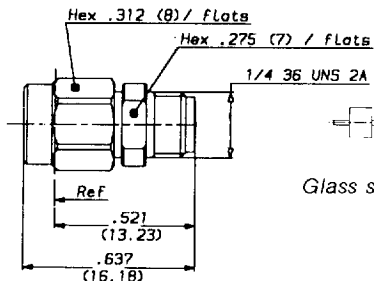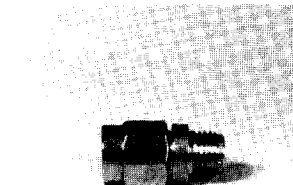

Glass seal



| DESCRIPTION     | PART NUMBER   |
|-----------------|---------------|
| Connector only  | R 127 638 001 |
| Glass seal only | R 280 760     |

Mounting instructions and recommended mounting hole detail on pages 24 & 25  
Glass seal detail on page 14