
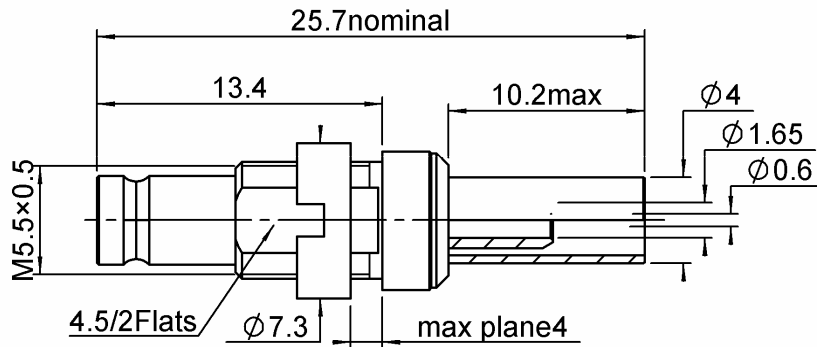

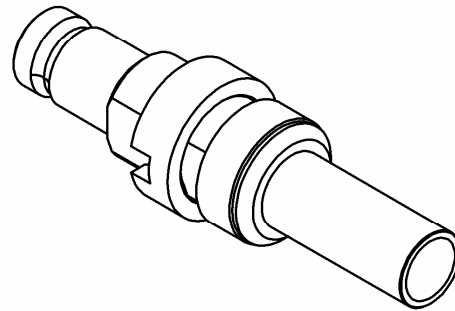


STRAIGHT BULKHEAD JACK
FOR CABLE 2.6/50+75
R118A.311.215


Series : ECO DIN1.0/2.3


PANEL CUT OUT


	mm	
	Maxi	mini
A	5.7	5.6
B	4.65	4.55



All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (µm)
BODY	BRASS	GOLD
CENTER CONTACT	BERYLLIUM COPPER	GOLD
OUTER CONTACT		
INSULATOR	PTFE	
GASKET		
OTHERS PARTS	BRASS	NICKEL
-	-	-
-	-	-

Issue : 0917 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIAL

STRAIGHT BULKHEAD JACK**R118A.311.215****FOR CABLE 2.6/50+75**

Series : ECO DIN1.0/2.3

PACKAGING

Standard	Unit	Other
100	'W' option	Contact us

SPECIFICATION**ELECTRICAL CHARACTERISTICS**

Impedance	50	Ω
Frequency	0-4	GHz
VSWR	1.35* + 0.0000	x F(GHz) Maxi
Insertion loss	NA	$\sqrt{F}(\text{GHz})$ dB Maxi
RF leakage	- (NA)	- F(GHz)) dB Maxi
Voltage rating	750	Veff Maxi
Dielectric withstanding voltage	NA	Veff mini
Insulation resistance	5000	M Ω mini

CABLE ASSEMBLY

Stripping	a	b	c	d	e	f
mm	3.00	6.50	12.5	0.00	9.50	0.00

Assembly instruction :

Crimp 01

Recommended cable(s)

RG 188

RG 316

KX 22A

Characteristics indicated on this data sheet are those that can be achieved with the highest performance cable. Intrinsic limitations of the cable may diminish the performance of the assembly

Cable retention

- pull off

NA N mini

- torque

NA N.cm**MECHANICAL CHARACTERISTICS**

Center contact retention	
Axial force – Mating end	10 N mini
Axial force – Opposite end	NA N mini
Torque	NA N.cm mini

Recommended torque

Mating	NA N.cm
Panel nut	NA N.cm
Clamp nut	NA N.cm
A/F clamp nut	0.0000 mm

Mating life	100 Cycles mini
Weight	3.0000 g

TOOLING

Part Number	Description	Hexagon
.	.	.
R282.293.000	CRIMPING TOOL M22520/5-01	
R282.211.000	CRIMPING TOOL	3.25
R282.235.003	CRIMPING DIES M22520/5-03	3.25

ENVIRONMENTAL

Operating temperature	-40/+85 ° C
Hermetic seal	NA Atm.cm3/s
Panel leakage	NA

OTHER CHARACTERISTICS* : 75 Ω (0-1GHz)

Issue : 0917 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

