

RADIAL


R404441121

TECHNICAL DATA SHEET

TITLE: 1 W 1GHz BNC/m COAXIAL TERMINATION

LTR. C

DRAWING

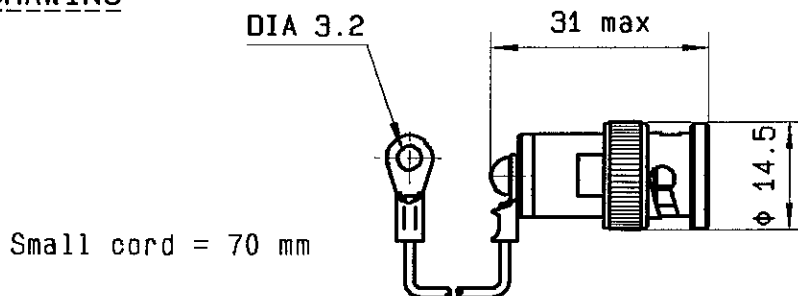

Without marking

General tolerances: +/- 0.5 mm

ELECTRICAL CHARACTERISTICS

FREQUENCY RANGE	: DC ~ 1GHz
IMPEDANCE	: 50 Ohms
DC RESISTANCE	: 50 Ohms $\pm$ 1 %
AVERAGE POWER HANDLING	: 1 W at 25°C
PEAK POWER HANDLING	: 500 W (1 μ s, 1%.) at 25°C


MECHANICAL CHARACTERISTICS

CONNECTOR	: BNC male per MIL C 39012
MAXIMUM WEIGHT	: 20 grams

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C)	: -55 , +125
STORAGE TEMPERATURE RANGE (°C)	: -55 , +125

Power derating
Versus temperature

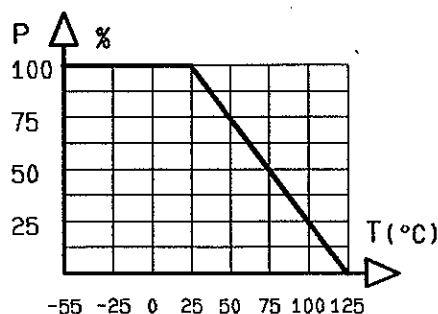

Tentative data subject to change without notice

PEN 89220	QUALITY Dpt App. MO B				
			C	new format	20.10.92 VE
			B	New design	06.08.91 KL
PAGE 1 / 1	DATE 03.07.90	NAME KL	LTR	REVISIONS	DATE APP.
RADIAL 101. Ph. Hoffmann - Z.I West - 93116 ROSNY/S/BOIS Cedex - FRANCE - Phone (33)(1) 49 35 35 35 - Twx 335220F					