


PAGE 1/1	ISSUE 03-06-13	SERIES LC	PART NUMBER F727152500
----------	----------------	-----------	------------------------

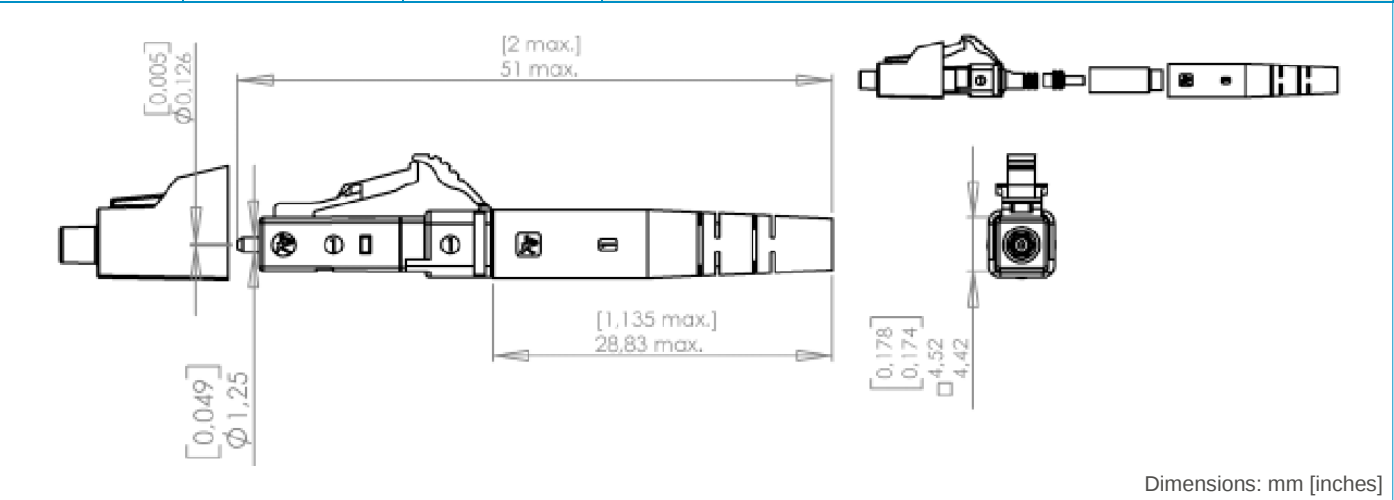

GENERAL

- Type:** IEC 61754-20 (LC)
Singlemode Zirconia ferrule
RJ -45 latching connector system
- Ferrule inner diameter:** Ø126µm
- Fiber size :** 9/125µm Singlemode
- Cable size & type:** Ø2mm Simplex
- Termination:** Refer to 503.08.500 assembly instruction manual
- Color:** GREEN

CHARACTERISTICS (Dependent on cable or fiber construction)

- Optical:**
- Attenuation at 1300 nm and 1550 nm
 - Insertion loss (IEC 61300-3-4 method B): ≤0.15dB Mean
≤0.10dB Stand.dev
 - Attenuation of random mated connectors (IEC 61300-3-34): ≤0.15 dB Mean
≤0.12dB Stand.dev
 - Return-Loss: (IEC 61300-3-6): >60dB APC
- Mechanical:**
- Vibration tests: 10 to 55 Hz , 1,5 mm (peak to peak), 2 Hr/axis
 - Impact test: 1,5 m drop, 8 cycles
 - Endurance: 200 matings
 - Cable retention: 68N
- Environmental:**
- Storage temperature range: -40°C / +85°C
 - Operating temperature range: -40°C / +70°C
 - Thermal cycle test: -40°C to +75°C , 21 Cycles , 168
 - Humidity / Condensation cycling test: 95% RH , -10°C / +65°C , 14 cycles , 168 Hr

(Performance and specification: see document GEN_F727 001)