


PAGE 1/1	ISSUE 03-06-13	SERIES LC	PART NUMBER F727503700
----------	----------------	-----------	-------------------------------

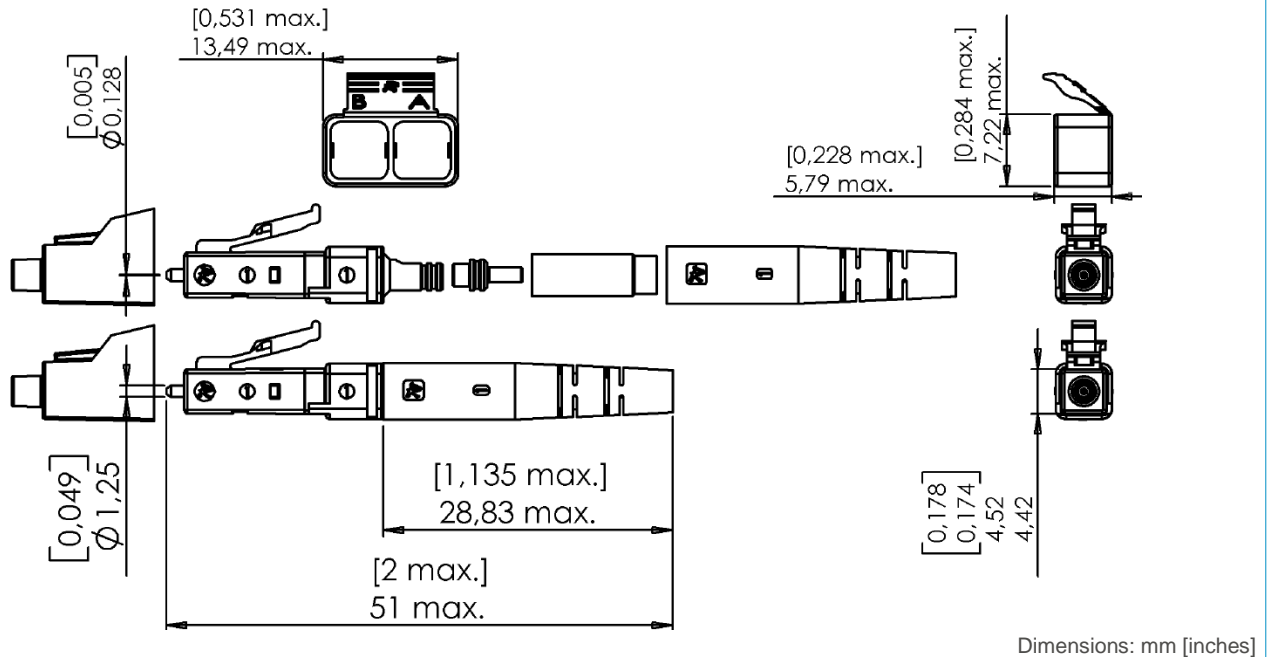

Dimensions: mm [inches]

GENERAL

Type: IEC 61754-20 (LC)
Multimode Zirconia ferrule
RJ-45 latching connector system

Ferrule inner diameter: Ø128µm

Fiber size: 62.5/125µm Multimode

Cable size & type: Ø2.8 ou 3mm Duplex

Termination: Refer to 503.08.500 assembly instruction manual

Color: BEIGE

CHARACTERISTICS (Dependent on cable or fiber construction)

Optical:

- Attenuation at 850 nm and 1300 nm
- Insertion loss (IEC 61300-3-4 method B): ≤0.10dB mean
≤0.05dB Stand.dev
- Attenuation of random mated connectors (IEC 61300-3-34): ≤0.10dB mean
≤0.07dB Stand.dev

Return-Loss: (IEC 61300-3-6): >20dB PC

Mechanical:

- Vibration tests: 10 to 55 Hz , 1,5 mm (peak to peak), 2 Hr/axis
- Impact test: 1,5 m drop, 8 cycles
- Endurance: 200 matings

Cable retention: 68N

Environmental:

- Storage temperature range: -40°C / +85°C
- Operating temperature range: -40°C / +85°C
- Thermal cycle test: -40°C / +75°C , 21 Cycles , 168
- Humidity / Condensation cycling test: 95% RH , -10°C / +65°C , 14 cycles , 168 Hr

(Performance and specification: see document **GEN_F727 001**)