

GreenPAK Ultra-small Programmable Mixed-signal Matrix


Features

- Logic and Mixed-Signal Circuits
- Highly Versatile Macrocells
- 1.8 V ($\pm 5\%$) to 5 V ($\pm 10\%$) Supply
- Operating Temperature Range: $-40\text{ }^{\circ}\text{C}$ to $85\text{ }^{\circ}\text{C}$
- RoHS Compliant/Halogen-Free
- Pb-Free 8-pin STQFN: 1.0 x 1.2 x 0.55 mm, 0.4 mm pitch

Applications

- Personal Computers and Servers
- PC Peripherals
- Consumer Electronics
- Data Communications Equipment
- Handheld and Portable Electronics

Pin Configuration

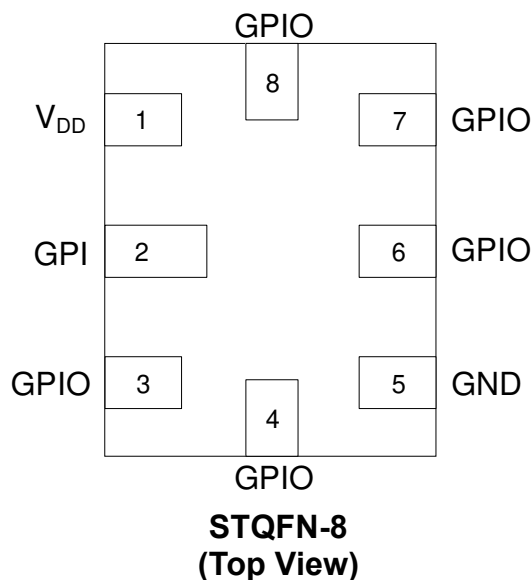

Block Diagram

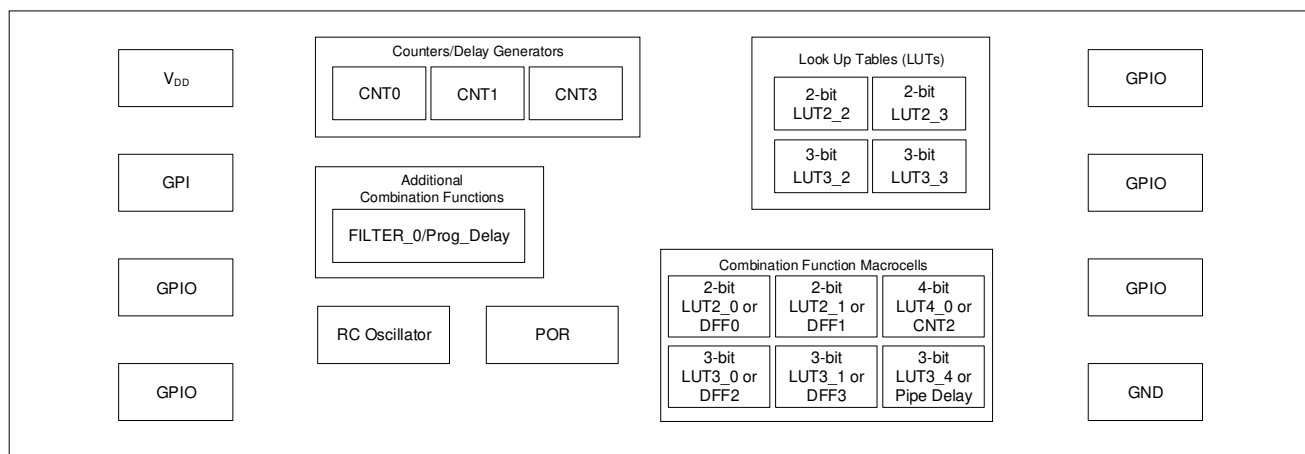


Figure 1. Block Diagram

1.0 Overview

The SLG46108 provides a small, low power component for commonly used mixed-signal functions. The user creates their circuit design by programming the one time Non-Volatile Memory (NVM) to configure the interconnect logic, the IO (Input/Output) pins, and the macrocells of the SLG46108. This highly versatile device allows a wide variety of mixed-signal functions to be designed within a very small, low power single integrated circuit. The macrocells in the device include the following:

- Four Combinatorial Look Up Tables (LUTs)
 - Two 2-bit LUTs
 - Two 3-bit LUTs
- Seven Combination Function Macrocell
 - Two Selectable D Flip-Flop/Latches (DFF) or 2-bit LUTs
 - Two Selectable D Flip-Flop/Latches (DFF) or 3-bit LUTs
 - One Selectable Pipe Delay or 3-bit LUT
 - Pipe Delay – 8 stage/2 output
 - One Selectable Counter/Delay (CNT/DLY) or 4-bit LUT
 - One Programmable Delay/Deglitch Filter
- Three 8-bit Counter/Delay Generators (CNT/DLY) with external clock/reset
- RC Oscillator (RC OSC)
- Power-On Reset (POR)

2.0 Pin Description

2.1 Functional Pin Description

Pin #	Pin Name	Function
1	V _{DD}	Power Supply
2	GPI	General Purpose Input
3	GPIO	General Purpose IO
4	GPIO	General Purpose IO
5	GND	GND
6	GPIO	General Purpose IO
7	GPIO	General Purpose IO
8	GPIO	General Purpose IO

3.0 User Programmability

Non-volatile memory (NVM) is used to configure the SLG46108's connection matrix routing and macrocells. The NVM is one time programmable (OTP). However, GreenPAK development tools can be used to configure the connection matrix and macrocells, without programming the NVM, to allow on-chip emulation. This configuration will remain active on the device as long as it remains powered and can be re-written as needed to facilitate rapid design changes.

When a design is ready for in-circuit testing, the same GreenPAK development tools can be used to program the NVM and create samples for small quantity builds. Once the NVM is programmed, the device will retain this configuration for the duration of its lifetime.

Once the design is finalized, the design file can be forwarded to Renesas Electronics Corporation to integrate into the production process.

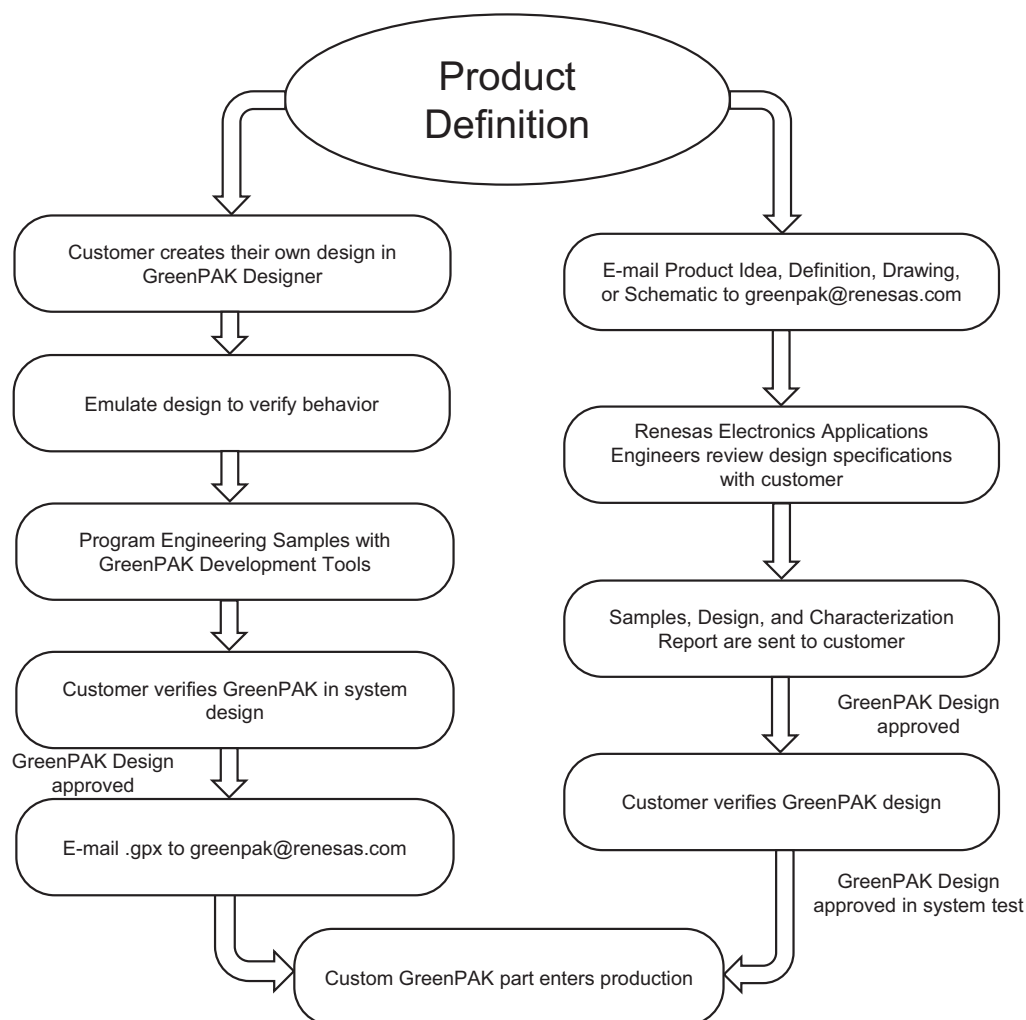


Figure 2. Steps to Create a Custom GreenPAK Device

4.0 Ordering Information

Part Number	Type
SLG46108V	8-pin STQFN
SLG46108VTR	8-pin STQFN - Tape and Reel (3k units)

Note 1: Use SLG46108V to order. Shipments are automatically in Tape and Reel.

Note 2: "TR" suffix is no longer used. It is a legacy naming convention shown here only for informational purposes.

5.0 Electrical Specifications

5.1 Absolute Maximum Conditions

Parameter		Min.	Max.	Unit
Supply Voltage on V_{DD} relative to GND		-0.5	7	V
DC Input Voltage		GND - 0.5	$V_{DD} + 0.5$	V
Maximum Average or DC Current (Through pin)	Push-Pull 1x	--	8	mA
	Push-Pull 2x	--	10	
	OD 1x	--	8	
	OD 2x	--	12	
Current at Input Pin		-1.0	1.0	mA
Storage Temperature Range		-65	150	°C
Junction Temperature		--	150	°C
ESD Protection (Human Body Model)		2000	--	V
ESD Protection (Charged Device Model)		1300	--	V
Moisture Sensitivity Level		1		

5.2 Electrical Characteristics (1.8 V $\pm 5\%$ V_{DD})

Symbol	Parameter	Condition/Note	Min.	Typ.	Max.	Unit
V_{DD}	Supply Voltage		1.71	1.80	1.89	V
I_Q	Quiescent Current	Static Inputs and Outputs (when OSC is powered down and non-operational)	--	0.28	--	μ A
T_A	Operating Temperature		-40	25	85	°C
V_{IH}	HIGH-Level Input Voltage	Logic Input	1.071	--	V_{DD}	V
		Logic Input with Schmitt Trigger	1.276	--	V_{DD}	V
		Low-Level Logic Input	0.936	--	V_{DD}	V
V_{IL}	LOW-Level Input Voltage	Logic Input	--	--	0.730	V
		Logic Input with Schmitt Trigger	--	--	0.475	V
		Low-Level Logic Input	--	--	0.517	V
V_{HYS}	Schmitt Trigger Hysteresis Voltage	Logic Input with Schmitt Trigger	0.26	0.47	0.60	V
I_{LKG}	Input leakage (Absolute Value)		--	0.001	1	μ A
V_{OH}	HIGH-Level Output Voltage	Push-Pull 1X, Open-Drain PMOS 1X, $I_{OH} = 100 \mu$ A	1.692	1.788	--	V
		Push-Pull 2X, Open-Drain PMOS 2X, $I_{OH} = 100 \mu$ A	1.700	1.794	--	V
V_{OL}	LOW-Level Output Voltage	Push-Pull 1X, $I_{OL} = 100 \mu$ A	--	0.01	0.016	V
		Push-Pull 2X, $I_{OL} = 100 \mu$ A	--	0.005	0.007	V
		Open-Drain NMOS 1X, $I_{OL} = 100 \mu$ A	--	0.005	0.006	V
		Open-Drain NMOS 2X, $I_{OL} = 100 \mu$ A	--	0.003	0.003	V

Symbol	Parameter	Condition/Note	Min.	Typ.	Max.	Unit
I_{OH}	HIGH-Level Output Current (see Note 1)	Push-Pull 1X, Open-Drain PMOS 1X, $V_{OH} = V_{DD} - 0.2$	1.045	1.506	--	mA
		Push-Pull 2X, Open-Drain PMOS 2X, $V_{OH} = V_{DD} - 0.2$	2.097	2.982	--	mA
I_{OL}	LOW-Level Output Current (see Note 1)	Push-Pull 1X, $V_{OL} = 0.15\text{ V}$	0.984	1.363	--	mA
		Push-Pull 2X, $V_{OL} = 0.15\text{ V}$	2.011	2.743	--	mA
		Open-Drain NMOS 1X, $V_{OL} = 0.15\text{ V}$	2.029	2.763	--	mA
		Open-Drain NMOS 2X, $V_{OL} = 0.15\text{ V}$	4.020	5.471	--	mA
I_{VDD}	Maximum Average or DC Current Through V_{DD} Pin (Per chip side, see Note 2)	$T_J = 85\text{ }^{\circ}\text{C}$	--	--	45	mA
		$T_J = 110\text{ }^{\circ}\text{C}$	--	--	22	mA
I_{GND}	Maximum Average or DC Current Through GND Pin (Per chip side, see Note 2)	$T_J = 85\text{ }^{\circ}\text{C}$	--	--	90	mA
		$T_J = 110\text{ }^{\circ}\text{C}$	--	--	44	mA
V_O	Maximal Voltage Applied to any pin in High Impedance State		--	--	$V_{DD}+0.3$	V
T_{SU}	Startup Time	From V_{DD} rising past PON_{THR}	--	--	0.54	ms
PON_{THR}	Power-On Threshold	V_{DD} Level Required to Start Up the Chip	1.302	1.505	1.707	V
$POFF_{THR}$	Power-Off Threshold	V_{DD} Level Required to Switch Off the Chip	0.681	0.902	1.170	V
R_{PULL}	Pull-Up or Pull-Down Resistance	1 M for Pull-Up: $V_{IN} = GND$; for Pull-Down: $V_{IN} = V_{DD}$	--	1	--	M Ω
		100 k for Pull-Up: $V_{IN} = GND$; for Pull-Down: $V_{IN} = V_{DD}$	--	100	--	k Ω
		10 k for Pull-Up: $V_{IN} = GND$; for Pull-Down: $V_{IN} = V_{DD}$	--	10	--	k Ω
C_{VDD}	Decoupling Capacitor	Capacitor Value at V_{DD}	--	0.1	--	μF

Note 1: DC or average current through any pin should not exceed value given in Absolute Maximum Conditions.

Note 2: The GreenPAK's power rails are divided into two sides. Pins 2, 3, and 4 are connected to one side, pins 6, 7, and 8 to another.

5.3 Electrical Characteristics (3.3 V $\pm 10\%$ V_{DD})

Symbol	Parameter	Condition/Note	Min.	Typ.	Max.	Unit
V _{DD}	Supply Voltage		3.0	3.3	3.6	V
I _Q	Quiescent Current	Static Inputs and Outputs (when OSC is powered down and non-operational)	--	0.52	--	μ A
T _A	Operating Temperature		-40	25	85	°C
V _{IH}	HIGH-Level Input Voltage	Logic Input	1.840	--	V _{DD}	V
		Logic Input with Schmitt Trigger	2.170	--	V _{DD}	V
		Low-Level Logic Input	1.086	--	V _{DD}	V
V _{IL}	LOW-Level Input Voltage	Logic Input	--	--	1.255	V
		Logic Input with Schmitt Trigger	--	--	0.934	V
		Low-Level Logic Input	--	--	0.669	V
V _{HYS}	Schmitt Trigger Hysteresis Voltage	Logic Input with Schmitt Trigger	0.56	0.71	0.86	V
I _{LKG}	Input leakage (Absolute Value)		--	0.001	1	μ A
V _{OH}	HIGH-Level Output Voltage	Push-Pull 1X, Open-Drain PMOS 1X, I _{OH} = 3 mA	2.721	3.108	--	V
		Push-Pull 2X, Open-Drain PMOS 2X, I _{OH} = 3 mA	2.864	3.204	--	V
V _{OL}	LOW-Level Output Voltage	Push-Pull 1X, I _{OL} = 3 mA	--	0.175	0.257	V
		Push-Pull 2X, I _{OL} = 3 mA	--	0.086	0.122	V
		Open-Drain NMOS 1X, I _{OL} = 3 mA	--	0.085	0.121	V
		Open-Drain NMOS 2X, I _{OL} = 3 mA	--	0.043	0.061	V
I _{OH}	HIGH-Level Output Current (see Note 1)	Push-Pull 1X, Open-Drain PMOS 1X, V _{OH} = 2.4 V	5.774	11.066	--	mA
		Push-Pull 2X, Open-Drain PMOS 2X, V _{OH} = 2.4 V	11.351	21.730	--	mA
I _{OL}	LOW-Level Output Current (see Note 1)	Push-Pull 1X, V _{OL} = 0.4 V	4.491	6.438	--	mA
		Push-Pull 2X, V _{OL} = 0.4 V	9.124	12.884	--	mA
		Open-Drain NMOS 1X, V _{OL} = 0.4 V	9.227	12.995	--	mA
		Open-Drain NMOS 2X, V _{OL} = 0.4 V	17.995	25.459	--	mA
I _{VDD}	Maximum Average or DC Current Through V _{DD} Pin (Per chip side, see Note 2)	T _J = 85 °C	--	--	45	mA
		T _J = 110 °C	--	--	22	mA
I _{GND}	Maximum Average or DC Current Through GND Pin (Per chip side, see Note 2)	T _J = 85 °C	--	--	90	mA
		T _J = 110 °C	--	--	44	mA

Symbol	Parameter	Condition/Note	Min.	Typ.	Max.	Unit
V_O	Maximal Voltage Applied to any pin in High Impedance State		--	--	$V_{DD}+0.3$	V
T_{SU}	Startup Time	From V_{DD} rising past PON_{THR}	--	--	0.52	ms
PON_{THR}	Power-On Threshold	V_{DD} Level Required to Start Up the Chip	1.303	1.506	1.707	V
$POFF_{THR}$	Power-Off Threshold	V_{DD} Level Required to Switch Off the Chip	0.718	0.901	1.173	V
R_{PULL}	Pull-Up or Pull-Down Resistance	1 M for Pull-Up: $V_{IN} = GND$; for Pull-Down: $V_{IN} = V_{DD}$	--	1	--	M Ω
		100 k for Pull-Up: $V_{IN} = GND$; for Pull-Down: $V_{IN} = V_{DD}$	--	100	--	k Ω
		10 k for Pull-Up: $V_{IN} = GND$; for Pull-Down: $V_{IN} = V_{DD}$	--	10	--	k Ω
C_{VDD}	Decoupling Capacitor	Capacitor Value at V_{DD}	--	0.1	--	μF
Note 1: DC or average current through any pin should not exceed value given in Absolute Maximum Conditions. Note 2: The GreenPAK's power rails are divided into two sides. Pins 2, 3, and 4 are connected to one side, pins 6, 7, and 8 to another.						

5.4 Electrical Characteristics (5 V $\pm 10\%$ V_{DD})

Symbol	Parameter	Condition/Note	Min.	Typ.	Max.	Unit
V_{DD}	Supply Voltage		4.5	5.0	5.5	V
I_Q	Quiescent Current	Static Inputs and Outputs (when OSC is powered down and non-operational)	--	0.81	--	μA
T_A	Operating Temperature		-40	25	85	$^{\circ}C$
V_{IH}	HIGH-Level Input Voltage	Logic Input	2.744	--	V_{DD}	V
		Logic Input with Schmitt Trigger	3.190	--	V_{DD}	V
		Low-Level Logic Input	1.185	--	V_{DD}	V
V_{IL}	LOW-Level Input Voltage	Logic Input	--	--	1.877	V
		Logic Input with Schmitt Trigger	--	--	1.488	V
		Low-Level Logic Input	--	--	0.765	V
V_{HYS}	Schmitt Trigger Hysteresis Voltage	Logic Input with Schmitt Trigger	0.77	0.94	1.14	V
I_{LKG}	Input leakage (Absolute Value)		--	0.001	1	μA
V_{OH}	HIGH-Level Output Voltage	Push-Pull 1X, Open-Drain PMOS 1X, $I_{OH} = 5\text{ mA}$	4.171	4.761	--	V
		Push-Pull 2X, Open-Drain PMOS 2X, $I_{OH} = 5\text{ mA}$	4.336	4.879	--	V
V_{OL}	LOW-Level Output Voltage	Push-Pull 1X, $I_{OL} = 5\text{ mA}$	--	0.225	0.325	V
		Push-Pull 2X, $I_{OL} = 5\text{ mA}$	--	0.111	0.156	V
		Open-Drain NMOS 1X, $I_{OL} = 5\text{ mA}$	--	0.110	0.155	V
		Open-Drain NMOS 2X, $I_{OL} = 5\text{ mA}$	--	0.057	0.080	V
I_{OH}	HIGH-Level Output Current (see Note 1)	Push-Pull 1X, Open-Drain PMOS 1X, $V_{OH} = 2.4\text{ V}$	20.656	30.203	--	mA
		Push-Pull 2X, Open-Drain PMOS 2X, $V_{OH} = 2.4\text{ V}$	40.170	56.319	--	mA
I_{OL}	LOW-Level Output Current (see Note 1)	Push-Pull 1X, $V_{OL} = 0.4\text{ V}$	6.087	8.611	--	mA
		Push-Pull 2X, $V_{OL} = 0.4\text{ V}$	12.321	17.147	--	mA
		Open-Drain NMOS 1X, $V_{OL} = 0.4\text{ V}$	12.444	17.282	--	mA
		Open-Drain NMOS 2X, $V_{OL} = 0.4\text{ V}$	24.032	33.581	--	mA
I_{VDD}	Maximum Average or DC Current Through V_{DD} Pin (Per chip side, see Note 2)	$T_J = 85\text{ }^{\circ}C$	--	--	45	mA
		$T_J = 110\text{ }^{\circ}C$	--	--	22	mA
I_{GND}	Maximum Average or DC Current Through GND Pin (Per chip side, see Note 2)	$T_J = 85\text{ }^{\circ}C$	--	--	90	mA
		$T_J = 110\text{ }^{\circ}C$	--	--	44	mA

Symbol	Parameter	Condition/Note	Min.	Typ.	Max.	Unit
V_O	Maximal Voltage Applied to any pin in High Impedance State				$V_{DD}+0.3$	V
T_{SU}	Startup Time	From V_{DD} rising past PON_{THR}			0.51	ms
PON_{THR}	Power-On Threshold	V_{DD} Level Required to Start Up the Chip	1.303	1.506	1.707	V
$POFF_{THR}$	Power-Off Threshold	V_{DD} Level Required to Switch Off the Chip	0.675	0.901	1.174	V
R_{PULL}	Pull-Up or Pull-Down Resistance	1 M for Pull-Up: $V_{IN} = GND$; for Pull-Down: $V_{IN} = V_{DD}$	--	1	--	M Ω
		100 k for Pull-Up: $V_{IN} = GND$; for Pull-Down: $V_{IN} = V_{DD}$	--	100	--	k Ω
		10 k for Pull-Up: $V_{IN} = GND$; for Pull-Down: $V_{IN} = V_{DD}$	--	10	--	k Ω
C_{VDD}	Decoupling Capacitor	Capacitor Value at V_{DD}	--	0.1	--	μF
Note 1: DC or average current through any pin should not exceed value given in Absolute Maximum Conditions. Note 2: The GreenPAK's power rails are divided into two sides. Pins 2, 3, and 4 are connected to one side, pins 6, 7, and 8 to another.						

5.5 IDD Estimator

Table 1. Typical Current Estimated for Each Macrocell

Symbol	Parameter	Note	V _{DD} = 1.8 V	V _{DD} = 3.3 V	V _{DD} = 5.0 V	Unit
I	Current	Chip Quiescent	0.27	0.51	0.79	μA
		OSC 2 MHz, pre-divider = 1, divider = 1	21.86	32.18	45.29	μA
		OSC 2 MHz, pre-divider = 1, divider = 8	21.77	31.96	44.88	μA
		OSC 2 MHz, pre-divider = 1, divider = 64	21.70	31.82	44.70	μA
		OSC 2 MHz, pre-divider = 2, divider = 1	18.97	26.19	35.69	μA
		OSC 2 MHz, pre-divider = 2, divider = 8	18.92	26.07	35.49	μA
		OSC 2 MHz, pre-divider = 2, divider = 64	18.89	26.01	35.40	μA
		OSC 2 MHz, pre-divider = 4, divider = 1	17.53	23.21	30.93	μA
		OSC 2 MHz, pre-divider = 4, divider = 8	17.51	23.16	30.83	μA
		OSC 2 MHz, pre-divider = 4, divider = 64	17.49	23.12	30.78	μA
		OSC 2 MHz, pre-divider = 8, divider = 1	16.81	21.70	28.51	μA
		OSC 2 MHz, pre-divider = 8, divider = 8	16.80	21.67	28.46	μA
		OSC 2 MHz, pre-divider = 8, divider = 64	16.79	21.65	28.43	μA
		OSC 25 kHz, pre-divider = 1, divider = 1, 8, 64	5.16	5.71	6.73	μA
		OSC 25 kHz, pre-divider = 2, divider = 1, 8, 64	5.13	5.65	6.63	μA
		OSC 25 kHz, pre-divider = 4, divider = 1, 8, 64	5.11	5.62	6.57	μA
		OSC 25 kHz, pre-divider = 8, divider = 1, 8, 64	5.10	5.60	6.54	μA

5.6 Timing Estimator

Table 2. Typical Delay Estimated for Each Macrocell

Symbol	Parameter	Note	V _{DD} = 1.8 V		V _{DD} = 3.3 V		V _{DD} = 5.0 V		Unit
			rising	falling	rising	falling	rising	falling	
tpd	Delay	Digital Input to PP 1X	33.4	36.4	13.6	15.0	9.8	10.6	ns
tpd	Delay	Digital Input to PP 2X	31.1	34.1	12.8	14.1	9.3	10.1	ns
tpd	Delay	Digital Input with Schmitt Trigger to PP 1X	33.4	35.7	13.8	15.2	10.0	11.0	ns
tpd	Delay	Low Voltage Digital Input - to PP 1X (V _{ih} = min)	214.1	623.0	216.8	184.6	105.0	120.0	ns
tpd	Delay	Digital Input without Schmitt Trigger -- 1x NMOS	--	79.4	--	28.0	--	18.0	ns
tpd	Delay	Digital Input without Schmitt Trigger -- 1x PMOS	33.8	--	13.8	--	10.0	--	ns
tpd	Delay	Digital Input without Schmitt Trigger -- 2x NMOS	--	71.3	--	25.1	--	16.1	ns
tpd	Delay	Digital Input without Schmitt Trigger -- 2x PMOS	31.4	--	12.9	--	9.4	--	ns
tpd	Delay	Output enable from pin, OE Hi-Z to 1	33.5	--	13.7	--	9.9	--	ns
tpd	Delay	Output enable from pin, OE Hi-Z to 0	--	36.3	--	15.0	--	10.9	ns
tpd	Delay	2-bit LUT (Latch shared macrocell inputs)	24.5	22.3	10.8	9.5	8.0	7.0	ns
tpd	Delay	Latch (2-bit LUT shared macrocell inputs)	25.8	24.8	11.3	10.5	8.4	7.6	ns
tpd	Delay	3-bit LUT (LATCH shared macrocell inputs)	29.5	26.0	12.7	10.9	9.3	8.0	ns

Table 2. Typical Delay Estimated for Each Macrocell (continued)

Symbol	Parameter	Note	V _{DD} = 1.8 V		V _{DD} = 3.3 V		V _{DD} = 5.0 V		Unit
			rising	falling	rising	falling	rising	falling	
tpd	Delay	Latch with nRST/nSET (3-bit LUT shared macrocell inputs)	30.1	34.6	13.2	14.7	9.7	10.6	ns
tpd	Delay	4-bit LUT (shared macrocell inputs)	28.3	25.7	12.3	10.6	9.0	7.7	ns
tpd	Delay	2-bit LUT	17.5	19.4	7.8	8.1	5.9	5.9	ns
tpd	Delay	3-bit LUT	21.7	24.2	9.4	9.8	7.1	7.1	ns
tpd	Delay	CNT/DLY Logic	50.6	42.5	22.0	18.6	15.5	13.3	ns
tpd	Delay	CNT/DLY (shared macrocell inputs)	54.2	46.3	23.4	20.1	16.5	14.3	ns
tpd	Delay	CNT3/DLY3 Rising Edge Detect (shared macrocell inputs)	108.9	--	49.2	--	34.0	--	ns
tpd	Delay	CNT3/DLY3 Falling Edge Detect (shared macrocell inputs)	--	108.1	--	48.9	--	33.9	ns
tpd	Delay	CNT3/DLY3 Both Edge Detect (shared macrocell inputs)	108.4	108.2	49.0	48.9	34.0	33.9	ns
tw	Pulse Width	CNT3/DLY3 Rising Edge Detect (shared macrocell inputs)	49.7	--	21.7	--	15.8	--	ns
tw	Pulse Width	CNT3/DLY3 Falling Edge Detect (shared macrocell inputs)	--	49.1	--	21.2	--	15.5	ns
tw	Pulse Width	CNT3/DLY3 Both Edge Detect (shared macrocell inputs)	47.7	47.1	20.8	20.3	15.2	14.9	ns
tpd	Delay	DFF	29.6	22.1	12.9	9.7	9.5	7.3	ns
tpd	Delay	DFF nReset	--	28.9	--	12.3	--	9.0	ns
tpd	Delay	DFF nSet	--	35.1	--	14.8	--	10.7	ns
tpd	Delay	Filter	183.7	196.7	75.4	78.4	49.5	52.2	ns
tpd	Delay	PDLY 1 Cell Both Edge Delay	352.0	346.5	160.6	157.9	119.2	117.3	ns
tpd	Delay	PDLY 1 Cell Both Edge Detect	39.1	37.7	16.9	16.1	12.2	11.7	ns
tpd	Delay	PDLY 1 Cell Rising Edge Detect	39.1	--	16.9	--	12.2	--	ns
tpd	Delay	PDLY 1 Cell Falling Edge Detect	--	37.7	--	16.1	--	11.7	ns
tpd	Delay	PDLY 2 Cells Both Edge Delay	657.4	653.0	313.2	310.8	224.2	222.5	ns
tpd	Delay	PDLY 2 Cells Both Edge Detect	39.1	37.7	16.9	16.1	12.2	11.7	ns
tpd	Delay	PDLY 2 Cells Rising Edge Detect	39.0	--	16.9	--	12.2	--	ns
tpd	Delay	PDLY 2 Cells Falling Edge Detect	--	37.8	--	16.1	--	11.7	ns
tpd	Delay	PDLY 3 Cells Both Edge Delay	965.1	959.0	460.1	457.0	329.5	324.4	ns
tpd	Delay	PDLY 3 Cells Both Edge Detect	39.1	37.7	16.9	16.1	12.2	11.7	ns
tpd	Delay	PDLY 3 Cells Rising Edge Detect	39.0	--	16.9	--	12.2	--	ns
tpd	Delay	PDLY 3 Cells Falling Edge Detect	--	37.8	--	16.1	--	11.7	ns
tpd	Delay	PDLY 4 Cells Both Edge Delay	1271.5	1266.1	606.9	604.0	434.9	432.8	ns
tpd	Delay	PDLY 4 Cells Both Edge Detect	39.1	37.7	16.9	16.1	12.2	11.7	ns
tpd	Delay	PDLY 4 Cells Rising Edge Detect	39.0	--	16.9	--	12.2	--	ns
tpd	Delay	PDLY 4 Cells Falling Edge Detect	--	37.8	--	16.1	--	11.7	ns

5.7 Typical Counter/Delay Offset Measurements

Table 3. Typical Counter/Delay Offset Measurements

Parameter	RC OSC Freq	RC OSC Power	V _{DD} = 1.8 V	V _{DD} = 3.3 V	V _{DD} = 5.0 V	Unit
offset	25 kHz	auto	19	14	12	μs
offset	2 MHz	auto	7	4	4	μs
frequency settling time	25 kHz	auto	19	14	12	μs
frequency settling time	2 MHz	auto	14	14	14	μs
variable (CLK period)	25 kHz	forced	0-40	0-40	0-40	μs
variable (CLK period)	2 MHz	forced	0-0.5	0-0.5	0-0.5	μs
tpd (non-delayed edge)	25 kHz/ 2 MHz	either	35	14	10	ns

5.8 Expected Delays and Widths

Table 4. Expected Delays and Widths (Typical)

Symbol	Parameter	Note	V _{DD} = 1.8 V	V _{DD} = 3.3 V	V _{DD} = 5.0 V	Unit
Width	Width, 1 cell	mode:(any)edge detect, edge detect output	305	140	105	ns
Width	Width, 2 cell	mode:(any)edge detect, edge detect output	611	281	210	ns
Width	Width, 3 cell	mode:(any)edge detect, edge detect output	918	423	315	ns
Width	Width, 4 cell	mode:(any)edge detect, edge detect output	1225	564	420	ns
time1	Delay, 1 cell	mode:(any)edge detect, edge detect output	39	17	12	ns
time1	Delay, 2 cell	mode:(any)edge detect, edge detect output	39	17	12	ns
time1	Delay, 3 cell	mode:(any)edge detect, edge detect output	39	17	12	ns
time1	Delay, 4 cell	mode:(any)edge detect, edge detect output	39	17	12	ns
time2	Delay, 1 cell	mode: both edge delay, edge detect output	344	157	117	ns
time2	Delay, 2 cell	mode: both edge delay, edge detect output	650	298	222	ns
time2	Delay, 3 cell	mode: both edge delay, edge detect output	957	440	327	ns
time2	Delay, 4 cell	mode: both edge delay, edge detect output	1264	581	432	ns

5.9 Typical Pulse Width Performance

Table 5. Typical Pulse Width Performance .

Parameter	V _{DD} = 1.8 V	V _{DD} = 3.3 V	V _{DD} = 5.0 V	Unit
Filtered Pulse Width	< 150	< 55	< 35	ns

5.10 OSC Specifications

5.10.1 25 kHz RC Oscillator

Table 6. 25 kHz RC OSC Frequency Limits

Power Supply Range (V _{DD}), V	Temperature Range					
	+25 °C		0 °C ... +85 °C		-40 °C ... +85 °C	
	Min., kHz	Max., kHz	Min., kHz	Max., kHz	Min., kHz	Max., kHz
1.8 V ±5 %	24.442	25.552	23.613	26.037	23.190	26.916
3.3 V ±10 %	24.453	25.542	23.566	26.044	23.194	26.945
5 V ±10 %	24.207	26.109	23.417	26.220	23.086	26.907
2.5 V - 4.5 V	24.320	25.606	23.487	26.093	23.194	26.998
1.71 V - 5.5 V	23.855	26.484	23.257	26.484	23.180	27.048

Table 7. 25 kHz RC OSC Frequency Error (Error Calculated Relative to Nominal Value)

Power Supply Range (V _{DD}), V	Temperature Range					
	+25 °C		0 °C ... +85 °C		-40 °C ... +85 °C	
	Error (% at Minimum)	Error (% at Maximum)	Error (% at Minimum)	Error (% at Maximum)	Error (% at Minimum)	Error (% at Maximum)
1.8 V ±5 %	-2.23 %	2.21 %	-5.55 %	4.15 %	-7.24 %	7.66 %
3.3 V ±10 %	-2.19 %	2.17 %	-5.73 %	4.18 %	-7.22 %	7.78 %
5 V ±10 %	-3.17 %	4.44 %	-6.33 %	4.88 %	-7.66 %	7.63 %
2.5 V - 4.5 V	-2.72 %	2.42 %	-6.05 %	4.37 %	-7.22 %	7.99 %
1.71 V - 5.5 V	-4.58 %	5.93 %	-6.97 %	5.93 %	-7.28 %	8.19 %

5.10.2 2 MHz RC Oscillator

Table 8. 2 MHz RC OSC Frequency Limits

Power Supply Range (V _{DD}), V	Temperature Range					
	+25 °C		0 °C ... +85 °C		-40 °C ... +85 °C	
	Min., MHz	Max., MHz	Min., MHz	Max., MHz	Min., MHz	Max., MHz
1.8 V ±5 %	1.906	2.068	1.826	2.122	1.762	2.212
3.3 V ±10 %	1.937	2.065	1.845	2.140	1.747	2.191
5 V ±10 %	1.878	2.267	1.815	2.295	1.691	2.295
2.5 V - 4.5 V	1.873	2.114	1.786	2.187	1.741	2.191
1.71 V - 5.5 V	1.690	2.377	1.623	2.394	1.623	2.394

Table 9. 2 MHz RC OSC Frequency Error (Error Calculated Relative to Nominal Value)

Power Supply Range (V _{DD}), V	Temperature Range					
	+25 °C		0 °C ... +85 °C		-40 °C ... +85 °C	
	Error (% at Minimum)	Error (% at Maximum)	Error (% at Minimum)	Error (% at Maximum)	Error (% at Minimum)	Error (% at Maximum)
1.8 V ±5 %	-4.71 %	3.38 %	-8.67 %	6.10 %	-11.90 %	10.61 %
3.3 V ±10 %	-3.15 %	3.26 %	-7.74 %	7.02 %	-12.66 %	9.56 %
5 V ±10 %	-6.10 %	13.35 %	-9.23 %	14.73 %	-15.45 %	14.73 %
2.5 V - 4.5 V	-6.36 %	5.73 %	-10.70 %	9.37 %	-12.95 %	9.56 %
1.71 V - 5.5 V	-15.50 %	18.84 %	-18.85 %	19.72 %	-18.85 %	19.72 %

5.10.3 OSC Power-On Delay

Table 10. Oscillators Power-On Delay at Room Temperature, RC OSC Power Setting, "Auto Power-On"

Power Supply Range (V _{DD}), V	2 MHz		2 MHz Fast Start-up Mode		25 kHz		25 kHz Fast Start-up Mode	
	Typ., ns	Max., ns	Typ., ns	Max., ns	Typ., μs	Max., μs	Typ., μs	Max., μs
1.71	108	376.4	60	306.7	0.14	41.10	0.43	41.33
1.80	95	351.6	53	291.3	0.12	41.31	0.41	41.23
1.89	83	332.0	46	278.5	0.11	41.04	0.40	41.18
2.30	53	279.0	30	244.0	0.07	41.18	0.34	41.28
2.50	44	265.1	24	234.9	0.06	41.12	0.33	40.93
2.70	38	254.3	21	227.9	0.05	41.24	2.78	41.17
3.00	31	243.5	17	220.5	0.04	41.30	8.73	41.06
3.30	26	235.8	14	215.4	0.04	41.31	11.30	41.19
3.60	23	230.5	13	211.8	0.03	41.19	16.55	41.40
4.20	16	224.3	7	207.8	0.02	41.27	19.65	41.31
4.50	14	223.1	5	206.9	0.41	41.27	19.64	41.20
5.00	12	230.1	5	211.3	1.25	41.25	19.60	41.19
5.50	10	228.1	4	212.0	1.32	41.25	19.54	40.99

6.0 Summary of Macrocell Function

6.1 IO Pins

- Digital Input (low voltage or normal voltage, with or without Schmitt Trigger)
- Open-Drain Outputs (NMOS and PMOS, 1X and 2X)
- Push-Pull Outputs (1X and 2X)
- 10 k Ω /100 k Ω /1 M Ω pull-up/pull-down resistors
- Pins 4 and 8 can be configured as bidirectional IO

6.2 Connection Matrix

- Digital matrix for circuit connections based on the user design

6.3 Combinational Logic Look Up Tables (LUTs – 4 total)

- Two 2-bit Look Up Tables
- Two 3-bit Look Up Tables

6.4 Combination Function Macrocells (7 total)

- Two Selectable DFF/Latch or 2-bit LUTs
- Two Selectable DFF/Latch or 3-bit LUTs
- One Selectable Pipe Delay or 3-bit LUT
- One Selectable CNT/DLY or 4-bit LUT
- One Programmable Delay or Deglitch Filter

6.5 Delays/Counters (3 total)

- Three 8-bit delays/counters with external clock/reset: range is 1-255 clock cycles

6.6 Pipe Delay (Part of Combination Function Macrocell)

- 8 stage/2 output
- Two 1 to 8 stage selectable outputs

6.7 Programmable Delay

- 140 ns/280 ns/420 ns/560 ns @ $V_{DD} = 3.3$ V
- Includes Edge Detection function

6.8 Additional Logic Functions (Part of Combination Function Macrocell)

- One Deglitch filter macrocell

6.9 RC Oscillator

- 25 kHz or 2 MHz selectable frequency
- First Stage Clock pre-divider: OSC/1, OSC/2, OSC/4, and OSC/8
- Second stage divider control with two outputs, OUT0 and OUT1: selectable (OSC/1, OSC/2, OSC/3, OSC/4, OSC/8, OSC/12, OSC/24, or OSC/64)

6.10 Power-On Reset (POR)

7.0 IO Pins

The SLG46108 has a total of six multi-function IO pins, which can function as either a user-defined input or output. Refer to Section 2.0 *Pin Description* for pin definitions.

Of the six user-defined IO pins of the SLG46108, all but one of the pins (Pin 2) can serve as both digital input and digital output. Pin 2 can only serve as a digital input pin.

7.1 Input Modes

Each IO pin can be configured as a digital input pin with/without buffered Schmitt trigger, or can also be configured as a Low Voltage Digital Input.

7.2 Output Modes

Pins 3, 4, 6, 7, and 8 can all be configured as digital output pins.

7.3 Pull-Up/Down Resistors

All IO pins have an option for the user-selectable resistors connected to the input structure. The selectable values on these resistors are 10 k Ω , 100 k Ω , and 1 M Ω . In the case of Pin 2, the resistors are fixed to a pull-down configuration. In the case of all other IO pins, the internal resistors can be configured as either pull-up or pull-downs.

7.4 IO Register Settings

7.4.1 Pin 2 Register Settings

Table 11. Pin 2 Register Settings

Signal Function	Register Bit Address	Register Definition
Pin 2 Mode Control	reg <350:349>	00: Digital Input without Schmitt trigger 01: Digital Input with Schmitt trigger 10: Low Voltage Digital Input 11: Reserved
Pin 2 Pull-Down Resistor Value Selection	reg <352:351>	00: Floating 01: 10 kΩ Resistor 10: 100 kΩ Resistor 11: 1 MΩ Resistor

7.4.2 Pin 3 Register Settings

Table 12. Pin 3 Register Settings

Signal Function	Register Bit Address	Register Definition
Pin 3 Mode Control	reg <355:353>	000: Digital Input without Schmitt trigger 001: Digital Input with Schmitt trigger 010: Low Voltage Digital Input 011: Reserved 100: Push-Pull 101: Open-Drain NMOS 110: Open-Drain PMOS 111: Reserved
Pin 3 Pull-Up/Down Resistor Value Selection	reg <357:356>	00: Floating 01: 10 kΩ Resistor 10: 100 kΩ Resistor 11: 1 MΩ Resistor
Pin 3 Pull-Up/Down Resistor Selection	reg <358>	0: Pull-Down Resistor 1: Pull-Up Resistor
Pin 3 Driver Strength Selection	reg <359>	0: 1X 1: 2X

7.4.3 Pin 4 Register Settings

Table 13. Pin 4 Register Settings

Signal Function	Register Bit Address	Register Definition
Pin 4 Mode Control (sig_PIN4_oe = 0)	reg <361:360>	00: Digital Input without Schmitt trigger 01: Digital Input with Schmitt trigger 11: Low Voltage Digital Input 10: Reserved
Pin 4 Mode Control (sig_PIN4_oe = 1)	reg <363:362>	00: Push-Pull 1X 01: Push-Pull 2X 10: Open-Drain NMOS 1X 11: Open-Drain NMOS 2X
Pin 4 Pull-Up/Down Resistor Value Selection	reg <365:364>	00: Floating 01: 10 kΩ Resistor 10: 100 kΩ Resistor 11: 1 MΩ Resistor
Pin 4 Pull-Up/Down Resistor Selection	reg <366>	0: Pull-Down Resistor 1: Pull-Up Resistor

7.4.4 Pin 6 Register Settings

Table 14. Pin 6 Register Settings

Signal Function	Register Bit Address	Register Definition
Pin 6 Mode Control	reg <370:368>	000: Digital Input without Schmitt trigger 001: Digital Input with Schmitt trigger 010: Low Voltage Digital Input 011: Reserved 100: Push-Pull 101: Open-Drain NMOS 110: Open-Drain PMOS 111: Reserved
Pin 6 Pull-Up/Down Resistor Value Selection	reg <372:371>	00: Floating 01: 10 kΩ Resistor 10: 100 kΩ Resistor 11: 1 MΩ Resistor
Pin 6 Pull-Up/Down Resistor Value Selection	reg <373>	0: Pull-Down Resistor 1: Pull-Up Resistor
Pin 6 Pull-Up/Down Resistor Selection	reg <374>	0: 1X 1: 2X

7.4.5 Pin 7 Register Settings

Table 15. Pin 7 Register Settings

Signal Function	Register Bit Address	Register Definition
Pin 7 Mode Control	reg <377:375>	000: Digital Input without Schmitt trigger 001: Digital Input with Schmitt trigger 010: Low Voltage Digital Input 011: Reserved 100: Push-Pull 101: Open-Drain NMOS 110: Open-Drain PMOS 111: Reserved
Pin 7 Pull-Up/Down Resistor Value Selection	reg <379:378>	00: Floating 01: 10 kΩ Resistor 10: 100 kΩ Resistor 11: 1 MΩ Resistor
Pin 7 Pull-Up/Down Resistor Selection	reg <380>	0: Pull-Down Resistor 1: Pull-Up Resistor
Pin 7 Driver Strength Selection	reg <381>	0: 1X 1: 2X

7.4.6 Pin 8 Register Settings

Table 16. Pin 8 Register Settings

Signal Function	Register Bit Address	Register Definition
Pin 8 Mode Control (sig_PIN8_oe = 0)	reg <383:382>	00: Digital Input without Schmitt trigger 01: Digital Input with Schmitt trigger 11: Low Voltage Digital Input 10: Reserved
Pin 8 Mode Control (sig_PIN8_oe = 1)	reg <385:384>	00: Push-Pull 1X 01: Push-Pull 2X 10: Open-Drain NMOS 1X 11: Open-Drain NMOS 2X
Pin 8 Pull-Up/Down Resistor Value Selection	reg <387:386>	00: Floating 01: 10 kΩ Resistor 10: 100 kΩ Resistor 11: 1 MΩ Resistor
Pin 8 Pull-Up/Down Resistor Selection	reg <388>	0: Pull-Down Resistor 1: Pull-Up Resistor

7.5 GPI IO Structure

7.5.1 GPI IO Structure (for Pin 2)

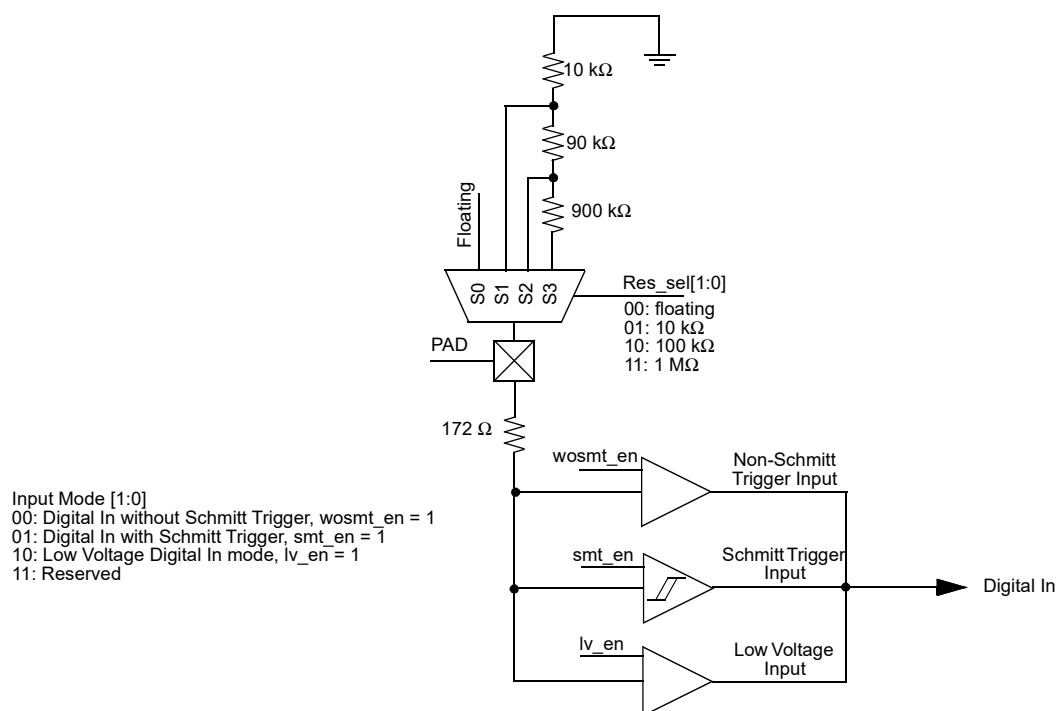


Figure 3. Pin 2 GPI IO Structure Diagram

7.6 Matrix OE IO Structure

7.6.1 Matrix OE IO Structure (for Pin 4, 8)

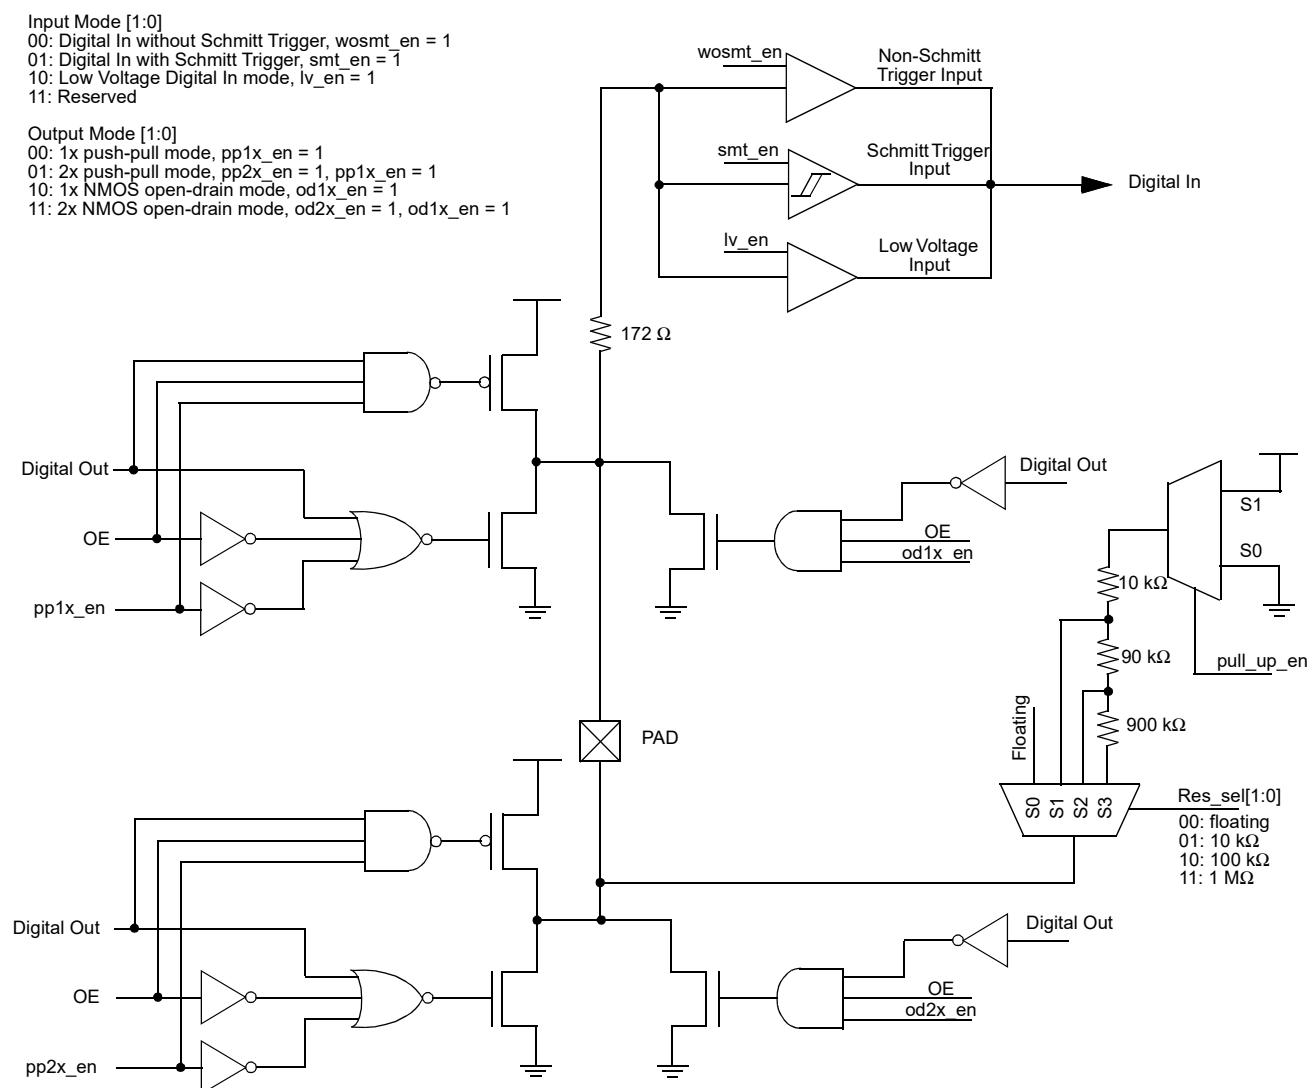


Figure 4. Matrix OE IO Structure Diagram

7.7 Register OE IO Structure

7.7.1 Register OE IO Structure (for Pins 3, 6, 7)

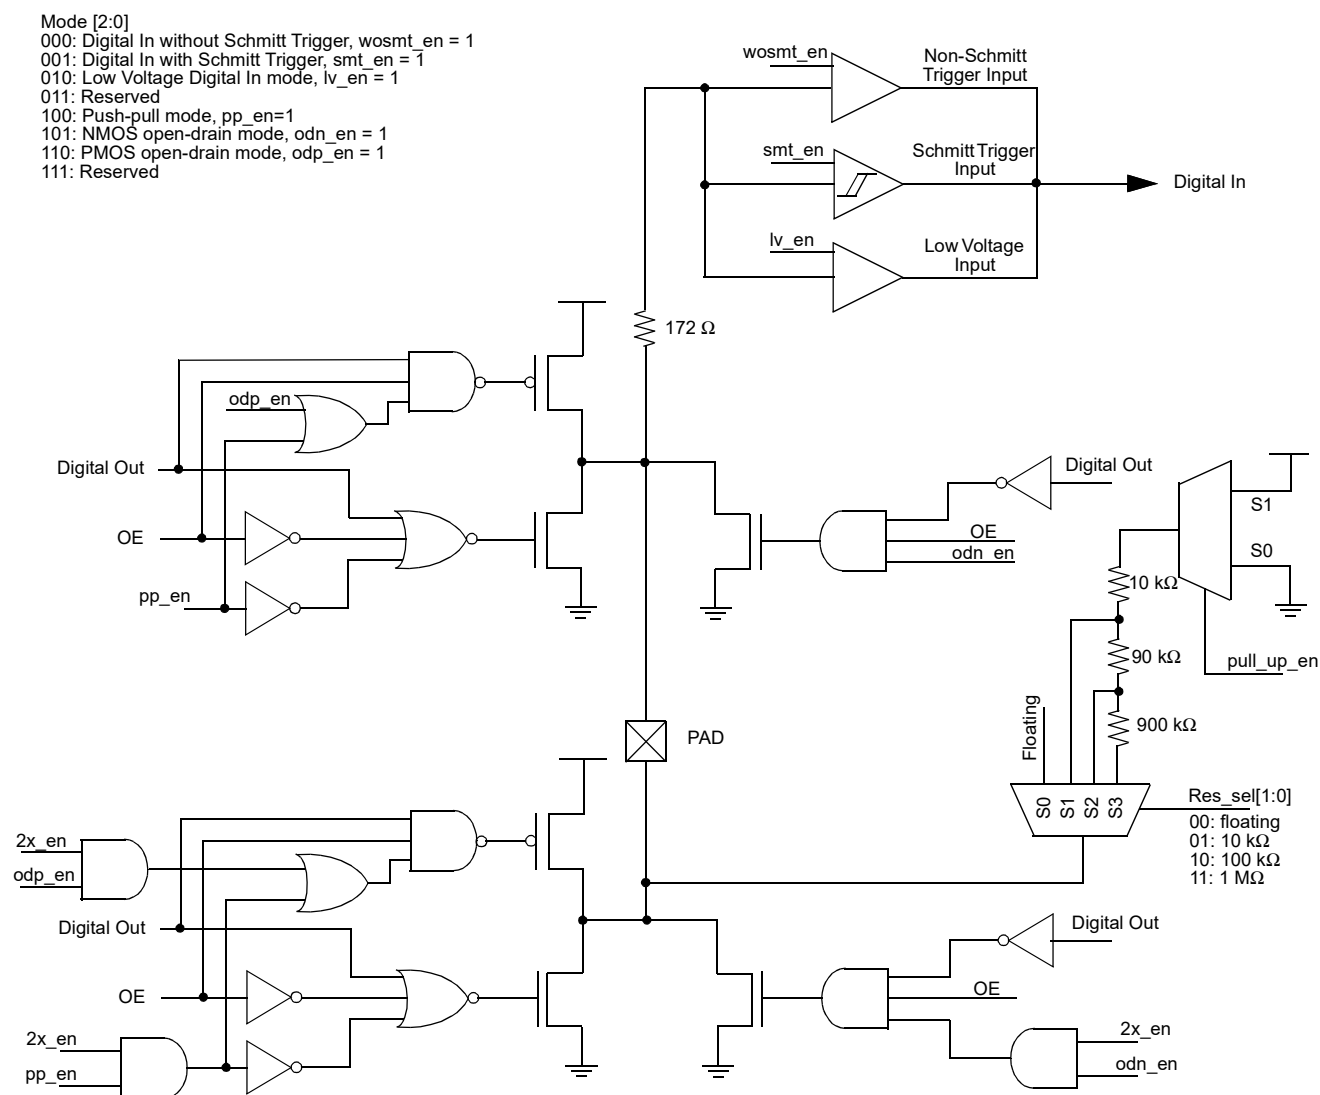


Figure 5. Register OE IO Structure Diagram

8.0 Connection Matrix

The Connection Matrix in the SLG46108 is used to create the internal routing for internal functions of the device once it is programmed. The registers are programmed from the one time NVM cell during the Test Mode Operation. Each connection point for each logic cell within the SLG46108 has a specific digital bit code assigned to it that is either set to active HIGH or inactive LOW, based on the design that is created. Once 463 register bits within the SLG46108 are programmed, a fully custom circuit will be created.

The Connection Matrix has 32 inputs and 40 outputs. Each of the 32 inputs to the Connection Matrix is hard-wired to a particular source macrocell, including IO pins, LUTs, other digital resources, V_{DD} , and GND. The input to a digital macrocell uses a 5-bit register to select one of these 32 input lines.

For a complete list of the SLG46108's register table, see Section 14.0 Appendix A - SLG46108 Register Definition.

Matrix Input Signal Functions	N					
GND	0					
Pin 2 Digital In	1					
Pin 3 Digital In	2					
Pin 4 Digital In	3					
⋮	⋮					
DFF3 nQ Output	30					
V _{DD}	31					
Matrix Inputs	N	0	1	2	⋮	39
	Registers	reg <4:0>	reg <9:5>	reg <14:10>	⋮	reg <199:195>
	Function	Pin 3 Digital Output Source	Pin 4 Digital Output Source	Pin 4 Digital Output Enable	⋮	Pin 8 Digital Output Enable
Matrix Outputs						

Figure 6. Connection Matrix

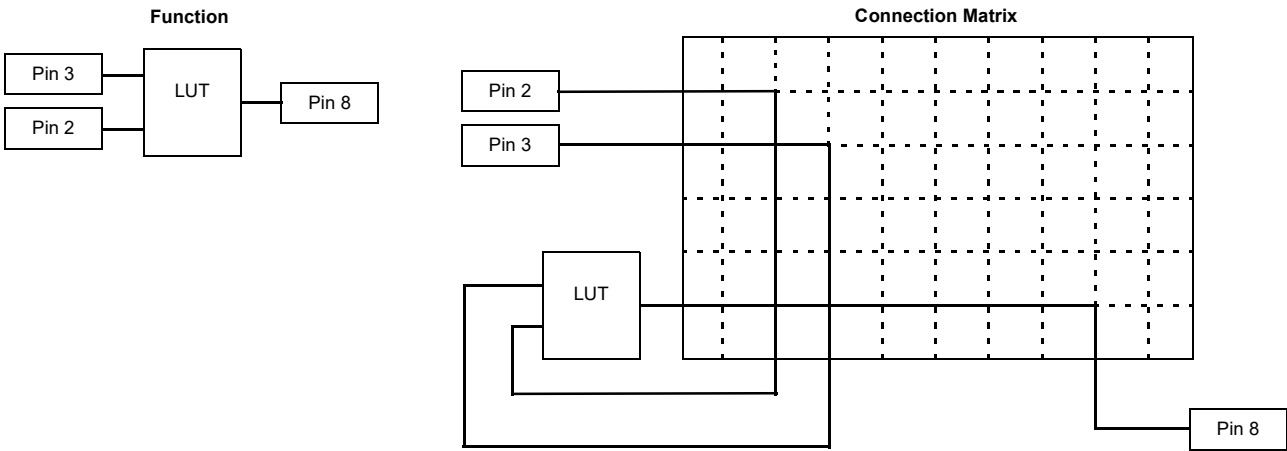


Figure 7. Connection Matrix Example

8.1 Matrix Input Table

Table 17. Matrix Input Table

N	Matrix Input Signal Function	Matrix Decode				
		4	3	2	1	0
0	GND	0	0	0	0	0
1	Pin 2 digital Input	0	0	0	0	1
2	Pin 3 digital Input	0	0	0	1	0
3	Pin 4 digital Input	0	0	0	1	1
4	2-bit LUT0 output (DFF/LATCH_0 output)	0	0	1	0	0
5	2-bit LUT1 output (DFF/LATCH_1 output)	0	0	1	0	1
6	2-bit LUT2 output	0	0	1	1	0
7	2-bit LUT3 output	0	0	1	1	1
8	3-bit LUT0 output (DFF/LATCH_2 output with nRST or nSET)	0	1	0	0	0
9	3-bit LUT1 output (DFF/LATCH_3 output with nRST or nSET)	0	1	0	0	1
10	3-bit LUT2 output	0	1	0	1	0
11	3-bit LUT3 output	0	1	0	1	1
12	3-bit LUT4 output (Pipe Delay output0)	0	1	1	0	0
13	Pipe Delay output1	0	1	1	0	1
14	4-bit LUT0 output (CNT_DLY2 output (8 bit w/ external CLK, reset))	0	1	1	1	0
15	CNT_DLY0 output (8 bit w/ external CLK (shared with CNT_DLY1 external CLK), reset)	0	1	1	1	1
16	CNT_DLY1 output (8 bit w/ external CLK (shared with CNT_DLY0 external CLK), reset)	1	0	0	0	0
17	CNT_DLY3 (8 bit) output	1	0	0	0	1
18	CNT_DLY3 (8 bit) edge detect output	1	0	0	1	0
19	Programmable delay with edge detector output (deglitch filter output)	1	0	0	1	1
20	Internal Oscillator output0 (one of /1,/2,/3,/4,/8,/12,/24,/64/ selected by REG)	1	0	1	0	0
21	Internal Oscillator output1 (one of /1,/2,/3,/4,/8,/12,/24,/64/ selected by REG)	1	0	1	0	1
22	GND	1	0	1	1	0
23	Resetb_core POR as matrix input	1	0	1	1	1
24	Pin 6 digital Input	1	1	0	0	0
25	Pin 7 digital Input	1	1	0	0	1
26	Pin 8 digital Input	1	1	0	1	0
27	DFF0 nQ output	1	1	0	1	1
28	DFF1 nQ output	1	1	1	0	0
29	DFF2 nQ output	1	1	1	0	1
30	DFF3 nQ output	1	1	1	1	0
31	V _{DD}	1	1	1	1	1

8.2 Matrix Output Table

Table 18. Matrix Output Table

Register Bit Address	Matrix Output Signal Function	Matrix Output Number
reg <4:0>	Pin 3 digital out source	0
reg <9:5>	Pin 4 digital out source	1
reg <14:10>	Pin 4 output enable	2
reg <19:15>	In0 of 2-bit LUT0 (Clock Input of DFF0)	3
reg <24:20>	In1 of 2-bit LUT0 (Data Input of DFF0)	4
reg <29:25>	In0 of 2-bit LUT1 (Clock Input of DFF1)	5
reg <34:30>	In1 of 2-bit LUT1 (Data Input of DFF1)	6
reg <39:35>	In0 of 2-bit LUT2	7
reg <44:40>	In1 of 2-bit LUT2	8
reg <49:45>	In0 of 2-bit LUT3	9
reg <54:50>	In1 of 2-bit LUT3	10
reg <59:55>	In0 of 3-bit LUT0 (Clock Input of DFF2 with nReset/nSet)	11
reg <64:60>	In1 of 3-bit LUT0 (Data input of DFF2 with nReset/nSet)	12
reg <69:65>	In2 of 3-bit LUT0 (nRST or nSET of DFF2 with nReset/nSet)	13
reg <74:70>	In0 of 3-bit LUT1 (Clock Input of DFF3 with nReset/nSet)	14
reg <79:75>	In1 of 3-bit LUT1 (Data input of DFF3 with nReset/nSet)	15
reg <84:80>	In2 of 3-bit LUT1 (nRST or nSET of DFF3 with nReset/nSet)	16
reg <89:85>	In0 of 3-bit LUT2	17
reg <94:90>	In1 of 3-bit LUT2	18
reg <99:95>	In2 of 3-bit LUT2	19
reg <104:100>	In0 of 3-bit LUT3	20
reg <109:105>	In1 of 3-bit LUT3	21
reg <114:110>	In2 of 3-bit LUT3	22
reg <119:115>	In0 of 3-bit LUT4 (Input of Pipe Delay)	23
reg <124:120>	In1 of 3-bit LUT4 (nRST of Pipe Delay)	24
reg <129:125>	In2 of 3-bit LUT4 (Clock of Pipe Delay)	25
reg <134:130>	In0 of 4-bit LUT0 (Input for Delay2 external clock or Counter2 external Clock)	26
reg <139:135>	In1 of 4-bit LUT0 (Input for Delay2 or Counter2 reset input)	27
reg <144:140>	In2 of 4-bit LUT0 (Input for Counter2 FSM keep signal)	28
reg <149:145>	In3 of 4-bit LUT0 (Input for Counter2 FSM up signal)	29
reg <154:150>	Input for Delay0 or Counter0 reset input	30
reg <159:155>	Input for Delay1 or Counter1 reset input	31
reg <164:160>	Input for Delay0/1 (Counter0/1) external clock	32
reg <169:165>	Input for Delay3 or Counter3 reset input	33
reg <174:170>	Input for programmable delay (deglitch filter input)	34
reg <179:175>	Power-down for Oscillator (higher priority) (HIGH = power-down)	35
reg <184:180>	Pin 6 digital out source	36
reg <189:185>	Pin 7 digital out source	37

Table 18. Matrix Output Table (continued)

Register Bit Address	Matrix Output Signal Function	Matrix Output Number
reg <194:190>	Pin 8 digital out source	38
reg <199:195>	Pin 8 output enable	39

9.0 Combinatorial Logic

Combinatorial logic is supported via four Look Up Tables (LUTs) within the SLG46108. There are two 2-bit LUTs and two 3-bit LUTs. The device also includes six Combination Function Macrocells that can be used as LUTs. For more details, please see Section 10.0 Combination Function Macrocells.

Inputs/Outputs for the four LUTs are configured from the connection matrix with specific logic functions being defined by the state of NVM bits. The outputs of the LUTs can be configured to any user-defined function, including the following standard digital logic devices: AND, NAND, OR, NOR, XOR, XNOR.

9.1 2-Bit LUT

The two 2-bit LUTs each takes in two input signals from the connection matrix and produces a single output, which goes back into the connection matrix.

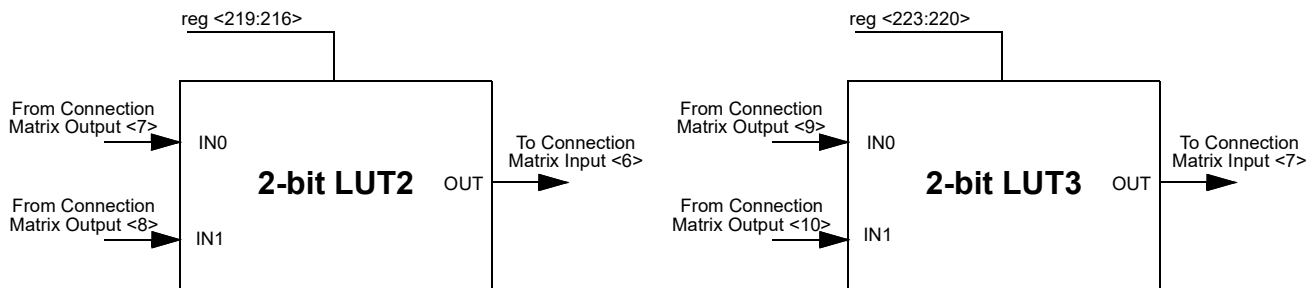


Figure 8. 2-bit LUTs

Table 19. 2-bit LUT2 Truth Table

IN1	IN0	OUT	
0	0	reg <216>	LSB
0	1	reg <217>	
1	0	reg <218>	
1	1	reg <219>	MSB

Table 20. 2-bit LUT3 Truth Table

IN1	IN0	OUT	
0	0	reg <220>	LSB
0	1	reg <221>	
1	0	reg <222>	
1	1	reg <223>	MSB

Each 2-bit LUT uses a 4-bit register signal to define their output functions:

2-bit LUT2 is defined by reg <219:216>

2-bit LUT3 is defined by reg <223:220>

Table 21. 2-bit LUT Standard Digital Functions shows the register bits for the standard digital logic devices (AND, NAND, OR, NOR, XOR, XNOR) that can be created within each of the two 2-bit LUT logic cells.

Table 21. 2-bit LUT Standard Digital Functions .

Function	MSB			LSB
AND-2	1	0	0	0
NAND-2	0	1	1	1
OR-2	1	1	1	0
NOR-2	0	0	0	1
XOR-2	0	1	1	0
XNOR-2	1	0	0	1

9.2 3-Bit LUT

The two 3-bit LUTs each takes in three input signals from the connection matrix and produces a single output, which goes back into the connection matrix.

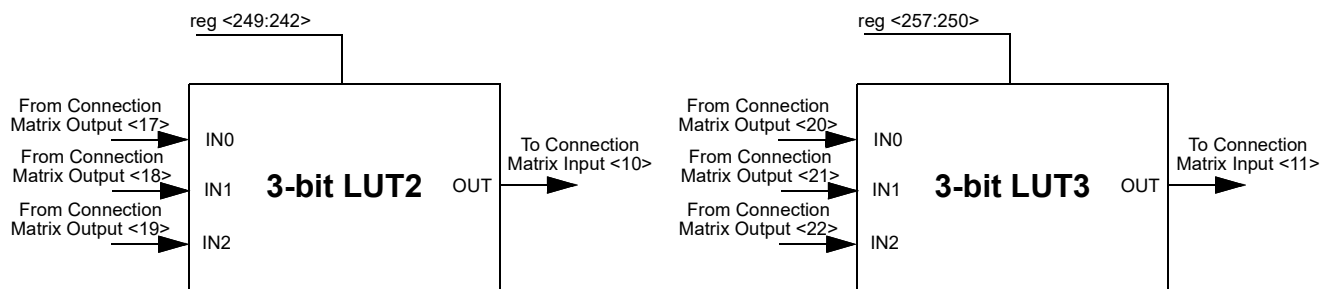


Figure 9. 3-bit LUTs

Table 22. 3-bit LUT2 Truth Table

IN2	IN1	IN0	OUT	
0	0	0	reg <242>	LSB
0	0	1	reg <243>	
0	1	0	reg <244>	
0	1	1	reg <245>	
1	0	0	reg <246>	
1	0	1	reg <247>	
1	1	0	reg <248>	
1	1	1	reg <249>	MSB

Table 23. 3-bit LUT3 Truth Table

IN2	IN1	IN0	OUT	
0	0	0	reg <250>	LSB
0	0	1	reg <251>	
0	1	0	reg <252>	
0	1	1	reg <253>	
1	0	0	reg <254>	
1	0	1	reg <255>	
1	1	0	reg <256>	
1	1	1	reg <257>	MSB

Each 3-bit LUT uses an 8-bit register signal to define their output functions:

3-bit LUT2 is defined by reg <249:242>

3-bit LUT3 is defined by reg <257:250>

Table 24. 3-bit LUT Standard Digital Functions shows the register bits for the standard digital logic devices (AND, NAND, OR, NOR, XOR, XNOR) that can be created within each of the two 3-bit LUT logic cells.

Table 24. 3-bit LUT Standard Digital Functions

Function	MSB							LSB
AND-3	1	0	0	0	0	0	0	0
NAND-3	0	1	1	1	1	1	1	1
OR-3	1	1	1	1	1	1	1	0
NOR-3	0	0	0	0	0	0	0	1
XOR-3	1	0	0	1	0	1	1	0
XNOR-3	0	1	1	0	1	0	0	1

10.0 Combination Function Macrocells

The SLG46108 has seven combination function macrocells that can serve more than one logic or timing function. In six of these cases, they can serve as a Look Up Table (LUT), or as another logic or timing function. In the last case, it can serve as either a programmable delay or a deglitch filter. See the list below for the functions that can be implemented in these macrocells:

- Two macrocells that can serve as either 2-bit LUTs or as DFF/Latch.
- Two macrocells that can serve as either 3-bit LUTs or as DFF/Latch.
- One macrocell that can serve as either 3-bit LUT or as Pipe Delay.
- One macrocells that can serve as either 4-bit LUTs or as 8-bit Counter/Delay.
- One macrocell that can serve as either a Programmable Delay or as a Deglitch Filter.

Inputs/Outputs for the seven combination function macrocells are configured from the connection matrix with specific logic functions being defined by the state of NVM bits.

When used as a LUT to implement combinatorial logic functions, the outputs of the LUTs can be configured to any user-defined function, including the following standard digital logic devices: AND, NAND, OR, NOR, XOR, XNOR.

When used as a D Flip-Flop/Latch, the source and destination of the inputs and outputs for the DFF/Latches are configured from the connection matrix. An initial state of all DFF/Latch macrocells is user-selectable. All DFF/Latch macrocells have an option to connect both the Q and nQ outputs to the connection matrix. The macrocells DFF2, DFF3 have an additional input from the matrix that can serve as a nSet or nReset function to the macrocell.



The operation of the D Flip-Flop and Latch will follow the functional descriptions below:

DFF: CLK is rising edge triggered, then $Q = D$; otherwise Q will not change.

Latch: if $CLK = 1$, then Q latches D value.

10.1 2-Bit LUT or D Flip-Flop Macrocells

There are two macrocells that can serve as either 2-bit LUTs or as D Flip-Flops. When used to implement LUT functions, the 2-bit LUTs each takes in two input signals from the connection matrix and produces a single output, which goes back into the connection matrix. When used to implement D Flip-Flop function, the two input signals from the connection matrix go to the data (D) and clock (CLK) inputs for the Flip-Flop, with the output going back to the connection matrix.

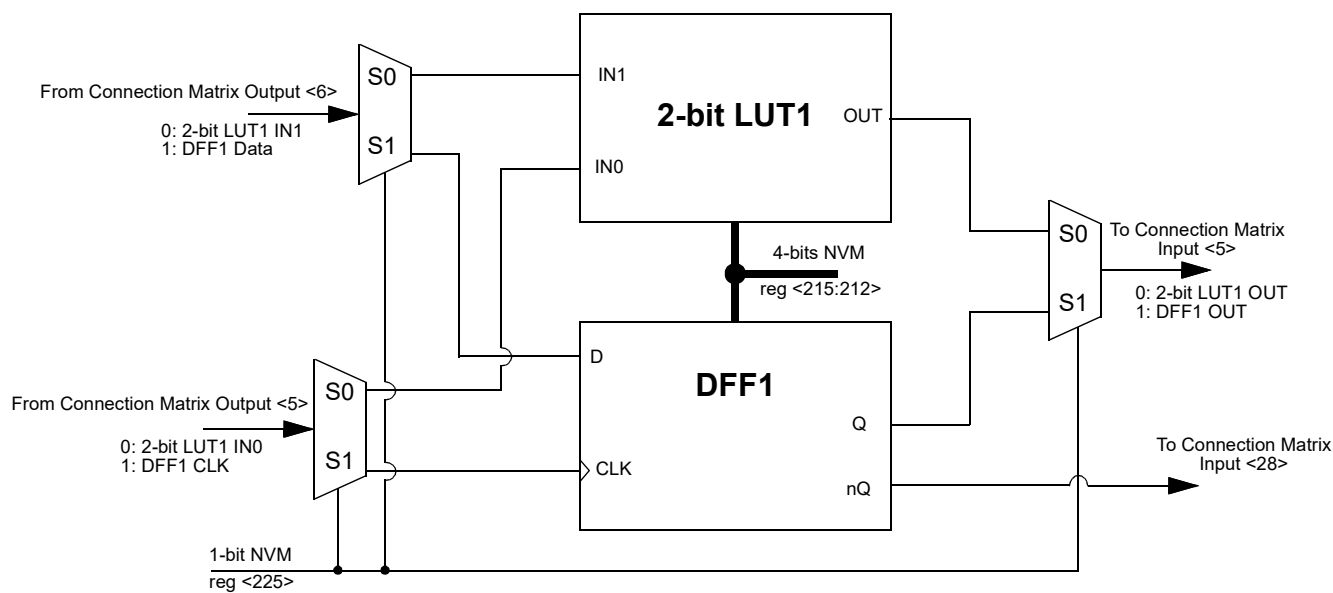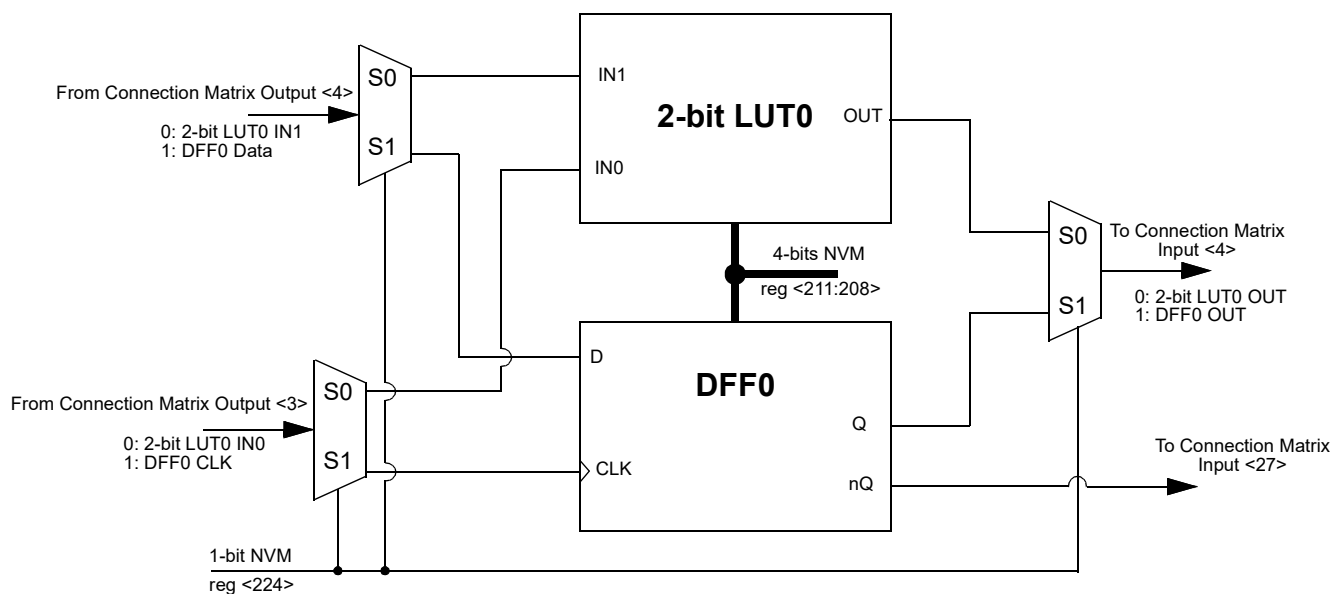

10.1.1 2-Bit LUT or D Flip-Flop Macrocells Used as 2-Bit LUTs

Table 25. 2-bit LUT0 Truth Table

IN1	IN0	OUT	
0	0	reg <208>	LSB
0	1	reg <209>	
1	0	reg <210>	
1	1	reg <211>	MSB

Table 26. 2-bit LUT1 Truth Table

IN1	IN0	OUT	
0	0	reg <212>	LSB
0	1	reg <213>	
1	0	reg <214>	
1	1	reg <215>	MSB

Each macrocell, when programmed for a LUT function, uses a 4-bit register to define their output function:

2-bit LUT0 is defined by reg <211:208>

2-bit LUT1 is defined by reg <215:212>

10.1.2 2-Bit LUT or D Flip-Flop Macrocells Used as D Flip-Flop Register Settings

Table 27. DFF0 Register Settings

Signal Function	Register Bit Address	Register Definition
DFF0 or Latch select	reg <208>	0: DFF function 1: Latch function
DFF0 initial polarity select	reg <210>	0: LOW 1: HIGH
2-bit LUT0 data	reg <211:208>	2-bit LUT0 data
2-bit LUT0 or DFF0 select	reg <224>	0: 2-bit LUT0 1: DFF0

Table 28. DFF1 Register Settings

Signal Function	Register Bit Address	Register Definition
DFF1 or Latch select	reg <212>	0: DFF function 1: Latch function
DFF1 initial polarity select	reg <214>	0: LOW 1: HIGH
2-bit LUT1 data	reg <215:212>	2-bit LUT1 data
2-bit LUT1 or DFF1 select	reg <225>	0: 2-bit LUT1 1: DFF1

10.2 3-Bit LUT or D Flip-Flop with nSet/nReset Macrocells

There are two macrocells that can serve as either 3-bit LUTs or as D Flip-Flops. When used to implement LUT functions, the 3-bit LUTs each takes in three input signals from the connection matrix and produces a single output, which goes back into the connection matrix. When used to implement D Flip-Flop function, the three input signals from the connection matrix go to the data (D) and clock (CLK), and Set/Reset (nRST/nSET) inputs for the Flip-Flop, with the output going back to the connection matrix.

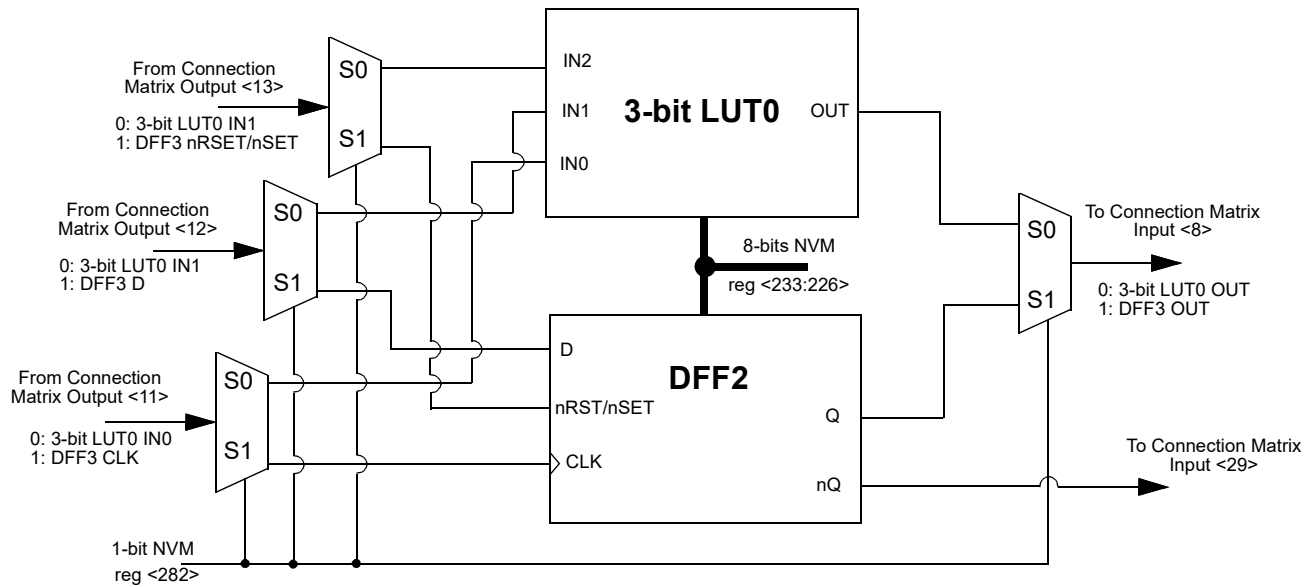


Figure 12. 3-bit LUT0 or DFF2

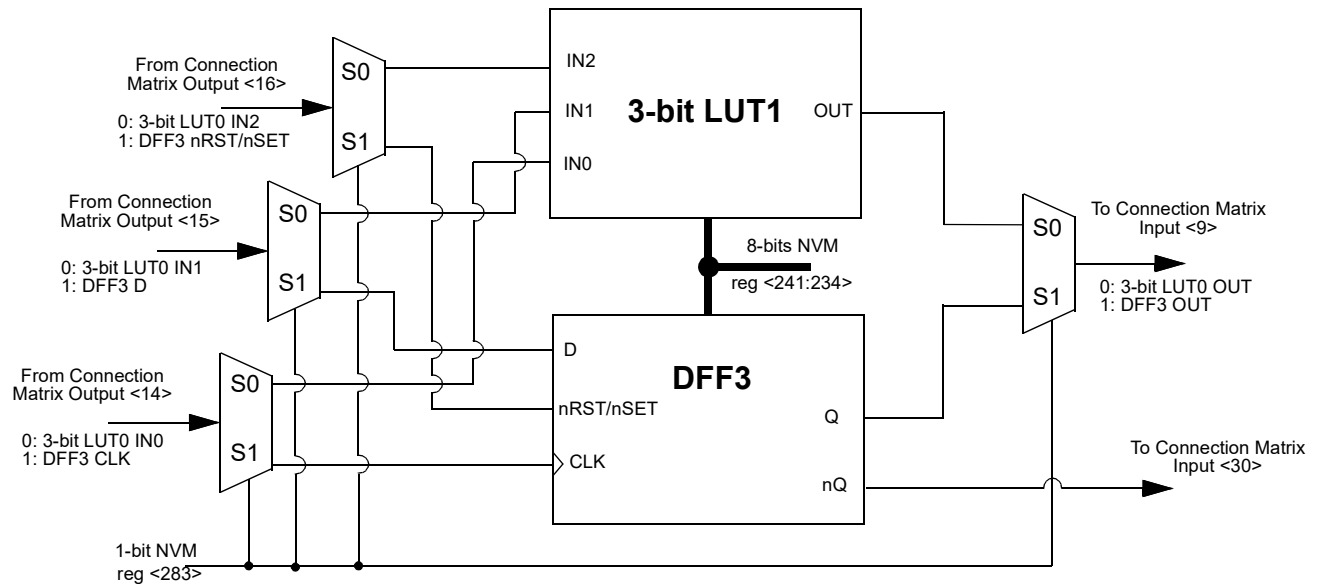


Figure 13. 3-bit LUT1 or DFF3

10.2.1 3-Bit LUT or D Flip-Flop Macrocells Used as 3-Bit LUTs

Table 29. 3-bit LUT0 Truth Table

IN2	IN1	IN0	OUT	
0	0	0	reg <226>	LSB
0	0	1	reg <227>	
0	1	0	reg <228>	
0	1	1	reg <229>	
1	0	0	reg <230>	
1	0	1	reg <231>	
1	1	0	reg <232>	
1	1	1	reg <233>	MSB

Table 30. 3-bit LUT1 Truth Table

IN2	IN1	IN0	OUT	
0	0	0	reg <234>	LSB
0	0	1	reg <235>	
0	1	0	reg <236>	
0	1	1	reg <237>	
1	0	0	reg <238>	
1	0	1	reg <239>	
1	1	0	reg <240>	
1	1	1	reg <241>	MSB

Each macrocell, when programmed for a LUT function, uses an 8-bit register to define their output function:

3-bit LUT2 is defined by reg <233:226>

3-bit LUT3 is defined by reg <241:234>

10.2.2 3-Bit LUT or D Flip-Flop Macrocells Used as D Flip-Flop Register Settings

Table 31. DFF2 Register Settings

Signal Function	Register Bit Address	Register Definition
DFF2 or Latch select	reg <226>	0: DFF function 1: Latch function
DFF2 nRST/nSET select	reg <228>	1: nSET from matrix out 0: nRST from matrix out
DFF2 initial polarity select	reg <229>	0: LOW 1: HIGH
3-bit LUT0 data	reg <233:226>	3-bit LUT0 data
3-bit LUT0 or DFF2 select	reg <266>	0: 3-bit LUT0 1: DFF2

Table 32. DFF3 Register Settings

Signal Function	Register Bit Address	Register Definition
DFF3 or Latch select	reg <234>	0: DFF function 1: Latch function
DFF3 nRST/nSET select	reg <236>	1: nSET from matrix out 0: nRST from matrix out
DFF3 initial polarity select	reg <237>	0: LOW 1: HIGH
3-bit LUT1 data	reg <241:234>	3-bit LUT1 data
3-bit LUT1 or DFF3 select	reg <267>	0: 3-bit LUT1 1: DFF3

10.3 3-Bit LUT or Pipe Delay Macrocell

There is one macrocell that can serve as either a 3-bit LUT or as a Pipe Delay.

When used to implement LUT functions, the 3-bit LUT takes in three input signals from the connection matrix and produces a single output, which goes back into the connection matrix.

When used as an 8-stage Pipe Delay, there are three inputs signals from the matrix, Input (IN), Clock (CLK), and Reset (nRST). The Pipe Delay cell is built from D Flip-Flop logic cells that provide the two user-selectable output options (OUT0 and OUT1). The DFF cells are tied in series, where the output of each delay cell goes to the next DFF cell. There are delay output points for each set of the OUT0 and OUT1 outputs to a 3-input MUX that is controlled by reg <260:258> for OUT0 and reg <263:261> for OUT1. The 3-input MUX is used to control the selection of the amount of delay.

The overall time of the delay is based on the clock used in the SLG46108 design. Each DFF cell has a time delay of the inverse of the clock time (either external clock or the RC Oscillator within the SLG46108). The sum of the number of DFF cells used will be the total time delay of the Pipe Delay logic cell.

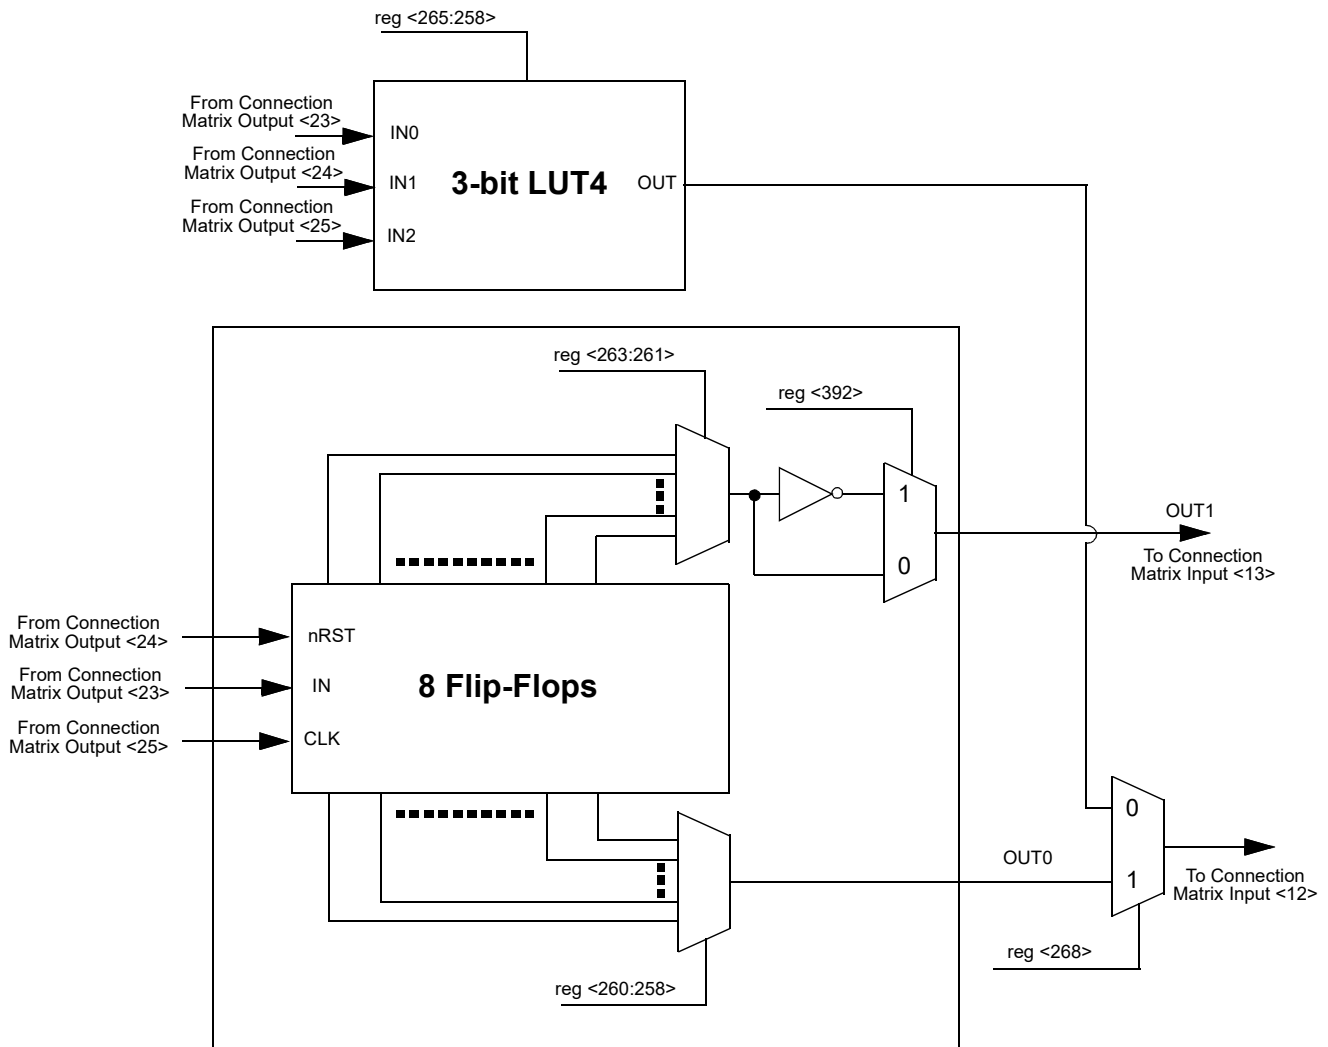


Figure 14. 3-bit LUT4 or Pipe Delay

10.3.1 3-Bit LUT or Pipe Delay Macrocells Used as 3-Bit LUTs

Table 33. 3-bit LUT4 Truth Table

IN2	IN1	IN0	OUT	
0	0	0	reg <258>	LSB
0	0	1	reg <259>	
0	1	0	reg <260>	
0	1	1	reg <261>	
1	0	0	reg <262>	
1	0	1	reg <263>	
1	1	0	reg <264>	
1	1	1	reg <265>	MSB

Each macrocell, when programmed for a LUT function, uses an 8-bit register to define their output function:

3-bit LUT4 is defined by reg <265:258>

10.3.2 3-Bit LUT or Pipe Delay Macrocells Used as Pipe Delay Register Settings

Table 34. Pipe Delay Register Settings

Signal Function	Register Bit Address	Register Definition
OUT0 select	reg <260:258>	data (pipe number)
OUT1 select	reg <263:261>	data (pipe number)
3-bit LUT4 or Pipe Delay output select	reg <268>	0: 3-bit LUT4 1: Pipe Delay

10.4 4-Bit LUT or 8-Bit Counter/Delay Macrocells

There is one macrocell that can serve as either a 4-bit LUT or as a Counter/Delay. When used to implement LUT functions, the 4-bit LUT takes in four input signals from the connection matrix and produces a single output, which goes back into the connection matrix. When used to implement 8-bit Counter/Delay function, two of the four input signals from the connection matrix go to the clock (CLK) and reset (DLY IN/RESET IN) inputs for the counter/delay, with the output going back to the connection matrix. This macrocell has an optional Finite State Machine (FSM) function. It has two additional matrix inputs for Up and Keep to support FSM functionality. The counter is counting down by default. Logic '1' on input Up reverses counting. Logic '1' on input Keep pauses counting.

Note: Counters initialize with counter data after POR.

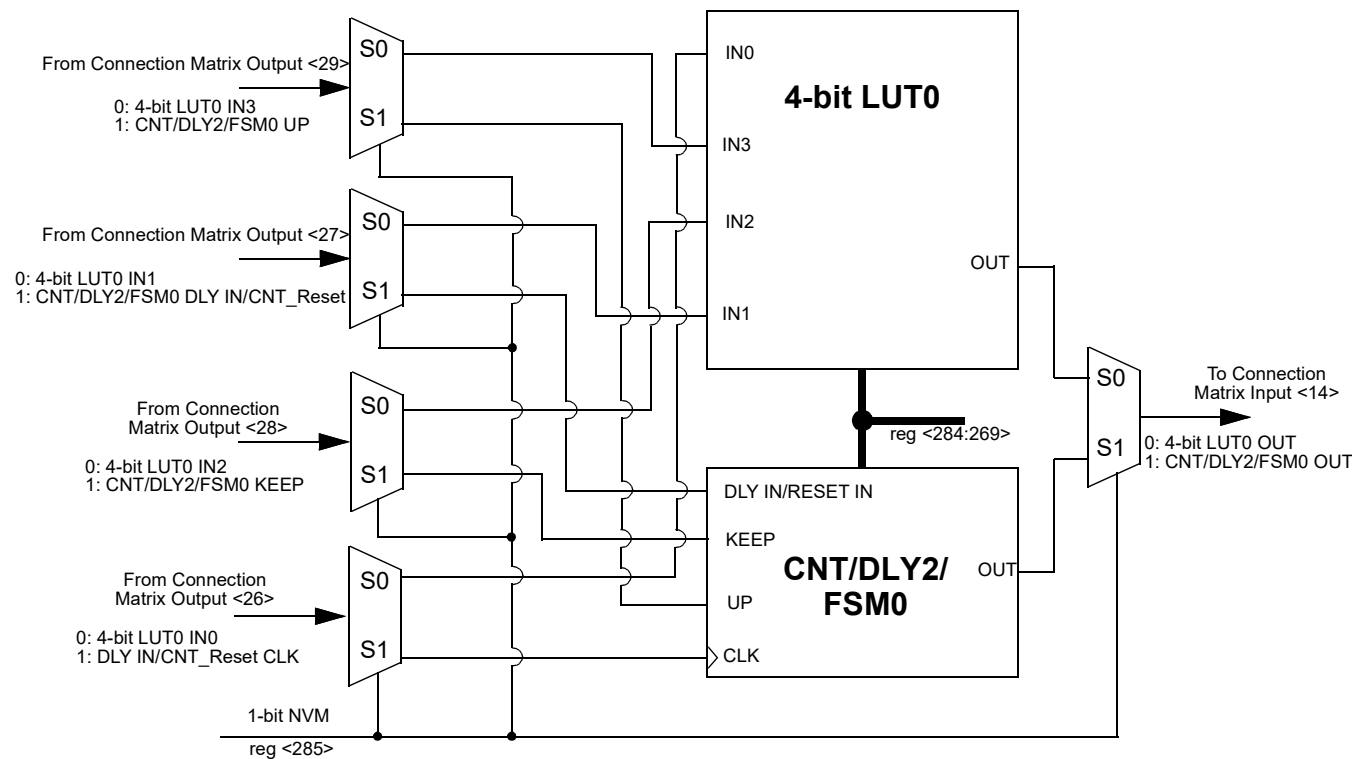


Figure 15. 4-bit LUT1 or CNT/DLY2/FSM0

10.4.1 Counter Mode

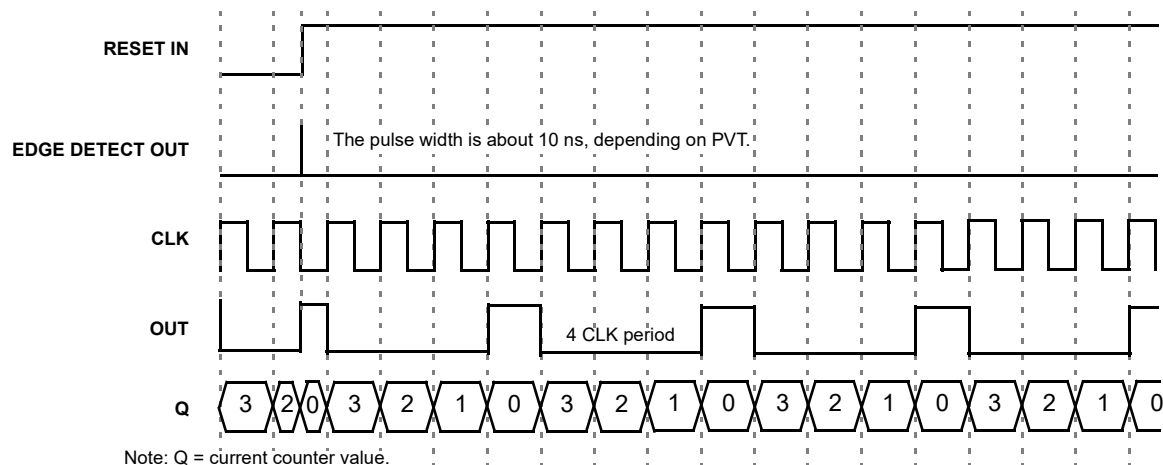


Figure 16. Timing (Reset Rising Edge Mode, Oscillator is Forced On) for Count Data = 3

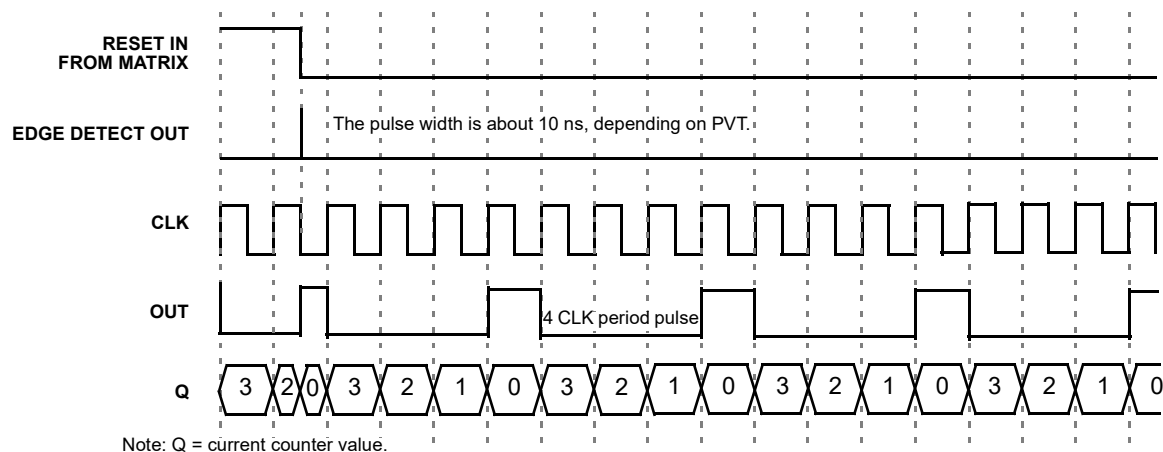


Figure 17. Timing (Reset Falling Edge Mode, Oscillator is Forced On) for Count Data = 3

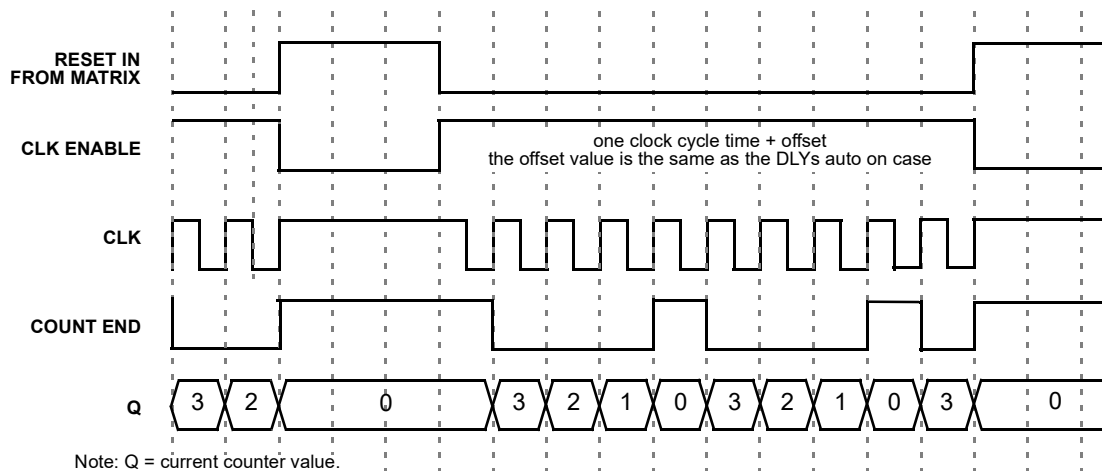


Figure 18. Timing (Reset High Level Mode, Oscillator is Auto Powered On (Controlled by Reset)) for Count Data = 3

10.4.2 FSM Mode

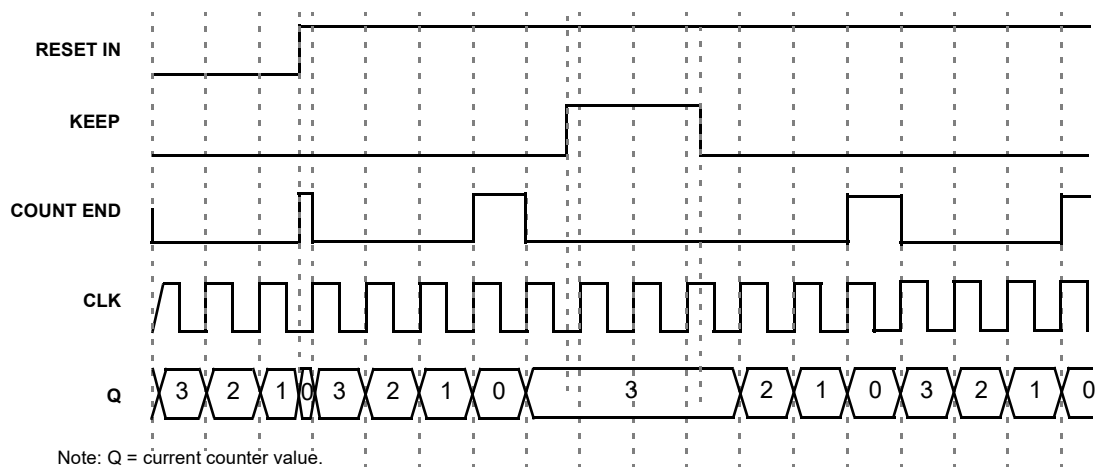


Figure 19. Timing (Reset Rising Edge Mode, Oscillator is Forced On, UP = 0) for Count Data = 3

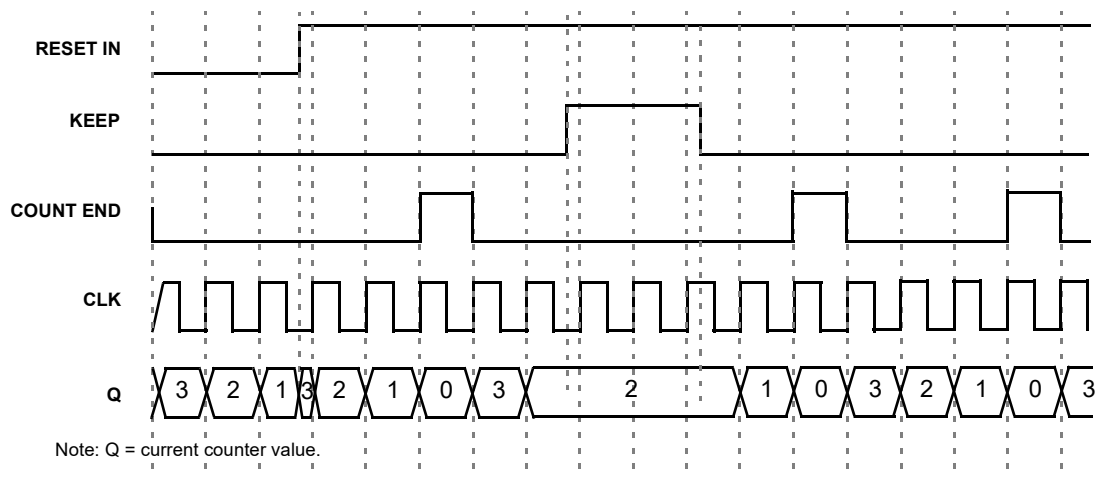


Figure 20. Timing (Set Rising Edge Mode, Oscillator is Forced On, UP = 0) for Count Data = 3

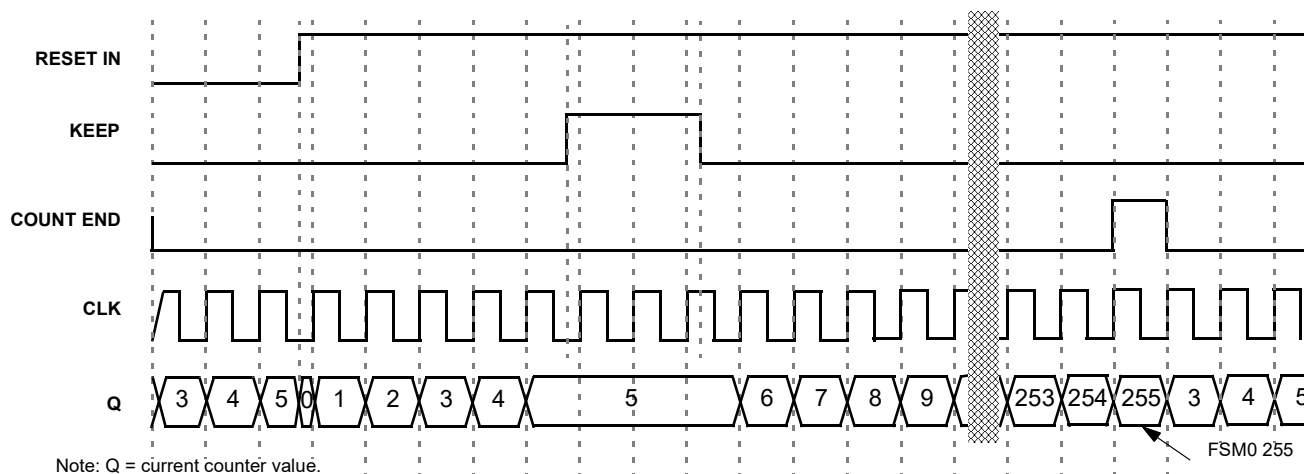


Figure 21. Timing (Reset Rising Edge Mode, Oscillator is Forced On, UP = 1) for Count Data = 3

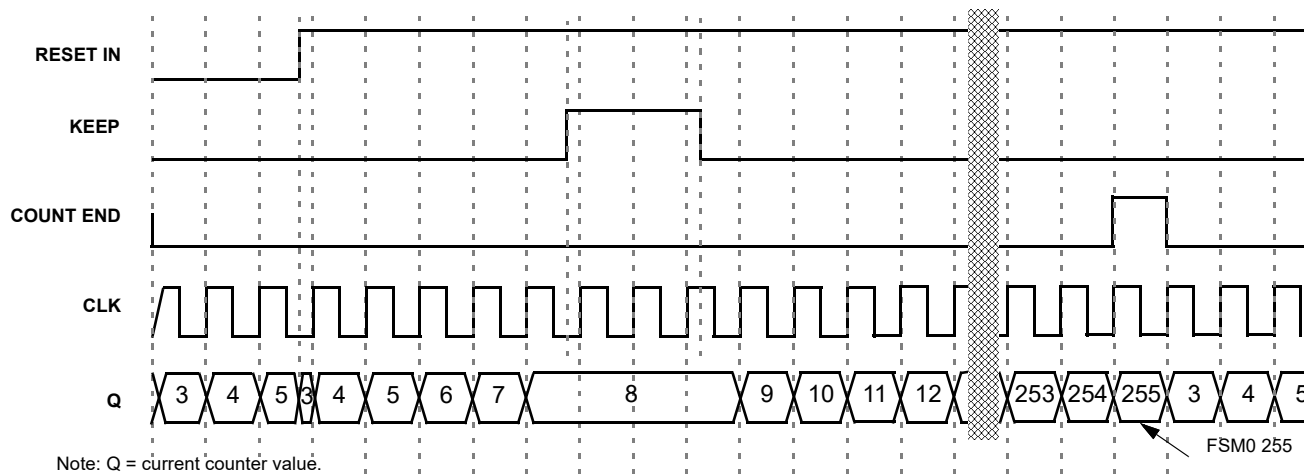


Figure 22. Timing (Set Rising Edge Mode, Oscillator is Forced On, UP = 1) for Count Data = 3

10.4.3 4-Bit LUT or 8-Bit Counter/Delay Macrocell Used as 4-Bit LUT

Table 35. 4-bit LUT0 Truth Table .

IN3	IN2	IN1	IN0	OUT	
0	0	0	0	reg <269>	LSB
0	0	0	1	reg <270>	
0	0	1	0	reg <271>	
0	0	1	1	reg <272>	
0	1	0	0	reg <273>	
0	1	0	1	reg <274>	
0	1	1	0	reg <275>	
0	1	1	1	reg <276>	
1	0	0	0	reg <277>	
1	0	0	1	reg <278>	
1	0	1	0	reg <279>	
1	0	1	1	reg <280>	
1	1	0	0	reg <281>	
1	1	0	1	reg <282>	
1	1	1	0	reg <283>	
1	1	1	1	reg <284>	MSB

Each macrocell, when programmed for a LUT function, uses a 16-bit register to define their output function:

4-bit LUT0 is defined by reg <284:269>

Table 36. 4-bit LUT Standard Digital Functions

Function	MSB															LSB
AND-4	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
NAND-4	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
OR-4	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0
NOR-4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
XOR-4	0	1	1	0	1	0	0	1	1	0	0	1	0	1	1	0
XNOR-4	1	0	0	1	0	1	1	0	0	1	1	0	1	0	0	1

10.4.4 4-Bit LUT or 8-Bit Counter/Delay Macrocells Used as 8-Bit Counter/Delay Register Settings

Table 37. CNT/DLY2 Register Settings

Signal Function	Register Bit Address	Register Definition
Counter/delay2 Mode Selection	reg <269>	0: Delay Mode 1: Counter Mode
Counter/delay2 Clock Source Select	reg <272:270>	000: Internal OSC Clock 001: OSC/4 010: OSC/12 011: OSC/24 100: OSC/64 101: External Clock 110: Reserved 111: Counter1 Overflow
Counter/delay2 Control Data	reg <280:273>	1-255: (delay time = (counter data + 2 + variable)/freq), where $0 < \text{variable} < 1$
Delay2 Mode Select or asynchronous counter reset	reg <282:281>	00: Delay on both falling and rising edges (for delay and counter reset) 01: Delay on falling edge only (for delay and counter reset) 10: Delay on rising edge only (for delay and counter reset) 11: No delay on either falling or rising edges/high level reset for counter mode
4-bit LUT0 or Counter2 select	reg <285>	0: 4-bit LUT0 1: Counter2

10.5 Programmable Delay/Edge Detector (PDLY/Edge Detector)

The SLG46108 has a programmable time delay logic cell available that can generate a delay that is selectable from one of four timings (width/time2). The programmable time delay cell can generate one of four different delay patterns, rising edge detection, falling edge detection, both edge detection, and both edge delay. See *Figure 23.* and *Figure 24.* for further information.

Note: The input signal must be longer than the delay, otherwise it will be filtered out.

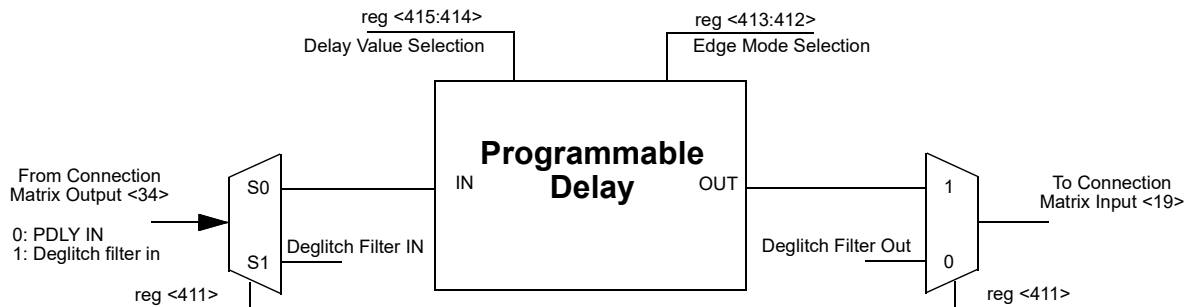


Figure 23. Programmable Delay

10.5.1 Programmable Delay Timing Diagram - Edge Detector Output

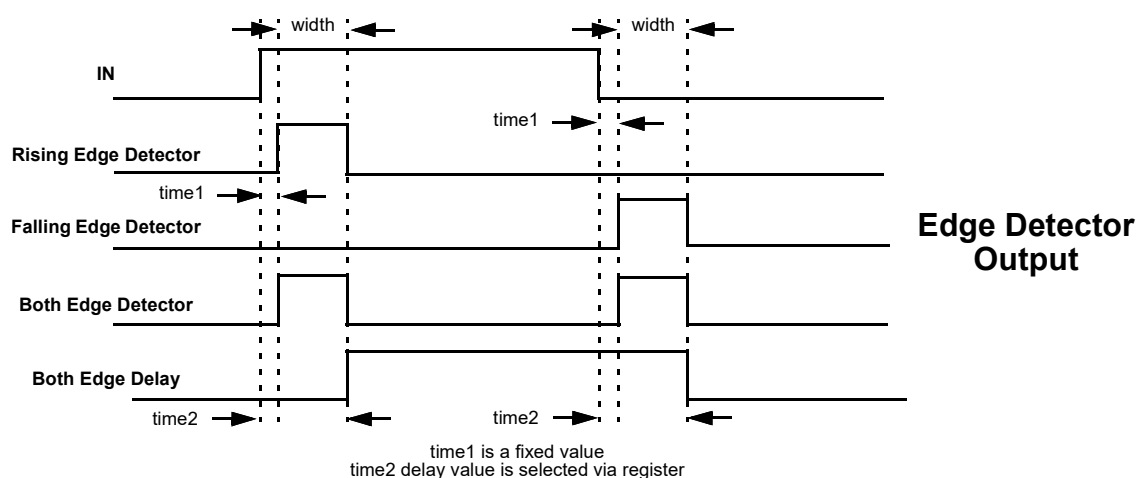


Figure 24. Edge Detector Output

10.5.2 Programmable Delay Register Settings

Table 38. Programmable Delay Register Settings

Signal Function	Register Bit Address	Register Definition
Programmable delay or filter output select	reg <411>	0: Programmable delay output 1: Filter output
Select the edge mode of programmable delay and edge detector	reg <413:412>	00: Rising Edge Detector 01: Falling Edge Detector 10: Both Edge Detector 11: Both Edge Delay
Delay value select for programmable delay and edge detector ($V_{DD} = 3.3\text{ V}$, typical condition)	reg <415:414>	00: 140 ns 01: 280 ns 10: 420 ns 11: 560 ns

10.6 Deglitch Filter

The SLG46108 has an additional logic function that is connected directly to the Connection Matrix inputs and outputs. There is one deglitch filter. Typical filtered pulse width is shown in *Table 5. Typical Pulse Width Performance*.

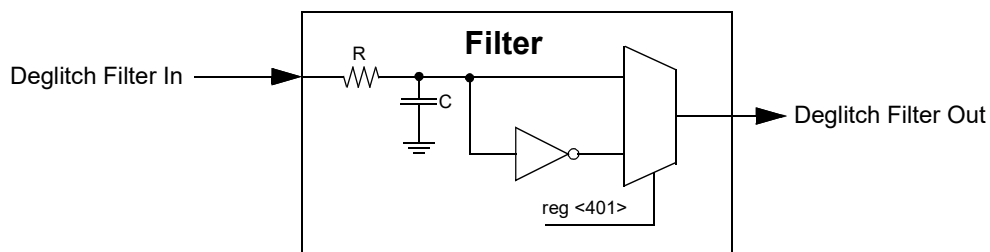


Figure 25. Deglitch Filter

11.0 Counters/Delay Generators (CNT/DLY)

There are three configurable counters/delay generators in the SLG46108. The three counters/delay generators (CNT/DLY 0, 1, 3) are 8-bit. For flexibility, each of these macrocells has a large selection of internal and external clock sources, as well as the option to chain from the output of the previous (N-1) CNT/DLY macrocell, to implement longer count/delay circuits.

Two of the counter/delay generator macrocells (CNT/DLY0 and CNT/DLY1) have two inputs from the connection matrix, one for Delay Input/Reset Input (Delay IN/RESET IN), and one for an external counter/clock source. One of the counter/delay generator macrocells (CNT/DLY3) has one input from the connection matrix, which has a shared function of either a Delay Input or an external clock input.

Note that there is also one Combination Function Macrocell that can implement either 4-bit LUTs or 8-bit counter/delays. For more information please see Section 10.4 4-Bit LUT or 8-Bit Counter/Delay Macrocells.

Note: Counters initialize with counter data after POR.

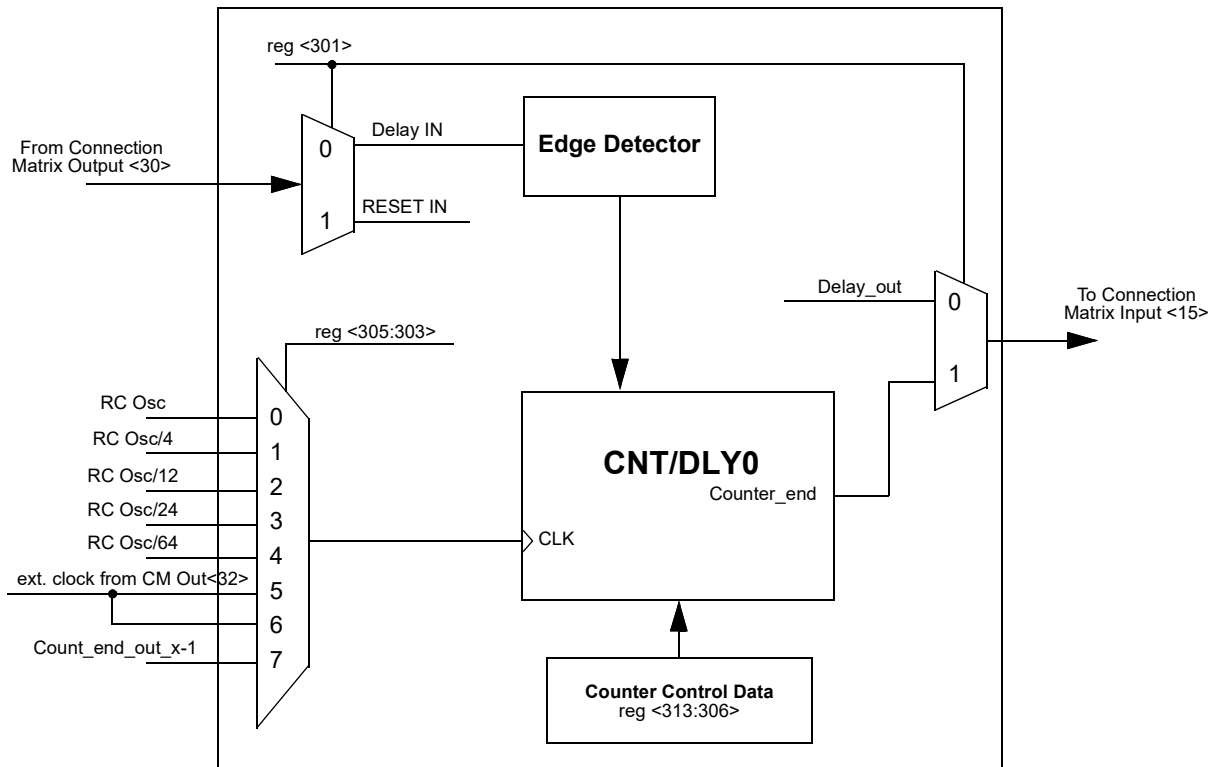


Figure 26. CNT/DLY0

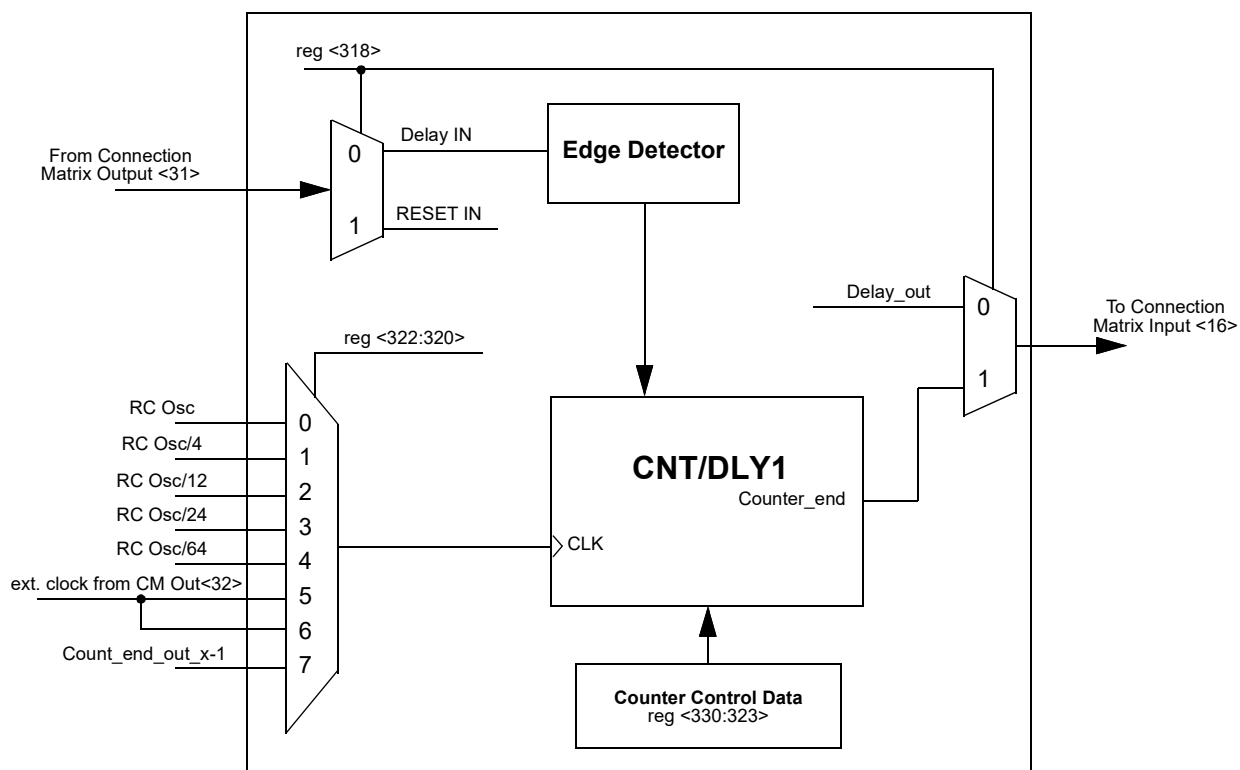


Figure 27. CNT/DLY1

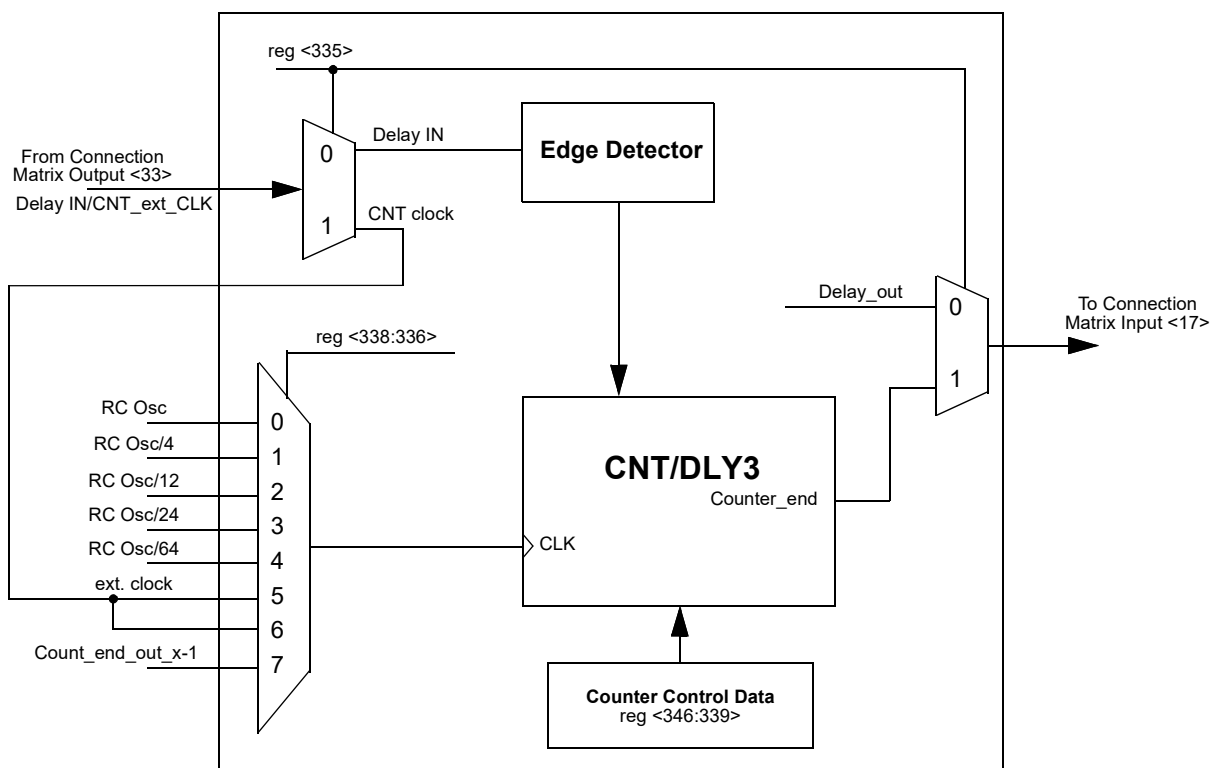


Figure 28. CNT/DLY3

11.1 CNT/DLY0 Register Settings

Table 39. CNT/DLY0 Register Settings

Signal Function	Register Bit Address	Register Definition
Counter/Delay0 Mode Select	reg <301>	0: Delay Mode 1: Counter Mode
Counter/Delay0 Clock Source Select	reg <305:303>	000: Internal OSC Clock 001: OSC/4 010: OSC/12 011: OSC/24 100: OSC/64 101: External Clock 110: Reserved 111: Counter3 Overflow
Counter0 Control Data/Delay0 Time Control	reg <313:306>	1-255: (delay time = (counter data + 2 + variable)/freq), where 0 < variable < 1
Delay0 Mode Select or asynchronous counter reset	reg <315:314>	00: Delay on both falling and rising edges (for delay and counter reset) 01: Delay on falling edge only (for delay and counter reset) 10: Delay on rising edge only (for delay and counter reset) 11: No delay on either falling or rising edges/high level reset for counter mode

11.2 CNT/DLY1 Register Settings

Table 40. CNT/DLY1 Register Settings

Signal Function	Register Bit Address	Register Definition
Counter/Delay1 Mode Select	reg <318>	0: Delay Mode 1: Counter Mode
Counter/Delay1 Clock Source Select (external clock is only for counter mode)	reg <322:320>	000: Internal OSC Clock 001: OSC/4 010: OSC/12 011: OSC/24 100: OSC/64 101: External Clock 110: Reserved 111: Counter0 Overflow
Counter1 Control Data/Delay1 Time Control	reg <330:323>	1-255: (delay time = (counter data + 2 + variable)/freq), where 0 < variable < 1
Delay1 Mode Select or asynchronous counter reset	reg <332:331>	00: Delay on both falling and rising edges (for delay and counter reset) 01: Delay on falling edge only (for delay and counter reset) 10: Delay on rising edge only (for delay and counter reset) 11: No delay on either falling or rising edges/high level reset for counter mode

11.3 CNT/DLY3 Register Settings

Table 41. CNT/DLY3 Register Settings

Signal Function	Register Bit Address	Register Definition
Counter/Delay3 Mode Select	reg <335>	0: Delay Mode 1: Counter Mode
Counter/Delay3 Clock Source Select (external clock is only for counter mode)	reg <338:336>	000: Internal OSC Clock 001: OSC/4 010: OSC/12 011: OSC/24 100: OSC/64 101: External Clock 110: Reserved 111: Counter2 Overflow
Counter3 Control Data/Delay3 Time Control	reg <346:339>	1-255: (delay time = (counter data + 2 + variable)/freq), where 0 < variable < 1
Delay3 Mode Select	reg <348:347>	00: Delay on both falling and rising edges 01: Delay on falling edge only 10: Delay on rising edge only 11: No delay on either falling or rising edges

12.0 RC Oscillator (RC OSC)

12.1 RC Oscillator Overview

The SLG46108 has an internal RC Oscillator with two selectable frequencies, 25 kHz or 2 MHz. When using the chip internal RC OSC, a choice is available to “Force Power-On”, meaning that the RC OSC will always run, or “Auto Power-On”, meaning that the RC OSC will have an associated startup and settling time associated with it (offset). *Figure 29.* and *Figure 30.* show maximum power-on delay vs. V_{DD} .

The RC OSC Macrocell (25 kHz or 2 MHz) features a FAST START UP option. When it is enabled, the Oscillator starts immediately after power-up and provides a stable clock output within the first few clock cycles. This option is enabled by setting reg <300> to ‘1’.

Note: RC OSC power setting: "Auto Power-On".

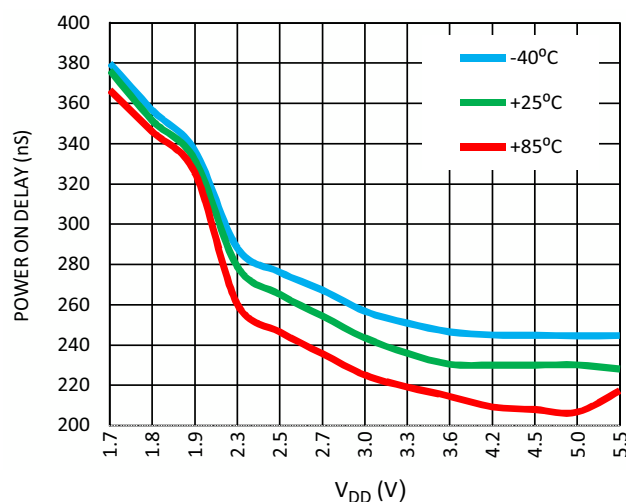


Figure 29. Maximum Power-On Delay vs. V_{DD} , RC OSC = 2 MHz

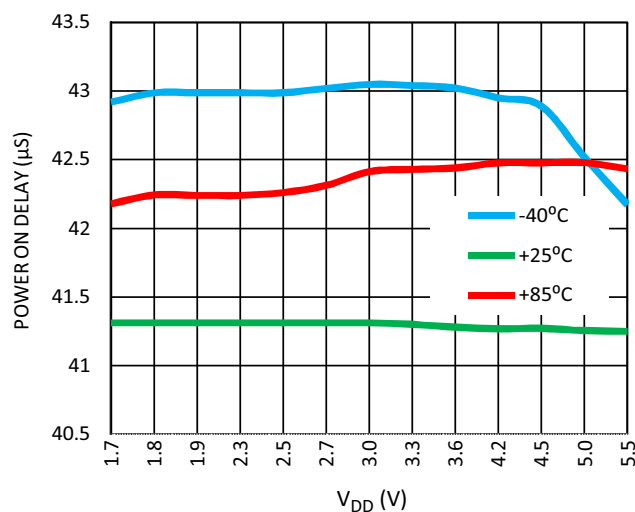


Figure 30. Maximum Power-On Delay vs. V_{DD}, RC OSC = 25 kHz

The user can select one of these fundamental frequencies for the RC OSC Macrocell, or the fundamental frequency can also come from an external clock input (Pin 8). There are two divider stages that allow the user flexibility for introducing clock signals on various Connection Matrix Input lines. The first stage divider (pre-divider) allows the selection of /1, /2, /4, or /8 divide down frequency from the fundamental. There are two second stage divider controls (OUT0 and OUT1). Each has its own input of one frequency from the first stage divider, and outputs five different frequencies on Connection Matrix Input lines <20> and <21>. See *Figure 31.* for details of the frequencies for each of these five Connection Matrix Inputs.

If PWR DOWN input of Oscillator is LOW, the Oscillator will be turned on. If PWR DOWN input of Oscillator is HIGH, the Oscillator will be turned off. The PWR DOWN signal has the highest priority.

12.2 RC OSC Block Diagram

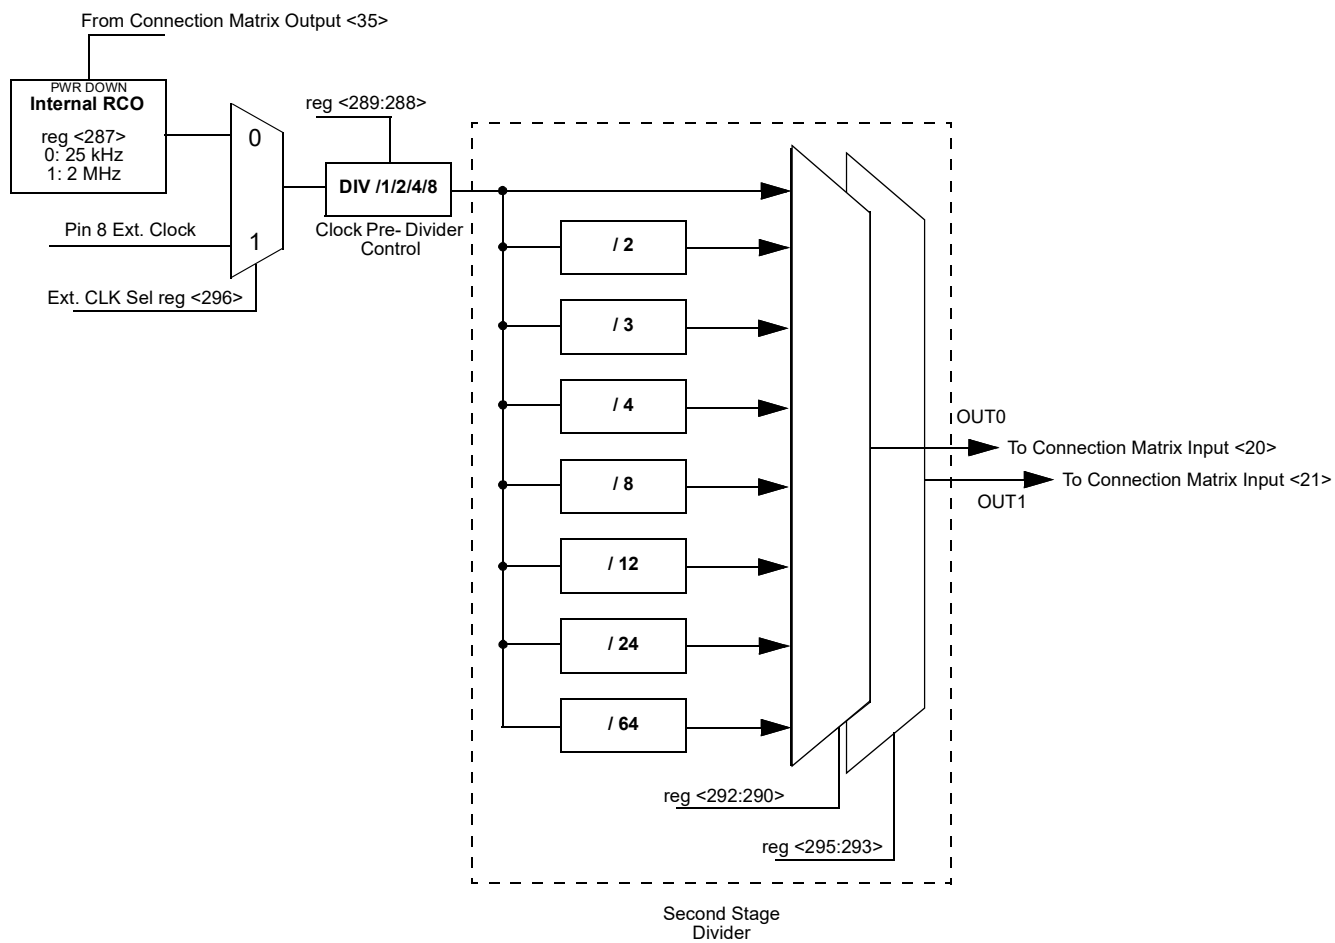


Figure 31. RC OSC Block Diagram

12.3 Oscillator Accuracy

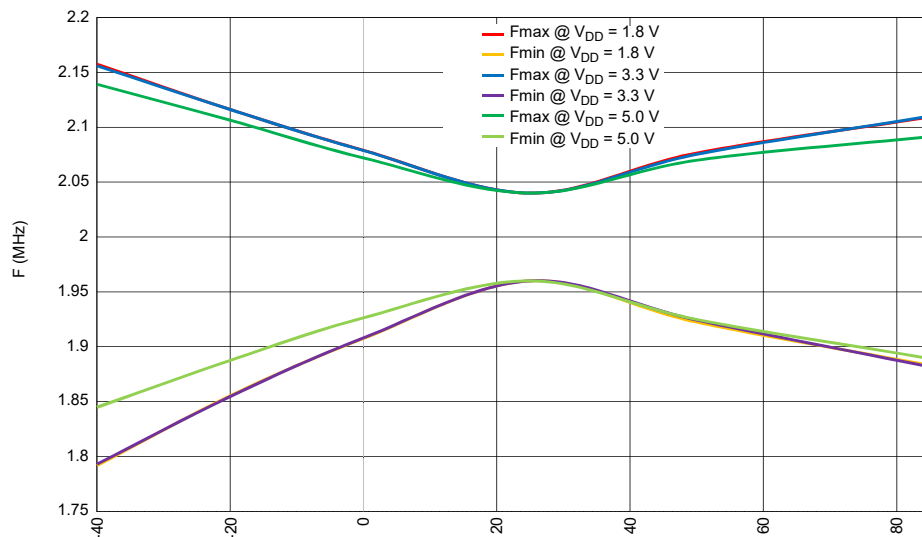


Figure 32. RC Oscillator Frequency vs. Temperature, RC OSC = 2 MHz

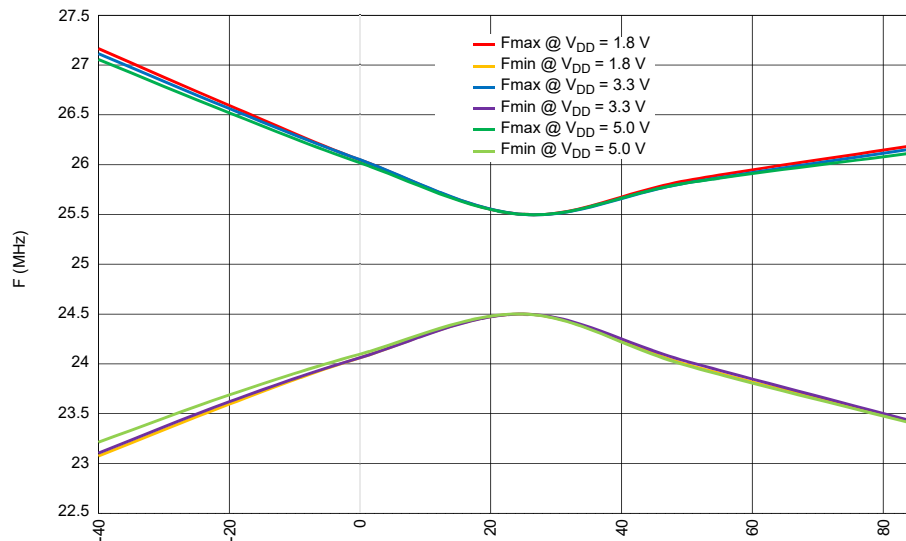


Figure 33. RC Oscillator Frequency vs. Temperature, RC OSC = 25 kHz

13.0 Power-On Reset (POR)

The SLG46108 has a power-on reset (POR) macrocell to ensure correct device initialization and operation of all macrocells in the device. The purpose of the POR circuit is to have consistent behavior and predictable results when the V_{DD} power is first ramping to the device, and also while the V_{DD} is falling during power-down. To accomplish this goal, the POR drives a defined sequence of internal events that trigger changes to the states of different macrocells inside the device, and finally to the state of the IO pins.

13.1 General Operation

To start the POR sequence in the SLG46108, the voltage applied on the V_{DD} should be higher than the power-on threshold (see Note 2). The full operational V_{DD} range for the SLG46108 is 1.71 V – 5.5 V (1.8 V $\pm$ 5 % - 5 V $\pm$ 10 %). This means that the V_{DD} voltage must ramp up to the operational voltage value, but the POR sequence will start earlier, as soon as the V_{DD} voltage rises to the power-on threshold. After the POR sequence has started, the SLG46108 will have a typical period of time to go through all the steps in the sequence (noted in the datasheet for that device), and will be ready and completely operational after the POR sequence is complete.

The SLG46108 is guaranteed to be powered down and non-operational when the V_{DD} voltage (voltage on Pin 1) is less than 0.6 V, but not less than -0.6 V. Another essential condition for the chip to be powered down is that no voltage higher (see Note 1) than the V_{DD} voltage is applied to any other pin. For example, if V_{DD} voltage is 0.3 V, applying a voltage higher than 0.3 V to any other pin is incorrect, and can lead to incorrect or unexpected device behavior.

Note 1. There is a 0.5 V margin due to forward drop voltage of the ESD protection diodes.

Note 2. The power-on threshold can vary by PVT, but typically it is 1.6 V.

To power down the chip, the V_{DD} voltage should be lower than the operational, and to guarantee that the chip is powered down, it should be less than 0.6 V.

All pins are in high impedance state when the chip is powered down and while the POR sequence is taking place. The last step in the POR sequence releases the IO structures from the high impedance state, at which time the device is operational. The pin configuration at this point in time is defined by the design programmed into the chip. Also, as it was mentioned before, the voltage on pins cannot be bigger than the V_{DD} , this rule also applies to the case when the chip is powered on.

13.2 POR Sequence

The POR system generates a sequence of signals that enable certain macrocells. The sequence is shown in *Figure 34*.

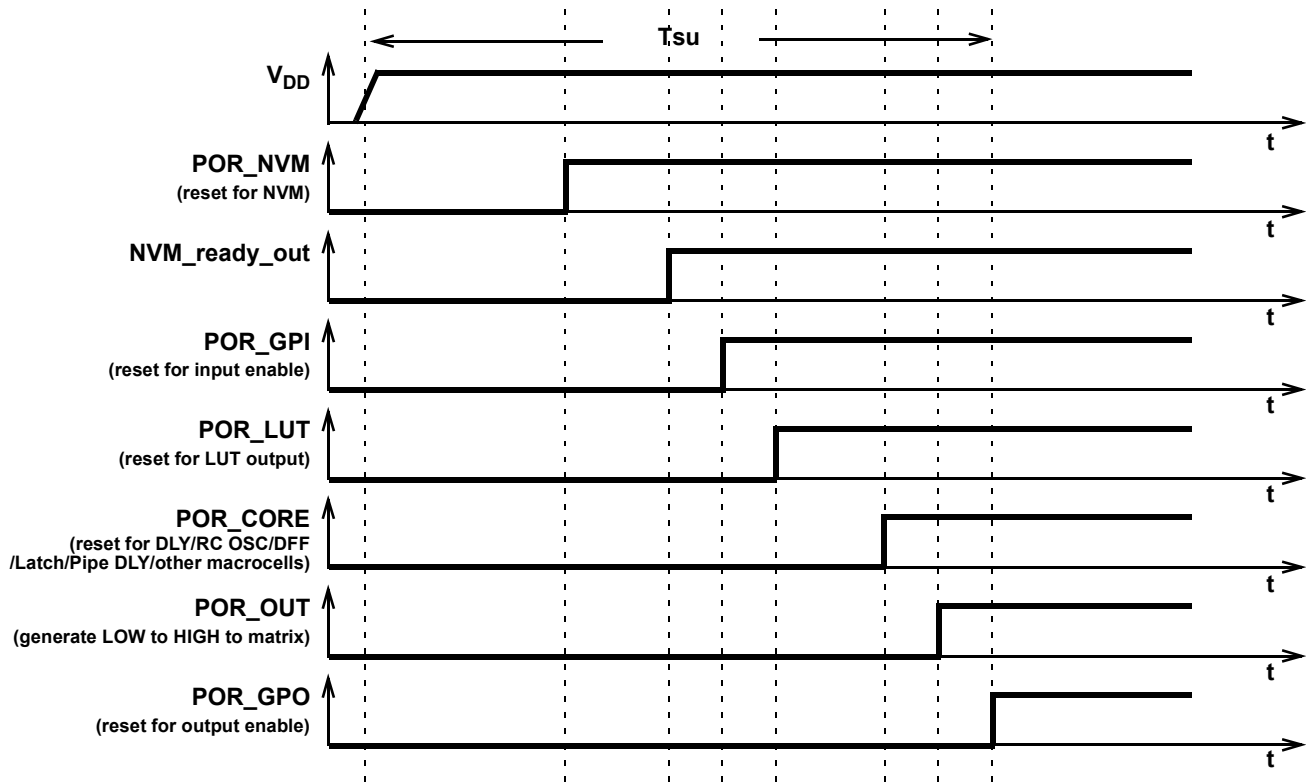


Figure 34. POR Sequence

As can be seen from *Figure 34*, after the V_{DD} started ramping up and crossed the power-on threshold, first, the on-chip NVM memory is reset. Next, the chip reads the data from NVM and transfers this information to SRAM registers that serve to configure each macrocell and the Connection Matrix, which routes signals between macrocells. The third stage causes the reset of the input pins and then enables them. After that, the LUTs are reset and become active. After LUTs, the Delay cells, RC OSC, DFFs, Latches, and Pipe Delay are initialized. Only after all macrocells are initialized, internal POR signal (POR macrocell output) goes from LOW to HIGH. The last portion of the device to be initialized are the output pins, which transition from high impedance to active at this point.

The typical time that takes to complete the POR sequence varies by device type in the GreenPAK family. It also depends on many environmental factors, such as: slew rate, V_{DD} value, temperature, and even varies from chip to chip (process influence).

13.3 Macrocells Output States During POR Sequence

To have a full picture of the SLG46108 operation during powering and POR sequence, review the overview of the macrocell output states during the POR sequence (*Figure 35.* describes the output signals states).

First, before the NVM is reset, all macrocells have their output set to logic LOW (except the output pins, which are in high impedance state). Before the NVM is ready, all macrocell outputs are unpredictable (except the output pins). On the next step, some of the macrocells start initialization: input pins output state becomes LOW; LUTs also output LOW. Only P DLY macrocell configured as edge detector becomes active at this time. After that, input pins are enabled. Next, only LUTs are configured. Next, all other macrocells are initialized. After macrocells are initialized, internal POR matrix signal switches from LOW to HIGH. The last are output pins that become active and determined by the input signals.

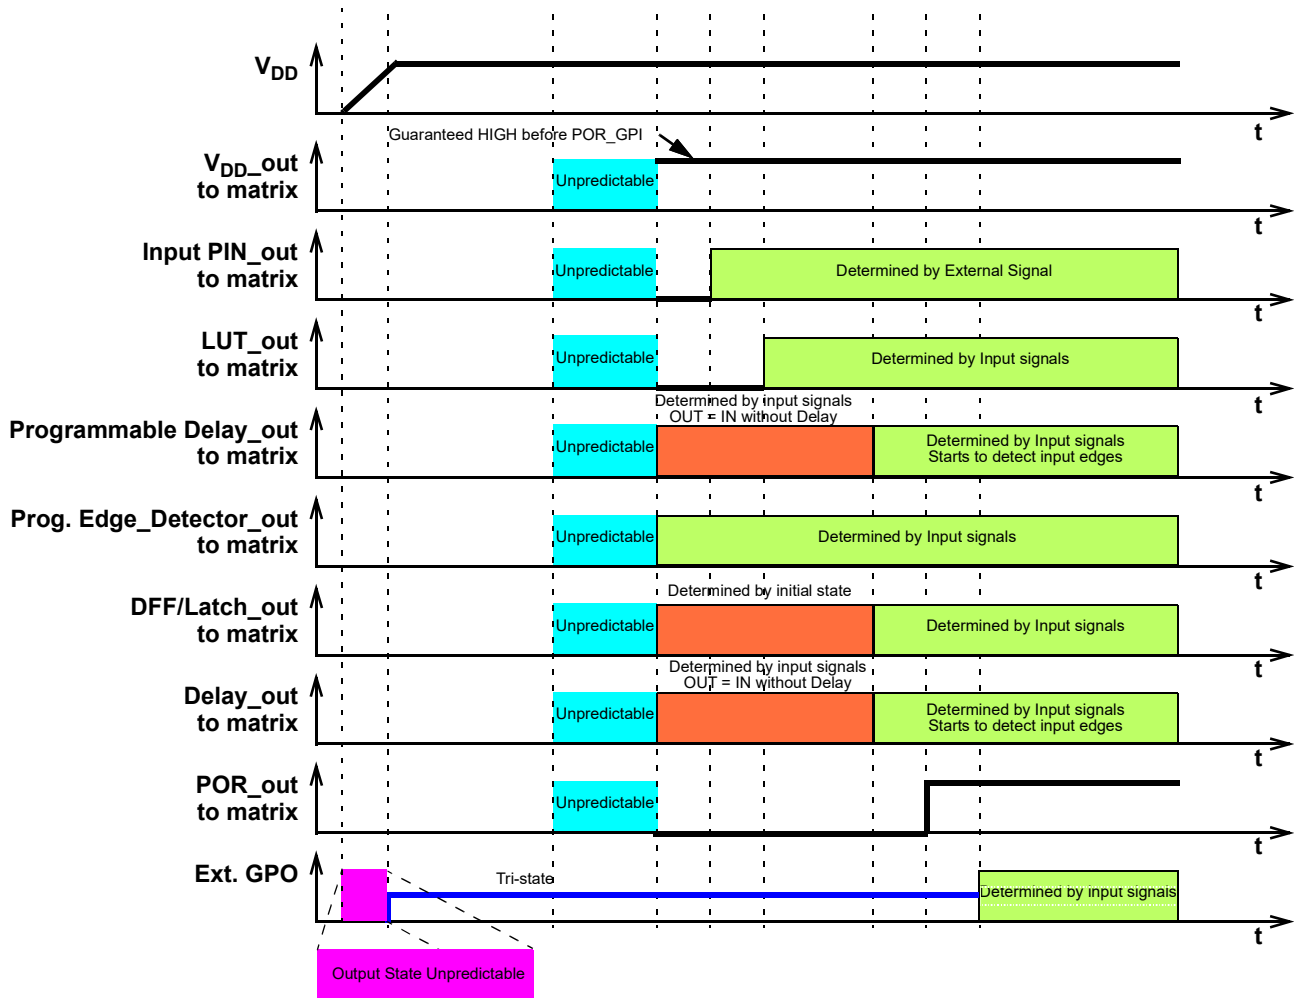


Figure 35. Internal Macrocell States during POR Sequence

14.0 Appendix A - SLG46108 Register Definition

Register Bit Address	Signal Function	Register Bit Definition
reg <4:0>	Pin 3 digital out source	
reg <9:5>	Pin 4 digital out source	
reg <14:10>	Pin 4 output enable	
reg <19:15>	In0 of 2-bit LUT0 (Clock Input of DFF0)	
reg <24:20>	In1 of 2-bit LUT0 (Data Input of DFF0)	
reg <29:25>	In0 of 2-bit LUT1 (Clock Input of DFF1)	
reg <34:30>	In1 of 2-bit LUT1 (Data Input of DFF1)	
reg <39:35>	In0 of 2-bit LUT2	
reg <44:40>	In1 of 2-bit LUT2	
reg <49:45>	In0 of 2-bit LUT3	
reg <54:50>	In1 of 2-bit LUT3	
reg <59:55>	In0 of 3-bit LUT0 (Clock Input of DFF2 with nReset/nSet)	
reg <64:60>	In1 of 3-bit LUT0 (Data input of DFF2 with nReset/nSet)	
reg <69:65>	In2 of 3-bit LUT0 (Resetb or Setb of DFF2 with nReset/nSet)	
reg <74:70>	In0 of 3-bit LUT1 (Clock Input of DFF3 with nReset/nSet)	
reg <79:75>	In1 of 3-bit LUT1 (Data input of DFF3 with nReset/nSet)	
reg <84:80>	In2 of 3-bit LUT1 (Resetb or Setb of DFF3 with nReset/nSet)	
reg <89:85>	In0 of 3-bit LUT2	
reg <94:90>	In1 of 3-bit LUT2	
reg <99:95>	In2 of 3-bit LUT2	
reg <104:100>	In0 of 3-bit LUT3	
reg <109:105>	In1 of 3-bit LUT3	
reg <114:110>	In2 of 3-bit LUT3	
reg <119:115>	In0 of 3-bit LUT4 (Input of Pipe Delay)	
reg <124:120>	In1 of 3-bit LUT4 (Resetb of Pipe Delay)	
reg <129:125>	In2 of 3-bit LUT4 (Clock of Pipe Delay)	
reg <134:130>	In0 of 4-bit LUT0 (Input for Delay2 external clock or Counter2 external Clock)	
reg <139:135>	In1 of 4-bit LUT0 (Input for Delay2 or Counter2 reset input)	
reg <144:140>	In2 of 4-bit LUT0 (Input for Counter2 FSM keep signal)	
reg <149:145>	In3 of 4-bit LUT0 (Input for Counter2 FSM up signal)	
reg <154:150>	Input for Delay0 or Counter0 reset input	
reg <159:155>	Input for Delay1 or Counter1 reset input	
reg <164:160>	Input for Delay0/1(Counter0/1) external clock	
reg <169:165>	Input for Delay3 or Counter3 reset input	
reg <174:170>	Input for programmable delay (deglitch filter input)	
reg <179:175>	Power-down for Oscillator (higher priority) (HIGH = power-down)	
reg <184:180>	Pin 6 digital out source	
reg <189:185>	Pin 7 digital out source	
reg <194:190>	Pin 8 digital out source	
reg <199:195>	Pin 8 output enable	

Register Bit Address	Signal Function	Register Bit Definition
reg <207:200>	Reserved	
2-bit LUT		
reg <208>	DFF0 or Latch select/2-bit LUT0 <0>	0: DFF function 1: Latch function
reg <209>	2-bit LUT0 <1>	
reg <210>	DFF0 initial polarity select/2-bit LUT0 <2>	0: LOW 1: HIGH
reg <211>	2-bit LUT0 <3>	
reg <212>	DFF1 or Latch select/2-bit LUT1 <0>	0: DFF function 1: Latch function
reg <213>	2-bit LUT1 <1>	
reg <214>	DFF1 initial polarity select/2-bit LUT1 <2>	0: LOW 1: HIGH
reg <215>	2-bit LUT1 <3>	
reg <219:216>	2-bit LUT2 data	
reg <223:220>	2-bit LUT3 data	
reg <224>	2-bit LUT0 or DFF/Latch_0 select	0: 2-bit LUT0 1: DFF4
reg <225>	2-bit LUT1 or DFF/Latch_1 select	0: 2-bit LUT1 1: DFF5
3-bit LUT		
reg <226>	DFF2 or Latch select/3-bit LUT0 <1>	0: DFF function 1: Latch function
reg <227>	3-bit LUT0 <2>	
reg <228>	DFF2 rstb/setb select/3-bit LUT0 <3>	0: rstb from matrix output 1: setb from matrix output
reg <229>	DFF2 initial polarity select/3-bit LUT0 <4>	0: LOW 1: HIGH
reg <233:230>	3-bit LUT0 <7:5>	
reg <234>	DFF3 or Latch select/3-bit LUT1 <1>	0: DFF function 1: Latch function
reg <235>	3-bit LUT1 <2>	
reg <236>	DFF3 rstb/setb select/3-bit LUT1 <3>	0: rstb from matrix output 1: setb from matrix output
reg <237>	DFF3 initial polarity select/3-bit LUT1 <4>	0: LOW 1: HIGH
reg <241:238>	3-bit LUT1 <7:5>	
reg <249:242>	3-bit LUT2 data	
reg <257:250>	3-bit LUT3 data	
reg <265:258>	3-bit LUT4 data or pipe number select	reg<260:258>: OUT0 select reg<263:261>: OUT1 select
reg <266>	3-bit LUT0 or DFF/Latch_2 (with nReset/nSet) select	0: 3-bit LUT0 1: DFF2
reg <267>	3-bit LUT1 or DFF/Latch_3 (with nReset/nSet) select	0: 3-bit LUT1 1: DFF3
reg <268>	3-bit LUT4 or Pipe Delay select	0: 3-bit LUT4 1: Pipe Delay

Register Bit Address	Signal Function	Register Bit Definition
4-bit LUT		
reg <284:269>	4-bit LUT0 data or:	
reg <269>	Counter/Delay2 mode selection	0: Delay Mode 1: Counter Mode
reg <272:270>	Counter/Delay2 Clock Source select	000: Internal OSC Clock 001: OSC/4 010: OSC/12 011: OSC/24 100: OSC/64 101: External Clock 110: Reserved 111: Counter1 Overflow
reg <280:273>	Counter/Delay2 Control Data	1-255: (delay time = (counter data + 2 + variable)/freq), where 0 < variable < 1
reg <282:281>	Delay2 Mode Select or asynchronous counter reset	00: on both falling and rising edges (for delay and counter reset) 01: on falling edge only (for delay and counter reset) 10: on rising edge only (for delay and counter reset) 11: no delay on either falling or rising edges/high level reset for counter mode
reg <283>	Counter2/FSM2's Q are set to Data or Reset to 0s selection	0: reset to 0 1: set to data
reg <285>	4-bit LUT0 or counter_2 select	0: 4-bit LUT0 1: Counter2
OSC		
reg <286>	Force Oscillator on	0: Auto Power-on 1: Force Power-on
reg <287>	Oscillator frequency control	0: 25 k 1: 2 M
reg <289:288>	Oscillator clock pre-divider	00: div1 01: div2 10: div4 11: div8
reg <292:290>	Internal Oscillator divider frequency control 1	000: OSC/1 001: OSC/2 010: OSC/3 011: OSC/4 100: OSC/8 101: OSC/12 110: OSC/24 111: OSC/64
reg <295:293>	Internal Oscillator divider frequency control 2	000: OSC/1 001: OSC/2 010: OSC/3 011: OSC/4 100: OSC/8 101: OSC/12 110: OSC/24 111: OSC/64
reg <296>	External Clock Source Select	0: Internal Oscillator 1: External Clock from Pin 8

Register Bit Address	Signal Function	Register Bit Definition
reg <297>	Reserved	
reg <298>	OSC Clock 25 kHz/2 MHz to matrix input <20> enable	0: Disable 1: Enable
reg <299>	OSC Clock 25 kHz/2 MHz to matrix input <21> enable	0: Disable 1: Enable
reg <300>	OSC Fast Start-Up Enable for 25 kHz/2 MHz	0: Disable 1: Enable
CNT/DLY		
reg <301>	Counter/Delay0 (8-bit) mode select	0: Delay mode 1: Counter mode
reg <302>	Reserved	
reg <305:303>	Counter/Delay0 Clock Source select	000: Internal OSC Clock 001: OSC/4 010: OSC/12 011: OSC/24 100: OSC/64 101: External Clock 110: Reserved 111: Counter3 Overflow
reg <313:306>	Counter0 Control Data/Delay0 Time Control	1-255: (delay time = (counter data + 2 + variable)/freq), where 0 < variable < 1
reg <315:314>	Delay0 Mode Select or asynchronous counter reset	00: on both falling and rising edges (for delay and counter reset) 01: on falling edge only (for delay and counter reset) 10: on rising edge only (for delay and counter reset) 11: no delay on either falling or rising edges/high level reset for counter mode
reg <317:316>	Reserved	
reg <318>	Counter/Delay1 (8-bit) mode select	0: Delay mode 1: Counter mode
reg <319>	Reserved	
reg <322:320>	Counter/Delay1 Clock Source select (external clock is only for counter mode)	000: Internal OSC Clock 001: OSC/4 010: OSC/12 011: OSC/24 100: OSC/64 101: External Clock 110: Reserved 111: Counter0 Overflow
reg <330:323>	Counter1 Control Data/Delay1 Time Control	1-255: (delay time = (counter data + 2 + variable)/freq), where 0 < variable < 1
reg <332:331>	Delay1 Mode Select or asynchronous counter reset	00: on both falling and rising edges (for delay and counter reset) 01: on falling edge only (for delay and counter reset) 10: on rising edge only (for delay and counter reset) 11: no delay on either falling or rising edges/high level reset for counter mode


Register Bit Address	Signal Function	Register Bit Definition
reg <334:333>	Reserved	
reg <335>	Counter/Delay3 (8-bit) mode select	0: Delay mode 1: Counter mode
reg <338:336>	Counter/Delay3 Clock Source select (external clock is only for counter mode)	000: Internal OSC Clock 001: OSC/4 010: OSC/12 011: OSC/24 100: OSC/64 101: External Clock 110: Reserved 111: Counter2 Overflow
reg <346:339>	Counter3 Control Data/Delay3 Time Control	1-255: (delay time = (counter data + 2 + variable)/freq), where 0 < variable < 1
reg <348:347>	Delay3 Mode Select	00: delay on both falling and rising edges 01: delay on falling edge only 10: delay on rising edge only 11: no delay on either falling or rising edges
Pin 2		
reg <350:349>	Pin 2 Mode control	00: Digital Input without Schmitt trigger 01: Digital Input with Schmitt trigger 10: Low Voltage Digital Input 11: Reserved
reg <352:351>	Pin 2 Pull-down resistor value selection	00: Floating 01: 10 k 10: 100 k 11: 1 M
Pin 3		
reg <355:353>	Pin 3 Mode control	000: Digital Input without Schmitt trigger 001: Digital Input with Schmitt trigger 010: Low Voltage Digital Input 011: Reserved 100: Push-Pull 101: Open-Drain NMOS 110: Open-Drain PMOS 111: Reserved
reg <357:356>	Pin 3 Pull-up/down resistor value selection	00: Floating 01: 10 k 10: 100 k 11: 1 M
reg <358>	Pin 3 Pull-up/down resistor enable	0: Pull-down resistor enable 1: Pull-up resistor enable
reg <359>	Pin 3 Driver strength selection	0: 1X 1: 2X
Pin 4		
reg <361:360>	Pin 4 Mode control (sig_pin4_oe = 0)	00: Digital Input without Schmitt trigger 01: Digital Input with Schmitt trigger 10: Low Voltage Digital Input 11: Reserved
reg <363:362>	Pin 4 Mode control (sig_pin4_oe = 1)	00: Push-Pull 1X 01: Push-Pull 2X 10: Open-Drain NMOS 1X 11: Open-Drain NMOS 2X

Register Bit Address	Signal Function	Register Bit Definition
reg <365:364>	Pin 4 Pull-up/down resistor value selection	00: Floating 01: 10 k 10: 100 k 11: 1 M
reg <366>	Pin 4 Pull-up/down resistor enable	0: Pull-down resistor enable 1: Pull-up resistor enable
reg <367>	Reserved	
Pin 6		
reg <370:368>	Pin 6 Mode control	000: Digital Input without Schmitt trigger 001: Digital Input with Schmitt trigger 010: Low Voltage Digital Input 011: Reserved 100: Push-Pull 101: Open-Drain NMOS 110: Open-Drain PMOS 111: Reserved
reg <372:371>	Pin 6 Pull-up/down resistor value selection	00: Floating 01: 10 k 10: 100 k 11: 1 M
reg <373>	Pin 6 Pull-up/down resistor enable	0: Pull-down resistor enable 1: Pull-up resistor enable
reg <374>	Pin 6 Driver strength selection	0: 1X 1: 2X
Pin 7		
reg <377:375>	Pin 7 Mode control	000: Digital Input without Schmitt trigger 001: Digital Input with Schmitt trigger 010: Low Voltage Digital Input 011: Reserved 100: Push-Pull 101: Open-Drain NMOS 110: Open-Drain PMOS 111: Reserved
reg <379:378>	Pin 7 Pull-up/down resistor value selection	00: Floating 01: 10 k 10: 100 k 11: 1 M
reg <380>	Pin 7 Pull-up/down resistor enable	0: Pull-down resistor enable 1: Pull-up resistor enable
reg <381>	Pin 7 Driver strength selection	0: 1X 1: 2X
Pin 8		
reg <383:382>	Pin 8 Mode control (sig_pin8_oe = 0)	00: Digital Input without Schmitt trigger 01: Digital Input with Schmitt trigger 10: Low Voltage Digital Input 11: Reserved
reg <385:384>	Pin 8 Mode control (sig_pin8_oe = 1)	00: Push-Pull 1X 01: Push-Pull 2X 10: Open-Drain NMOS 1X 11: Open-Drain NMOS 2X

Register Bit Address	Signal Function	Register Bit Definition
reg <387:386>	Pin 8 Pull-up/down resistor value selection	00: Floating 01: 10 k 10: 100 k 11: 1 M
reg <388>	Pin 8 Pull-up/down resistor enable	0: Pull-down resistor enable 1: Pull-up resistor enable
reg <390:389>	Reserved	
Quick Charge		
reg <391>	GPIO quick charge enable	0: Disable 1: Enable
Pipe Delay		
reg <392>	Pipe Delay OUT1 polarity select bit	0: Non-inverted 1: Inverted
Pattern ID		
reg <400:393>	8-bit pattern id	
Deglitch Filter		
reg <401>	Deglitch filter out polarity selection	0: Non-inverted 1: Inverted
Misc.		
reg <402>	NVM data read disable	0: Disable (read enable) 1: Enable (read disable)
reg <403>	NVM power-down (or NVM data programming disable)	0: None (or programming enable) 1: Power-Down (or programming disable)
reg <405:404>	Reserved	
reg <406>	Reserved	
reg <407>	Reserved	
PGM Delay and Edge Detector		
reg <408>	Pin 2 Edge Detect Mode	0: Rising edge 1: Falling edge
reg <409>	Pin 2 Bypass the pin2	0: Pin 2 edge active 1: Pin 2 HIGH active
reg <410>	Pin 2 Reset enable	0: Disable 1: Enable
reg <411>	Programmable delay or filter output select	0: Programmable delay output 1: Filter output
reg <413:412>	Select the edge mode of programmable delay with edge detector	00: Rising edge detector 01: Falling edge detector 10: Both edge detector 11: Both edge delay
reg <415:414>	Delay value select for programmable delay and edge detector ($V_{DD} = 3.3\text{ V}$, typical condition)	00: 135 ns 01: 270 ns 10: 405 ns 11: 540 ns
reg <423:416>	Reserved	
reg <431:424>	Reserved	
reg <437:432>	Reserved	
reg <439:438>	Reserved	
reg <445:440>	Reserved	

Register Bit Address	Signal Function	Register Bit Definition
reg <447:446>	Reserved	
reg <448>	Reserved	
reg <449>	Reserved	
reg <450>	Reserved	
reg <451>	Reserved	
reg <455:452>	Reserved	
reg <463:456>	Reserved	

15.0 Package Top Marking System Definition

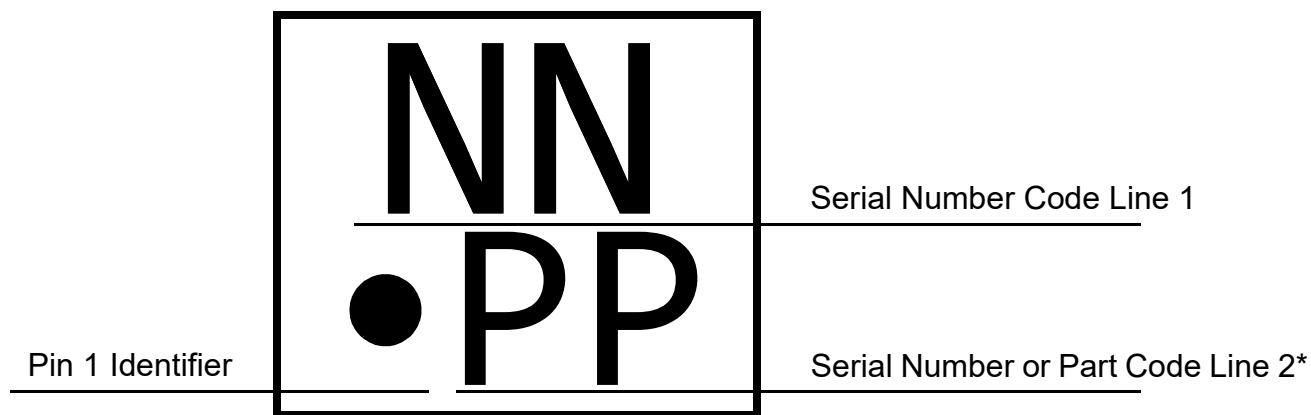


* PP may consist of the special characters +, -, and = for a total of 9 different combinations, or may consist of two character alphanumeric Part Code (A-Z and 0-9), depending on time of marking.

Note: The SN Code (Line 1 and Line 2) is generated during production and encodes information including part number, programming code number, date code, and lot code. This same information is provided in plain text form on a label placed on the reel. If you need assistance in decoding the SN Code, please contact Renesas Electronics Corporation.

16.0 Package Drawing and Dimensions

8 Lead STQFN Package 1.0 x 1.2 mm
IC Net Weight: 0.0017 g

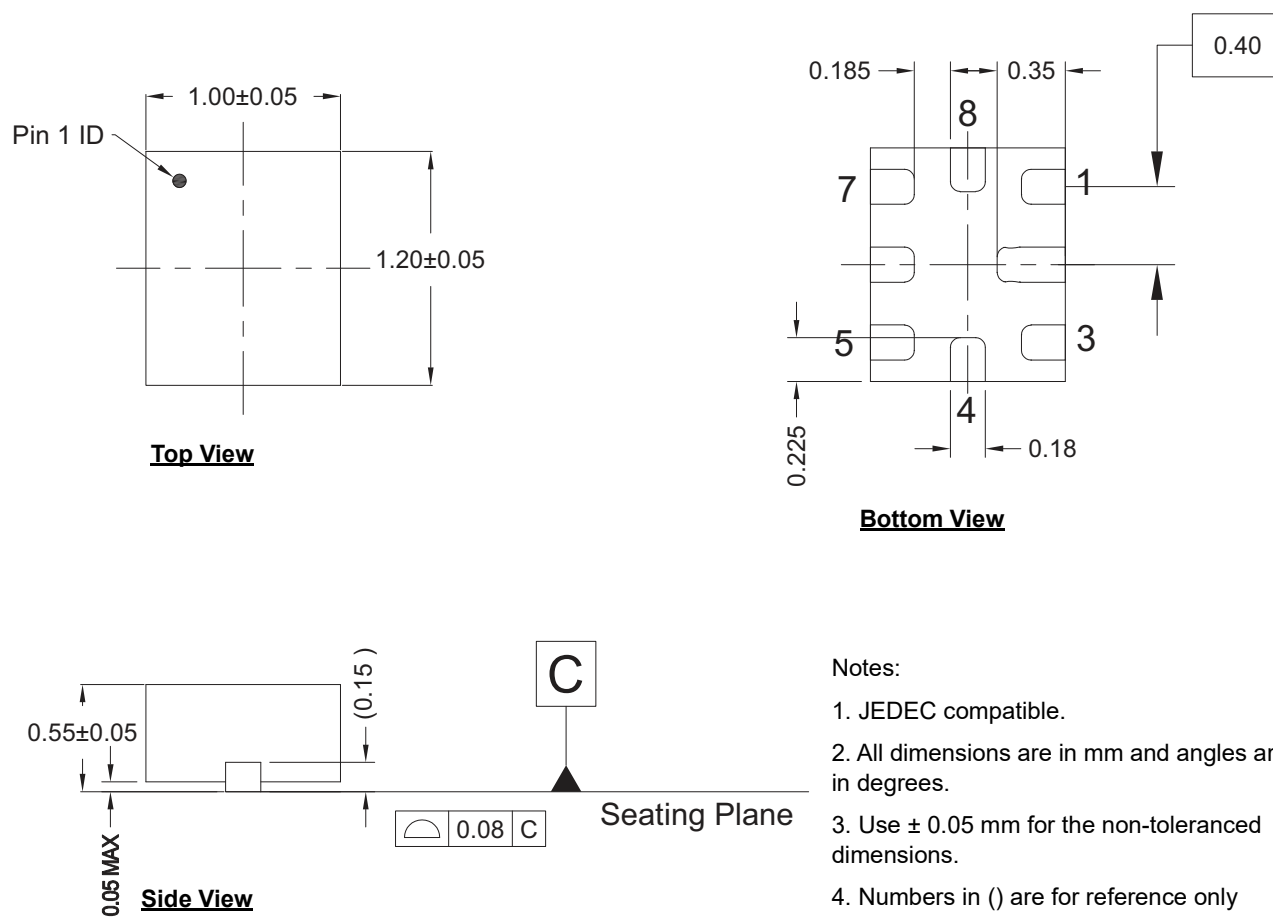


17.0 Tape and Reel Specifications


Package Type	# of Pins	Nominal Package Size [mm]	Max Units		Reel & Hub Size [mm]	Leader (min)		Trailer (min)		Tape Width [mm]	Part Pitch [mm]
			per Reel	per Box		Pockets	Length [mm]	Pockets	Length [mm]		
STQFN 8L 0.4P FC Green	8	1.0x1.2x0.55	3000	3000	178/60	100	400	100	400	8	4

17.1 Carrier Tape Drawing and Dimensions

Package Type	PocketBTM Length [mm]	PocketBTM Width [mm]	Pocket Depth [mm]	Index Hole Pitch [mm]	Pocket Pitch [mm]	Index Hole Diameter [mm]	Index Hole to Tape Edge [mm]	Index Hole to Pocket Center [mm]	Tape Width [mm]
	A0	B0	K0	P0	P1	D0	E	F	W
STQFN 8L 0.4P FC Green	1.16	1.38	0.71	4	4	1.5	1.75	3.5	8

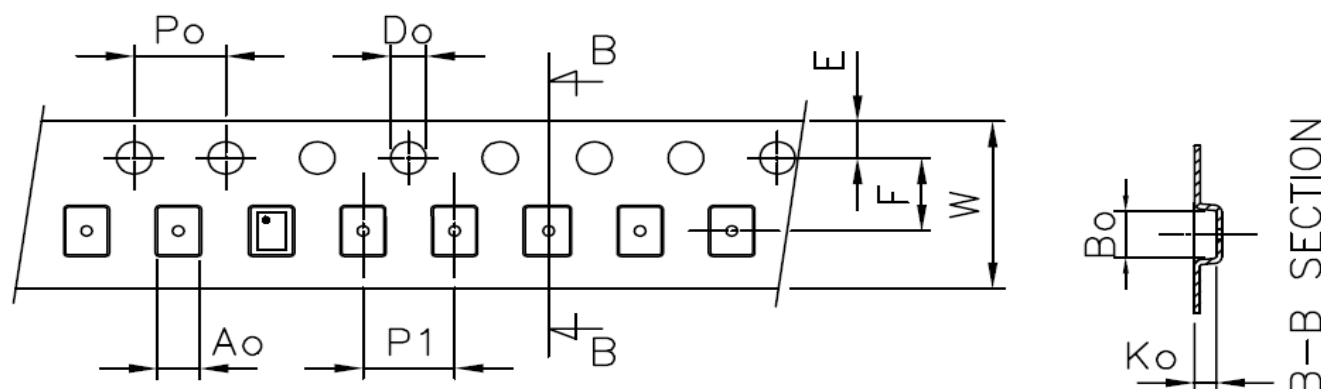

18.0 Recommended Land Pattern

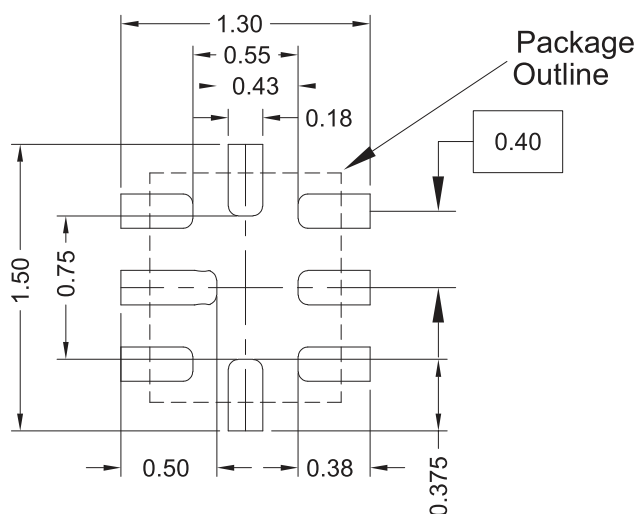

Unit: mm

19.0 Recommended Reflow Soldering Profile

Please see IPC/JEDEC J-STD-020: latest revision for reflow profile based on package volume of 0.66 mm³ (nominal). More information can be found at www.jedec.org.

20.0 Revision History

Date	Version	Change
10/24/2025	1.17	Updated figure Internal Macrocell States during POR Sequence Updated Recommended Land Pattern Updated Package Drawing and Dimensions
5/9/2025	1.16	Fixed typos Updated LUT block names to match with Go Configure™ Software Hub Added Register Bit Definition for Register Bit Addresses reg <298>, reg <299>, reg <300> in Appendix A - SLG46108 Register Definition table Updated format of Pin Configuration and Block Diagram figures Updated information in section RC Oscillator (RC OSC)
8/14/2023	1.15	Updated tables Electrical Characteristics Fixed typos
3/9/2023	1.14	Added notes to section Ordering Information
3/4/2022	1.13	Updated R _{PUP} and R _{PDWN} in section Electrical Specifications Renesas rebranding Updated tables CNT/DLY Register Settings Corrected registers [280:273], [313:306], [330:323], [346:339] in Appendix A - SLG46108 Register Definition
8/25/2020	1.12	Updated figure Internal Macrocell States during POR sequence Added note for CNTs Corrected registers [346:336], [330:320], [313:303], [280:270]
7/11/2019	1.11	Corrected Absolute Maximum Conditions Corrected Appendix A Fixed typos
11/13/2018	1.10	Updated to Dialog style Updated Marking Spec Fixed typos
5/10/2018	1.09	Fixed typos
10/27/2017	1.08	Updated OSC Electrical Spec
10/9/2017	1.07	Updated Electrical Spec Fixed typos
8/10/2017	1.06	Fixed typos
7/28/2017	1.05	Corrected Pin Structure Diagrams Fixed typos
7/5/2017	1.04	Fixed typos Updated Silego Website & Support Updated Section Programmable Delay / Edge Detector Updated Landing Pattern Updated Electrical Spec
8/31/2016	1.03	Updated OSC Specifications
7/27/2016	1.02	Updated Programmable Delay for clarification Clarified Electrical Characteristics Table conditions Simplified IDD Estimator table Fixed RC Oscillator descriptions Added Note to Package Marking
7/1/2016	1.01	Final clean up
6/15/2016	1.00	Production Release
5/19/2016	0.50	Preliminary Release

IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES ("RENESAS") PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD-PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers who are designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only to develop an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third-party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising from your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Disclaimer Rev.1.01)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit www.renesas.com/contact-us/.

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.