

Rochester Electronics Manufactured Components

Rochester branded components are manufactured using either die/wafers purchased from the original suppliers or Rochester wafers recreated from the original IP. All recreations are done with the approval of the OCM.

Parts are tested using original factory test programs or Rochester developed test solutions to guarantee product meets or exceed the OCM data sheet.

Quality Overview

- ISO-9001
- AS9120 certification
- Qualified Manufacturers List (QML) MIL-PRF-35835
 - Class Q Military
 - Class V Space Level
- Qualified Suppliers List of Distributors (QSLD)
 - Rochester is a critical supplier to DLA and meets all industry and DLA standards.

Rochester Electronics, LLC is committed to supplying products that satisfy customer expectations for quality and are equal to those originally supplied by industry manufacturers.

The original manufacturer's datasheet accompanying this document reflects the performance and specifications of the Rochester manufactured version of this device. Rochester Electronics guarantees the performance of its semiconductor products to the original OEM specifications. 'Typical' values are for reference purposes only. Certain minimum or maximum ratings may be based on product characterization, design, simulation, or sample testing.

FEATURES

Enhanced system-level ESD performance per IEC 61000-4-x

High temperature operation: 125°C

Default low output

Narrow body, RoHS-compliant, 8-lead SOIC

Low power operation

5 V operation

1.7 mA per channel maximum at 0 Mbps to 2 Mbps

3.7 mA per channel maximum at 10 Mbps

7.0 mA per channel maximum at 25 Mbps

3 V operation

1.5 mA per channel maximum at 0 Mbps to 2 Mbps

2.5 mA per channel maximum at 10 Mbps

4.7 mA per channel maximum at 25 Mbps

3 V/5 V level translation

High data rate: dc to 25 Mbps (NRZ)

Precise timing characteristics

3 ns maximum pulse width distortion at 5 V operation

3 ns maximum channel-to-channel matching

High common-mode transient immunity: >25 kV/μs

Safety and regulatory approvals

UL recognition: 2500 V rms for 1 minute per UL 1577

CSA Component Acceptance Notice #5A

VDE certificate of conformity

DIN V VDE V 0884-10 (VDE V 0884-10):2006-12

$V_{ORM} = 560$ V peak

Qualified for automotive applications

APPLICATIONS

Size-critical multichannel isolation

SPI interface/data converter isolation

RS-232/RS-422/RS-485 transceiver isolation

Digital field bus isolation

Gate drive interfaces

Hybrid electric vehicles, battery monitor, and motor drive

GENERAL DESCRIPTION

The [ADuM3210/ADuM3211](#)¹ are dual-channel digital isolators based on Analog Devices, Inc., iCoupler® technology. Combining high speed CMOS and monolithic transformer technology, this isolation component provides outstanding performance characteristics superior to alternatives such as optocoupler devices.

By avoiding the use of LEDs and photodiodes, iCoupler devices remove the design difficulties commonly associated with optocouplers. The typical optocoupler concerns regarding uncertain current transfer ratios, nonlinear transfer functions, and temperature and lifetime effects are eliminated with the simple iCoupler digital interfaces and stable performance characteristics. The need for external drivers and other discrete components is eliminated with these iCoupler products. Furthermore, iCoupler devices consume one-tenth to one-sixth the power of optocouplers at comparable signal data rates.

The [ADuM3210/ADuM3211](#) isolators provide two independent isolation channels in two channel configurations with data rates up to 25 Mbps (see the Ordering Guide). They operate with 3.3 V or 5 V supply voltages on either side, providing compatibility with lower voltage systems, as well as enabling voltage translation functionality across the isolation barrier. The [ADuM3210/ADuM3211](#) isolators have a default output low characteristic in comparison to the [ADuM3200/ADuM3201](#) models, which have a default output high characteristic. The [ADuM3210W](#) and [ADuM3211W](#) models are automotive grade versions qualified for 125°C operation.

In comparison to the [ADuM120x](#) isolator, the [ADuM3210/ADuM3211](#) isolators contain various circuit and layout changes providing increased capability relative to system-level IEC 61000-4-x testing (ESD, burst, and surge). The precise capability in these tests for either the [ADuM120x](#) or [ADuM3210/ADuM3211](#) products is strongly determined by the design and layout of the user's board or module. For more information, see the [AN-793 Application Note, ESD/Latch-Up Considerations with iCoupler Isolation Products](#).

FUNCTIONAL BLOCK DIAGRAMS

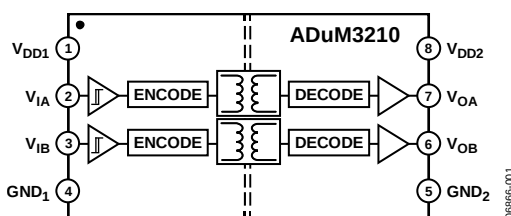


Figure 1. [ADuM3210](#)

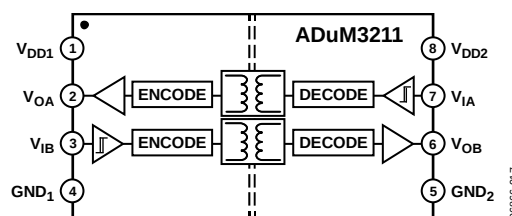


Figure 2. [ADuM3211](#)

¹ Protected by U.S. Patents 5,952,849; 6,873,065; and 7,075,239.

Rev. G

Document Feedback

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

TABLE OF CONTENTS

Features	1	Insulation and Safety-Related Specifications.....	12
Applications.....	1	Insulation Characteristics (DIN V VDE V 0884-10 (VDE V 0884-10):2006-12).....	13
General Description	1	Recommended Operating Conditions	13
Functional Block Diagrams.....	1	Absolute Maximum Ratings	14
Revision History	3	ESD Caution.....	14
Specifications.....	4	Pin Configurations and Function Descriptions	15
Electrical Characteristics—5 V, 105°C Operation	4	Truth Tables.....	15
Electrical Characteristics—3 V, 105°C Operation	5	Typical Performance Characteristics	16
Electrical Characteristics—Mixed 5 V/3 V, 105°C Operation.....	6	Applications Information	17
Electrical Characteristics—Mixed 3 V/5 V, 105°C Operation.....	7	PC Board Layout	17
Electrical Characteristics—5 V, 125°C Operation	8	System-Level ESD Considerations and Enhancements	17
Electrical Characteristics—3 V, 125°C Operation	9	Propagation Delay-Related Parameters.....	17
Electrical Characteristics—Mixed 5 V/3 V, 125°C Operation.....	10	DC Correctness and Magnetic Field Immunity.....	17
Electrical Characteristics—Mixed 3 V/5 V, 125°C Operation.....	11	Power Consumption	18
Package Characteristics	12	Insulation Lifetime	19
Regulatory Information.....	12	Outline Dimensions	20
		Ordering Guide	21
		Automotive Products.....	21

REVISION HISTORY**11/12—Rev. F to Rev. G**

Changes to Table Summary Statement, Electrical Characteristics—3 V, 105°C Operation Section.....	5
Changes to Table Summary Statement, Electrical Characteristics—Mixed 5 V/3 V, 105°C Operation Section.....	6
Changes to Table Summary Statement, Electrical Characteristics—Mixed 3 V/5 V, 105°C Operation Section.....	7
Changes to Column Headings, Table 13, Table 14, Table 15.....	8
Changes to Column Headings, Table 16, Table 17, Table 18.....	9
Changes to Column Headings, Table 19, Table 20, Table 21.....	10
Changes to Column Headings, Table 22, Table 23, Table 24.....	11
Changes to Table 29.....	13
Changes to Table 32 and Table 33.....	15
Change to PC Board Layout Section.....	17

2/12—Rev. E to Rev. F

Created Hyperlink for Safety and Regulatory Approvals Entry in Features Section.....	1
Change to PC Board Layout Section.....	16

11/11—Rev. D to Rev. E

Changes to Table 1, Pulse Width Parameter.....	3
Changes to Table 4, Pulse Width Parameter.....	4
Changes to Table 7, Pulse Width Parameter.....	5
Changes to Table 10, Pulse Width Parameter.....	6

6/11—Rev. C to Rev. D

Changes to Features Section, Applications Section, and General Description Section.....	1
Changes to Propagation Delay Skew Parameter, Table 1; Opposing-Direction Parameter, Table 1; and Quiescent Output Supply Current Parameter, Table 3.....	3
Changes to Opposing-Direction Parameter, Table 4.....	4
Changes to Opposing-Direction Parameter, Table 7 and Logic Low Input Threshold Parameter, Table 9.....	5

Changes to Propagation Delay Skew Parameter, Table 10 and Changes to Table 12.....	6
Changes to Table 13, Table 14, and Quiescent Output Supply Current Parameter, Table 15.....	7
Changes to Table 16 and Table 17.....	8
Changes to Table 19, Table 20, and Logic Low Input Threshold Parameter, Table 21.....	9
Changes to Table 22, Table 23, and Table 24.....	10
Changes to Side 1 Current Parameter, Table 28; Side 2 Current Parameter, Table 28; and Table 29.....	12
Changes to Ambient Operating Temperature, Table 30 and Average Output Current per Pin, Table 30.....	13
Changes to Figure 9, Figure 10, and Figure 11 Captions.....	15
Changes to Ordering Guide.....	20
Added Automotive Products Section.....	20

9/09—Rev. B to Rev. C

Added ADuM3210A and ADuM3211A.....	Throughout
Changes to General Description Section.....	1
Reformatted Electrical Characteristics Tables.....	3
Moved Truth Tables Section.....	14
Changes to Ordering Guide.....	20

7/09—Rev. A to Rev. B

Added ADuM3211.....	Throughout
Changes to Specifications Section.....	3
Added Table 16.....	19
Added Figure 5 and Table 18.....	20
Added Figure 11.....	21
Changes to Power Consumption Section.....	23
Changes to Ordering Guide.....	25

9/08—Revision A: Initial Version

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS—5 V, 105°C OPERATION

All typical specifications are at $T_A = 25^\circ\text{C}$, $V_{DD1} = V_{DD2} = 5\text{ V}$. Minimum/maximum specifications apply over the entire recommended operation range: $4.5\text{ V} \leq V_{DD1} \leq 5.5\text{ V}$, $4.5\text{ V} \leq V_{DD2} \leq 5.5\text{ V}$, and $-40^\circ\text{C} \leq T_A \leq +105^\circ\text{C}$, unless otherwise noted. Switching specifications are tested with $C_L = 15\text{ pF}$ and CMOS signal levels, unless otherwise noted.

Table 1.

Parameter	Symbol	A Grade			B Grade			Unit	Test Conditions/ Comments
		Min	Typ	Max	Min	Typ	Max		
SWITCHING SPECIFICATIONS									
Data Rate				1			10	Mbps	Within PWD limit
Propagation Delay	t_{PHL}, t_{PLH}	20		50	20		50	ns	50% input to 50% output
Pulse Width Distortion	PWD			5			3	ns	$ t_{PLH} - t_{PHL} $
Change vs. Temperature			6			5		ps/°C	
Pulse Width	PW								Within PWD limit
ADuM3210		1000			22			ns	
ADuM3211		1000			33			ns	
Propagation Delay Skew	t_{PSK}			20			18	ns	Between any two units
Channel Matching									
Codirectional	t_{PSKCD}			5			3	ns	
Opposing Directional	t_{PSKOD}			20			18	ns	
Output Rise/Fall Time	t_R/t_F		2.5			2.5		ns	10% to 90%

Table 2.

Parameter	Symbol	1 Mbps—A Grade, B Grade			10 Mbps—B Grade			Unit
		Min	Typ	Max	Min	Typ	Max	
SUPPLY CURRENT								
ADuM3210	I_{DD1}		1.3	1.7		3.5	4.6	mA
	I_{DD2}		1.0	1.6		1.7	2.8	mA
ADuM3211	I_{DD1}		1.1	1.5		2.6	3.4	mA
	I_{DD2}		1.3	1.8		3.1	4.0	mA

Table 3. For All Models

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions/Comments
DC SPECIFICATIONS						
Logic High Input Threshold	V_{IH}	$0.7 V_{DDx}$			V	$I_{Ox} = -20\text{ }\mu\text{A}$, $V_{Ix} = V_{IxH}$ $I_{Ox} = -4\text{ mA}$, $V_{Ix} = V_{IxH}$ $I_{Ox} = 20\text{ }\mu\text{A}$, $V_{Ix} = V_{IxL}$ $I_{Ox} = 4\text{ mA}$, $V_{Ix} = V_{IxL}$ $0\text{ V} \leq V_{Ix} \leq V_{DDx}$
Logic Low Input Threshold	V_{IL}	$0.3 V_{DDx}$			V	
Logic High Output Voltages	V_{OH}	$V_{DDx} - 0.1$	5.0		V	
		$V_{DDx} - 0.5$	4.8		V	
Logic Low Output Voltages	V_{OL}		0.0	0.1	V	
			0.2	0.4	V	
Input Current per Channel	I_I	-10	+0.01	+10	μA	
Supply Current per Channel						
Quiescent Input Supply Current	$I_{DDI(Q)}$		0.4	0.8	mA	
Quiescent Output Supply Current	$I_{DDO(Q)}$		0.4	0.8	mA	
Dynamic Input Supply Current	$I_{DDI(D)}$		0.19		mA/Mbps	
Dynamic Output Supply Current	$I_{DDO(D)}$		0.05		mA/Mbps	
AC SPECIFICATIONS						
Common-Mode Transient Immunity ¹	$ CM $	25	35		kV/ μs	$V_{Ix} = V_{DDx}$, $V_{CM} = 1000\text{ V}$, transient magnitude = 800 V
Refresh Rate	f_r		1.2		Mbps	

¹ $|CM|$ is the maximum common-mode voltage slew rate that can be sustained while maintaining $V_O > 0.8 V_{DD}$. The common-mode voltage slew rates apply to both rising and falling common-mode voltage edges.

ELECTRICAL CHARACTERISTICS—3 V, 105°C OPERATION

All typical specifications are at $T_A = 25^\circ\text{C}$, $V_{DD1} = V_{DD2} = 3.0\text{ V}$. Minimum/maximum specifications apply over the entire recommended operation range: $3.0\text{ V} \leq V_{DD1} \leq 3.6\text{ V}$, $3.0\text{ V} \leq V_{DD2} \leq 3.6\text{ V}$, and $-40^\circ\text{C} \leq T_A \leq +105^\circ\text{C}$, unless otherwise noted. Switching specifications are tested with $C_L = 15\text{ pF}$ and CMOS signal levels, unless otherwise noted.

Table 4.

Parameter	Symbol	A Grade			B Grade			Unit	Test Conditions/ Comments
		Min	Typ	Max	Min	Typ	Max		
SWITCHING SPECIFICATIONS									
Data Rate	t _{PHL} , t _{PLH} PWD	20		1	20		10	Mbps	Within PWD limit
Propagation Delay				60			60	ns	50% input to 50% output
Pulse Width Distortion									
ADuM3210				5			3	ns	t _{PLH} – t _{PHL}
ADuM3211			6			4	ns	t _{PLH} – t _{PHL}	
Change vs. Temperature			6			5	ps/°C		
Pulse Width	PW								Within PWD limit
ADuM3210		1000			22			ns	
ADuM3211		1000			33			ns	
Propagation Delay Skew	t _{PSK}			29			22	ns	Between any two units
Channel Matching									
Codirectional	t _{PSKCD}			5			3	ns	
Opposing Directional	t _{PSKOD}			29			20	ns	
Output Rise/Fall Time	t _R /t _F		3.0			3.0		ns	10% to 90%

Table 5.

Parameter	Symbol	1 Mbps—A Grade, B Grade			10 Mbps—B Grade			Unit
		Min	Typ	Max	Min	Typ	Max	
SUPPLY CURRENT								
ADuM3210	I _{DD1}		0.8	1.3		2.0	3.2	mA
	I _{DD2}		0.7	1.0		1.1	1.7	mA
ADuM3211	I _{DD1}		0.7	1.3		1.5	2.1	mA
	I _{DD2}		0.8	1.6		1.9	2.4	mA

Table 6. For All Models

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions/Comments
DC SPECIFICATIONS						
Logic High Input Threshold	V_{IH}	$0.7 V_{\text{DDx}}$			V	$I_{\text{Ox}} = -20\text{ }\mu\text{A}$, $V_{\text{Ix}} = V_{\text{IxH}}$ $I_{\text{Ox}} = -4\text{ mA}$, $V_{\text{Ix}} = V_{\text{IxH}}$ $I_{\text{Ox}} = 20\text{ }\mu\text{A}$, $V_{\text{Ix}} = V_{\text{IxL}}$ $I_{\text{Ox}} = 4\text{ mA}$, $V_{\text{Ix}} = V_{\text{IxL}}$ $0\text{ V} \leq V_{\text{Ix}} \leq V_{\text{DDx}}$
Logic Low Input Threshold	V_{IL}				V	
Logic High Output Voltages	V_{OH}	$V_{\text{DDx}} - 0.1$	3.0		V	
		$V_{\text{DDx}} - 0.5$	2.8		V	
Logic Low Output Voltages	V_{OL}		0.0	0.1	V	
			0.2	0.4	V	
Input Current per Channel	I_{I}	-10	+0.01	+10	μA	
Supply Current per Channel						
Quiescent Input Supply Current	$I_{\text{DDI(Q)}}$		0.3	0.5	mA	
Quiescent Output Supply Current	$I_{\text{DDO(Q)}}$		0.3	0.5	mA	
Dynamic Input Supply Current	$I_{\text{DDI(D)}}$		0.10		mA/Mbps	
Dynamic Output Supply Current	$I_{\text{DDO(D)}}$		0.03		mA/Mbps	
AC SPECIFICATIONS						
Common-Mode Transient Immunity ¹	$ CM $	25	35		kV/ μs	$V_{\text{Ix}} = V_{\text{DDx}}$, $V_{\text{CM}} = 1000\text{ V}$, transient magnitude = 800 V
Refresh Rate	f_r		1.1		Mbps	

¹ $|CM|$ is the maximum common-mode voltage slew rate that can be sustained while maintaining $V_o > 0.8 V_{\text{DD}}$. The common-mode voltage slew rates apply to both rising and falling common-mode voltage edges.

ELECTRICAL CHARACTERISTICS—MIXED 5 V/3 V, 105°C OPERATION

All typical specifications are at $T_A = 25^\circ\text{C}$, $V_{DD1} = 5\text{ V}$, $V_{DD2} = 3.0\text{ V}$. Minimum/maximum specifications apply over the entire recommended operation range: $4.5\text{ V} \leq V_{DD1} \leq 5.5\text{ V}$, $3.0\text{ V} \leq V_{DD2} \leq 3.6\text{ V}$, and $-40^\circ\text{C} \leq T_A \leq +105^\circ\text{C}$, unless otherwise noted. Switching specifications are tested with $C_L = 15\text{ pF}$ and CMOS signal levels, unless otherwise noted.

Table 7.

Parameter	Symbol	A Grade			B Grade			Unit	Test Conditions/ Comments
		Min	Typ	Max	Min	Typ	Max		
SWITCHING SPECIFICATIONS									
Data Rate				1			10	Mbps	Within PWD limit
Propagation Delay	t _{PHL} , t _{PLH}	15		55	15		55	ns	50% input to 50% output
Pulse Width Distortion	PWD			5			3	ns	t _{PLH} – t _{PHL}
Change vs. Temperature			6			5		ps/°C	
Pulse Width	PW								Within PWD limit
ADuM3210		1000			22			ns	
ADuM3211		1000			33			ns	
Propagation Delay Skew	t _{PSK}			29			22	ns	Between any two units
Channel Matching									
Codirectional	t _{PSKCD}			5			3	ns	
Opposing Directional	t _{PSKOD}			29			20	ns	
Output Rise/Fall Time	t _R /t _F		3.0			3.0		ns	10% to 90%

Table 8.

Parameter	Symbol	1 Mbps—A Grade, B Grade			10 Mbps—B Grade			Unit
		Min	Typ	Max	Min	Typ	Max	
SUPPLY CURRENT								
ADuM3210	I _{DD1}		1.3	1.7		3.5	4.6	mA
	I _{DD2}		0.7	1.0		1.1	1.7	mA
ADuM3211	I _{DD1}		1.1	1.5		2.6	3.4	mA
	I _{DD2}		0.8	1.6		1.9	2.4	mA

Table 9. For All Models

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions/Comments
DC SPECIFICATIONS						
Logic High Input Threshold	V_{IH}	$0.7 V_{DDx}$			V	
Logic Low Input Threshold	V_{IL}	$0.3 V_{DDx}$			V	
Logic High Output Voltages	V_{OH}	$V_{DDx} - 0.1$	V_{DDx}		V	$I_{Ox} = -20\text{ }\mu\text{A}$, $V_{Ix} = V_{IxH}$
		$V_{DDx} - 0.5$	$V_{DDx} - 0.2$		V	$I_{Ox} = -4\text{ mA}$, $V_{Ix} = V_{IxH}$
Logic Low Output Voltages	V_{OL}		0.0	0.1	V	$I_{Ox} = 20\text{ }\mu\text{A}$, $V_{Ix} = V_{IxL}$
			0.2	0.4	V	$I_{Ox} = 4\text{ mA}$, $V_{Ix} = V_{IxL}$
Input Current per Channel	I_i	-10	+0.01	+10	μA	$0\text{ V} \leq V_{Ix} \leq V_{DDx}$
Supply Current per Channel						
Quiescent Input Supply Current	$I_{DDI(Q)}$		0.4	0.8	mA	
Quiescent Output Supply Current	$I_{DDO(Q)}$		0.3	0.5	mA	
Dynamic Input Supply Current	$I_{DDI(D)}$		0.19		mA/Mbps	
Dynamic Output Supply Current	$I_{DDO(D)}$		0.03		mA/Mbps	
AC SPECIFICATIONS						
Common-Mode Transient Immunity ¹	$ CM $	25	35		kV/ μs	$V_{Ix} = V_{DDx}$, $V_{CM} = 1000\text{ V}$, transient magnitude = 800 V
Refresh Rate	f_r		1.2		Mbps	

¹ $|CM|$ is the maximum common-mode voltage slew rate that can be sustained while maintaining $V_O > 0.8 V_{DD}$. The common-mode voltage slew rates apply to both rising and falling common-mode voltage edges.

ELECTRICAL CHARACTERISTICS—MIXED 3 V/5 V, 105°C OPERATION

All typical specifications are at $T_A = 25^\circ\text{C}$, $V_{DD1} = 3\text{ V}$, $V_{DD2} = 5.0\text{ V}$. Minimum/maximum specifications apply over the entire recommended operation range: $3.0\text{ V} \leq V_{DD1} \leq 3.6\text{ V}$, $4.5\text{ V} \leq V_{DD2} \leq 5.5\text{ V}$, and $-40^\circ\text{C} \leq T_A \leq +105^\circ\text{C}$, unless otherwise noted. Switching specifications are tested with $C_L = 15\text{ pF}$ and CMOS signal levels, unless otherwise noted.

Table 10.

Parameter	Symbol	A Grade			B Grade			Unit	Test Conditions/ Comments
		Min	Typ	Max	Min	Typ	Max		
SWITCHING SPECIFICATIONS									
Data Rate	t _{PHL} , t _{PLH} PWD	15		1	15		10	Mbps	Within PWD limit
Propagation Delay				55			55	ns	50% input to 50% output
Pulse Width Distortion									
ADuM3210				5			3	ns	t _{PLH} – t _{PHL}
ADuM3211				6			4	ns	t _{PLH} – t _{PHL}
Change vs. Temperature			6			5		ps/°C	
Pulse Width	PW								Within PWD limit
ADuM3210		1000			22			ns	
ADuM3211		1000			33			ns	
Propagation Delay Skew	t _{PSK}			29			20	ns	Between any two units
Channel Matching									
Codirectional	t _{PSKCD}			15			3	ns	
Opposing Directional	t _{PSKOD}			29			22	ns	
Output Rise/Fall Time	t _R /t _F		2.5			2.5		ns	10% to 90%

Table 11.

Parameter	Symbol	1 Mbps—A Grade, B Grade			10 Mbps—B Grade			Unit
		Min	Typ	Max	Min	Typ	Max	
SUPPLY CURRENT								
ADuM3210	I _{DD1}		0.8	1.3		2.0	3.2	mA
	I _{DD2}		1.0	1.6		1.7	2.8	mA
ADuM3211	I _{DD1}		0.7	1.3		1.5	2.1	mA
	I _{DD2}		1.3	1.8		3.1	4.0	mA

Table 12. For All Models

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions/Comments
DC SPECIFICATIONS						
Logic High Input Threshold	V_{IH}	$0.7 V_{DDx}$			V	$I_{Ox} = -20\text{ }\mu\text{A}$, $V_{Ix} = V_{IxH}$ $I_{Ox} = -4\text{ mA}$, $V_{Ix} = V_{IxH}$ $I_{Ox} = 20\text{ }\mu\text{A}$, $V_{Ix} = V_{IxL}$ $I_{Ox} = 4\text{ mA}$, $V_{Ix} = V_{IxL}$ $0\text{ V} \leq V_{Ix} \leq V_{DDx}$
Logic Low Input Threshold	V_{IL}				V	
Logic High Output Voltages	V_{OH}	$V_{DDx} - 0.1$	V_{DDx}	$0.3 V_{DDx}$	V	
		$V_{DDx} - 0.5$	$V_{DDx} - 0.2$		V	
Logic Low Output Voltages	V_{OL}	0.0		0.1	V	
		0.2		0.4	V	
Input Current per Channel	I_I	-10	+0.01	+10	μA	
Supply Current per Channel						
Quiescent Input Supply Current	$I_{DDI(Q)}$		0.4	0.8	mA	
Quiescent Output Supply Current	$I_{DDO(Q)}$		0.5	0.8	mA	
Dynamic Input Supply Current	$I_{DDI(D)}$		0.10		mA/Mbps	
Dynamic Output Supply Current	$I_{DDO(D)}$		0.05		mA/Mbps	
AC SPECIFICATIONS						
Common-Mode Transient Immunity ¹	CM	25	35		kV/ μs	$V_{Ix} = V_{DDx}$, $V_{CM} = 1000\text{ V}$, transient magnitude = 800 V
Refresh Rate	f_r		1.1		Mbps	

¹ $|CM|$ is the maximum common-mode voltage slew rate that can be sustained while maintaining $V_o > 0.8 V_{\text{DD}}$. The common-mode voltage slew rates apply to both rising and falling common-mode voltage edges.

ELECTRICAL CHARACTERISTICS—5 V, 125°C OPERATION

All typical specifications are at $T_A = 25^\circ\text{C}$, $V_{DD1} = V_{DD2} = 5\text{ V}$. Minimum/maximum specifications apply over the entire recommended operation range: $4.5\text{ V} \leq V_{DD1} \leq 5.5\text{ V}$, $4.5\text{ V} \leq V_{DD2} \leq 5.5\text{ V}$, and $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$, unless otherwise noted. Switching specifications are tested with $C_L = 15\text{ pF}$ and CMOS signal levels, unless otherwise noted.

Table 13.

Parameter	Symbol	WA Grade			WB Grade, T Grade			WC Grade			Unit	Test Conditions/ Comments
		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max		
SWITCHING SPECIFICATIONS												
Data Rate	$t_{\text{PHL}}, t_{\text{PLH}}$			1			10			25	Mbps	Within PWD limit
Propagation Delay		20		50	20		50	20		50	ns	50% input to 50% output
Pulse Width Distortion	PWD			5			3			3	ns	$ t_{\text{PLH}} - t_{\text{PHL}} $
Change vs. Temperature			6			5			5		ps/°C	
Pulse Width	PW	1000			100			40			ns	Within PWD limit
Propagation Delay Skew	t_{PSK}			20			18			18	ns	Between any two units
Channel Matching												
Codirectional	t_{PSKCD}			5			3			3	ns	
Opposing Directional	t_{PSKOD}			20			18			18	ns	
Output Rise/Fall Time	$t_{\text{R}}/t_{\text{F}}$		2.5			2.5			2.5		ns	10% to 90%

Table 14.

		1 Mbps—WA Grade, WB Grade, WC Grade, T Grade			10 Mbps—WB Grade, WC Grade, T Grade			25 Mbps—WC Grade			
Parameter	Symbol	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Unit
SUPPLY CURRENT											
ADuM3210	I _{DD1}		1.3	1.7		3.5	4.6		6.6	9.0	mA
	I _{DD2}		1.0	1.6		1.7	2.8		3.7	4.5	mA
ADuM3211	I _{DD1}		1.1	1.5		2.6	3.4		5.3	7.5	mA
	I _{DD2}		1.3	1.8		3.1	4.0		5.9	8.0	mA

Table 15. For All Models

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions/Comments
DC SPECIFICATIONS						
Logic High Input Threshold	V_{IH}	$0.7 V_{DDx}$			V	$I_{Ox} = -20\text{ }\mu\text{A}$, $V_{Ix} = V_{IxH}$ $I_{Ox} = -4\text{ mA}$, $V_{Ix} = V_{IxH}$ $I_{Ox} = 20\text{ }\mu\text{A}$, $V_{Ix} = V_{IxL}$ $I_{Ox} = 4\text{ mA}$, $V_{Ix} = V_{IxL}$ $0\text{ V} \leq V_{Ix} \leq V_{DDx}$
Logic Low Input Threshold	V_{IL}			$0.3 V_{DDx}$	V	
Logic High Output Voltages	V_{OH}	$V_{DDx} - 0.1$	5.0		V	
		$V_{DDx} - 0.5$	4.8		V	
Logic Low Output Voltages	V_{OL}		0.0	0.1	V	
			0.2	0.4	V	
Input Current per Channel	I_I	-10	+0.01	+10	μA	
Supply Current per Channel						
Quiescent Input Supply Current	$I_{DD1(Q)}$		0.4	0.8	mA	
Quiescent Output Supply Current	$I_{DDO(Q)}$		0.4	0.8	mA	
Dynamic Input Supply Current	$I_{DD1(D)}$		0.19		mA/Mbps	
Dynamic Output Supply Current	$I_{DDO(D)}$		0.05		mA/Mbps	
AC SPECIFICATIONS						
Common-Mode Transient Immunity ¹	$ CM $	25	35		kV/ μs	$V_{Ix} = V_{DDx}$, $V_{CM} = 1000\text{ V}$, transient magnitude = 800 V
Refresh Rate	f_r		1.2		Mbps	

¹ $|CM|$ is the maximum common-mode voltage slew rate that can be sustained while maintaining $V_O > 0.8 V_{DD}$. The common-mode voltage slew rates apply to both rising and falling common-mode voltage edges.

ELECTRICAL CHARACTERISTICS—3 V, 125°C OPERATION

All typical specifications are at $T_A = 25^\circ\text{C}$, $V_{DD1} = V_{DD2} = 3.0\text{ V}$. Minimum/maximum specifications apply over the entire recommended operation range: $3.0\text{ V} \leq V_{DD1} \leq 3.6\text{ V}$, $3.0\text{ V} \leq V_{DD2} \leq 3.6\text{ V}$, and $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$, unless otherwise noted. Switching specifications are tested with $C_L = 15\text{ pF}$ and CMOS signal levels, unless otherwise noted.

Table 16.

Parameter	Symbol	WA Grade			WB Grade, T Grade			WC Grade			Unit	Test Conditions/ Comments
		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max		
SWITCHING SPECIFICATIONS												
Data Rate				1			10			25	Mbps	Within PWD limit
Propagation Delay	t _{PHL} , t _{PLH}	20		60	20		60	20		60	ns	50% input to 50% output
Pulse Width Distortion	PWD			6			4			4	ns	t _{PLH} – t _{PHL}
Change vs. Temperature			6			5			5		ps/°C	
Pulse Width	PW	1000			100			40			ns	Within PWD limit
Propagation Delay Skew	t _{PSK}			29			22			22	ns	Between any two units
Channel Matching												
Codirectional	t _{PSKCD}			5			3			3	ns	
Opposing Directional	t _{PSKOD}			29			20			20	ns	
Output Rise/Fall Time	t _R /t _F		3.0			3.0			3.0		ns	10% to 90%

Table 17.

		1 Mbps—WA Grade, WB Grade, WC Grade, T Grade			10 Mbps—WB Grade, WC Grade, T Grade			25 Mbps—WC Grade			
Parameter	Symbol	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Unit
SUPPLY CURRENT											
ADuM3210	I _{DD1}		0.8	1.3		2.0	3.2		3.9	5.5	mA
	I _{DD2}		0.7	1.0		1.1	1.7		2.4	3.0	mA
ADuM3211	I _{DD1}		0.7	1.3		1.5	2.1		3.1	4.5	mA
	I _{DD2}		0.8	1.6		1.9	2.4		3.5	5.0	mA

Table 18. For All Models

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions/Comments
DC SPECIFICATIONS						
Logic High Input Threshold	V_{IH}	$0.7 V_{DDx}$			V	$I_{Ox} = -20\text{ }\mu\text{A}$, $V_{Ix} = V_{IxH}$ $I_{Ox} = -4\text{ mA}$, $V_{Ix} = V_{IxH}$ $I_{Ox} = 20\text{ }\mu\text{A}$, $V_{Ix} = V_{IxL}$ $I_{Ox} = 4\text{ mA}$, $V_{Ix} = V_{IxL}$ $0\text{ V} \leq V_{Ix} \leq V_{DDx}$
Logic Low Input Threshold	V_{IL}				$0.3 V_{DDx}$	
Logic High Output Voltages	V_{OH}	$V_{DDx} - 0.1$	3.0		V	
		$V_{DDx} - 0.5$	2.8		V	
Logic Low Output Voltages	V_{OL}		0.0	0.1	V	
			0.2	0.4	V	
Input Current per Channel	I_I	-10	+0.01	+10	μA	
Supply Current per Channel						
Quiescent Input Supply Current	$I_{DDI(Q)}$		0.3	0.5	mA	
Quiescent Output Supply Current	$I_{DDO(Q)}$		0.3	0.5	mA	
Dynamic Input Supply Current	$I_{DDI(D)}$		0.10		mA/Mbps	
Dynamic Output Supply Current	$I_{DDO(D)}$		0.03		mA/Mbps	
AC SPECIFICATIONS						
Common-Mode Transient Immunity ¹	$ CM $	25	35		kV/ μs	$V_{Ix} = V_{DDx}$, $V_{CM} = 1000\text{ V}$, transient magnitude = 800 V
Refresh Rate	f_r		1.1		Mbps	

¹ $|CM|$ is the maximum common-mode voltage slew rate that can be sustained while maintaining $V_O > 0.8 V_{DD}$. The common-mode voltage slew rates apply to both rising and falling common-mode voltage edges.

ELECTRICAL CHARACTERISTICS—MIXED 5 V/3 V, 125°C OPERATION

All typical specifications are at $T_A = 25^\circ\text{C}$, $V_{DD1} = 5\text{ V}$, $V_{DD2} = 3.0\text{ V}$. Minimum/maximum specifications apply over the entire recommended operation range: $4.5\text{ V} \leq V_{DD1} \leq 5.5\text{ V}$, $3.0\text{ V} \leq V_{DD2} \leq 3.6\text{ V}$, and $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$, unless otherwise noted. Switching specifications are tested with $C_L = 15\text{ pF}$ and CMOS signal levels, unless otherwise noted.

Table 19.

Parameter	Symbol	WA Grade			WB Grade, T Grade			WC Grade			Unit	Test Conditions/ Comments
		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max		
SWITCHING SPECIFICATIONS												
Data Rate	$t_{\text{PHL}}, t_{\text{PLH}}$			1			10			25	Mbps	Within PWD limit
Propagation Delay		15		55	15		55	15		55	ns	50% input to 50% output
Pulse Width Distortion	PWD			5			3			3	ns	$ t_{\text{PLH}} - t_{\text{PHL}} $
Change vs. Temperature			6			5			5		ps/°C	
Pulse Width	PW	1000			100			40			ns	Within PWD limit
Propagation Delay Skew	t_{PSK}			29			22			22	ns	Between any two units
Channel Matching												
Codirectional	t_{PSKCD}			5			3			3	ns	
Opposing Directional	t_{PSKOD}			29			20			20	ns	
Output Rise/Fall Time	$t_{\text{R}}/t_{\text{F}}$		3.0			3.0			3.0		ns	10% to 90%

Table 20.

		1 Mbps—WA Grade, WB Grade, WC Grade, T Grade			10 Mbps—WB Grade, WC Grade, T Grade			25 Mbps—WC Grade			
Parameter	Symbol	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Unit
SUPPLY CURRENT											
ADuM3210	I _{DD1}		1.3	1.7		3.5	4.6		6.6	9.0	mA
	I _{DD2}		0.7	1.0		1.1	1.7		2.4	3.0	mA
ADuM3211	I _{DD1}		1.1	1.5		2.6	3.4		5.3	7.5	mA
	I _{DD2}		0.8	1.6		1.9	2.4		3.5	5.0	mA

Table 21. For All Models

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions/Comments
DC SPECIFICATIONS						
Logic High Input Threshold	V_{IH}	$0.7 V_{DDx}$			V	$I_{Ox} = -20\text{ }\mu\text{A}$, $V_{Ix} = V_{IxH}$ $I_{Ox} = -4\text{ mA}$, $V_{Ix} = V_{IxH}$ $I_{Ox} = 20\text{ }\mu\text{A}$, $V_{Ix} = V_{IxL}$ $I_{Ox} = 4\text{ mA}$, $V_{Ix} = V_{IxL}$ $0\text{ V} \leq V_{Ix} \leq V_{DDx}$
Logic Low Input Threshold	V_{IL}			$0.3 V_{DDx}$	V	
Logic High Output Voltages	V_{OH}	$V_{DDx} - 0.1$	V_{DDx}		V	
		$V_{DDx} - 0.5$	$V_{DDx} - 0.2$		V	
Logic Low Output Voltages	V_{OL}		0.0	0.1	V	
			0.2	0.4	V	
Input Current per Channel	I_I	-10	+0.01	+10	μA	
Supply Current per Channel						
Quiescent Input Supply Current	$I_{DD1(Q)}$		0.4	0.8	mA	
Quiescent Output Supply Current	$I_{DDO(Q)}$		0.3	0.5	mA	
Dynamic Input Supply Current	$I_{DD1(D)}$		0.19		mA/Mbps	
Dynamic Output Supply Current	$I_{DDO(D)}$		0.03		mA/Mbps	
AC SPECIFICATIONS						
Common-Mode Transient Immunity ¹	$ CM $	25	35		kV/ μs	$V_{Ix} = V_{DDx}$, $V_{CM} = 1000\text{ V}$, transient magnitude = 800 V
Refresh Rate	f_r		1.2		Mbps	

¹ $|CM|$ is the maximum common-mode voltage slew rate that can be sustained while maintaining $V_O > 0.8 V_{DD}$. The common-mode voltage slew rates apply to both rising and falling common-mode voltage edges.

ELECTRICAL CHARACTERISTICS—MIXED 3 V/5 V, 125°C OPERATION

All typical specifications are at $T_A = 25^\circ\text{C}$, $V_{DD1} = 3\text{ V}$, $V_{DD2} = 5.0\text{ V}$. Minimum/maximum specifications apply over the entire recommended operation range: $3.0\text{ V} \leq V_{DD1} \leq 3.6\text{ V}$, $4.5\text{ V} \leq V_{DD2} \leq 5.5\text{ V}$, and $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$, unless otherwise noted. Switching specifications are tested with $C_L = 15\text{ pF}$ and CMOS signal levels, unless otherwise noted.

Table 22.

Parameter	Symbol	WA Grade			WB Grade, T Grade			WC Grade			Unit	Test Conditions/ Comments
		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max		
SWITCHING SPECIFICATIONS												
Data Rate				1			10			25	Mbps	Within PWD limit
Propagation Delay	$t_{\text{PHL}}, t_{\text{PLH}}$	15		55	15		55	15		55	ns	50% input to 50% output
Pulse Width Distortion	PWD			6			4			4	ns	$ t_{\text{PLH}} - t_{\text{PHL}} $
Change vs. Temperature			6			5			5		ps/°C	
Pulse Width	PW	1000			100			40			ns	Within PWD limit
Propagation Delay Skew	t_{PSK}			29			22			22	ns	Between any two units
Channel Matching												
Codirectional	t_{PSKCD}			15			3			3	ns	
Opposing Directional	t_{PSKOD}			29			20			20	ns	
Output Rise/Fall Time	t_R/t_F		2.5			2.5			2.5		ns	10% to 90%

Table 23.

Parameter	Symbol	1 Mbps—WA Grade, WB Grade, WC Grade, T Grade			10 Mbps—WB Grade, WC Grade, T Grade			25 Mbps—WC Grade			Unit
		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
SUPPLY CURRENT											
ADuM3210	I_{DD1}		0.8	1.3		2.0	3.2		3.9	5.5	mA
	I_{DD2}		1.0	1.6		1.7	2.8		3.7	4.5	mA
ADuM3211	I_{DD1}		0.7	1.3		1.5	2.1		3.1	4.5	mA
	I_{DD2}		1.3	1.8		3.1	4.0		5.9	8.0	mA

Table 24. For All Models

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions/Comments
DC SPECIFICATIONS						
Logic High Input Threshold	V_{IH}	$0.7 V_{DDx}$			V	
Logic Low Input Threshold	V_{IL}			$0.3 V_{DDx}$	V	
Logic High Output Voltages	V_{OH}	$V_{DDx} - 0.1$	V_{DDx}		V	$I_{Ox} = -20\text{ }\mu\text{A}$, $V_{Ix} = V_{IxH}$
		$V_{DDx} - 0.5$	$V_{DDx} - 0.2$		V	$I_{Ox} = -4\text{ mA}$, $V_{Ix} = V_{IxH}$
Logic Low Output Voltages	V_{OL}		0.0	0.1	V	$I_{Ox} = 20\text{ }\mu\text{A}$, $V_{Ix} = V_{IxL}$
			0.2	0.4	V	$I_{Ox} = 4\text{ mA}$, $V_{Ix} = V_{IxL}$
Input Current per Channel	I_I	-10	+0.01	+10	μA	$0\text{ V} \leq V_{Ix} \leq V_{DDx}$
Supply Current per Channel						
Quiescent Input Supply Current	$I_{DD1(Q)}$		0.4	0.8	mA	
Quiescent Output Supply Current	$I_{DDO(Q)}$		0.5	0.8	mA	
Dynamic Input Supply Current	$I_{DD1(D)}$		0.10		mA/Mbps	
Dynamic Output Supply Current	$I_{DDO(D)}$		0.05		mA/Mbps	
AC SPECIFICATIONS						
Common-Mode Transient Immunity ¹	$ CM $	25	35		kV/ μs	$V_{Ix} = V_{DDx}$, $V_{CM} = 1000\text{ V}$, transient magnitude = 800 V
Refresh Rate	f_r		1.1		Mbps	

¹ $|CM|$ is the maximum common-mode voltage slew rate that can be sustained while maintaining $V_O > 0.8 V_{DD}$. The common-mode voltage slew rates apply to both rising and falling common-mode voltage edges.

PACKAGE CHARACTERISTICS

Table 25.

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions/Comments
Resistance (Input-to-Output) ¹	R_{I-O}		10 ¹²		Ω	f = 1 MHz
Capacitance (Input-to-Output) ¹	C_{I-O}		1.0		pF	
Input Capacitance	C_I		4.0		pF	
IC Junction-to-Case Thermal Resistance, Side 1	θ_{JC1}		46		°C/W	Thermocouple located at center of package underside
IC Junction-to-Case Thermal Resistance, Side 2	θ_{JC0}		41		°C/W	

¹ The device is considered a 2-terminal device; Pin 1 through Pin 4 are shorted together, and Pin 5 through Pin 8 are shorted together.

REGULATORY INFORMATION

The ADuM3210/ADuM3211 are approved by the organizations listed in Table 26.

Table 26.

UL	CSA	VDE
Recognized under UL 1577 component recognition program ¹	Approved under CSA Component Acceptance Notice #5A	Certified according to DIN V VDE V 0884-10 (VDE V 0884-10):2006-12 ²
Single/basic 2500 V rms isolation voltage	Basic insulation per CSA 60950-1-03 and IEC 60950-1, 400 V rms (566 V peak) maximum working voltage Functional insulation per CSA 60950-1-03 and IEC 60950-1, 800 V rms (1131 V peak) maximum working voltage	Reinforced insulation, 560 V peak
File E214100	File 205078	File 2471900-4880-0001

¹ In accordance with UL 1577, each ADuM3210/ADuM3211 is proof tested by applying an insulation test voltage ≥ 3000 V rms for 1 sec (current leakage detection limit = 5 μ A).

² In accordance with DIN V VDE V 0884-10 (VDE V 0884-10):2006-12, each ADuM3210/ADuM3211 is proof tested by applying an insulation test voltage ≥ 1050 V peak for 1 sec (partial discharge detection limit = 5 pC). The asterisk (*) marking branded on the component designates DIN V VDE V 0884-10 (VDE V 0884-10):2006-12 approval.

INSULATION AND SAFETY-RELATED SPECIFICATIONS

Table 27.

Parameter	Symbol	Value	Unit	Test Conditions/Comments
Rated Dielectric Insulation Voltage		2500	V rms	1-minute duration
Minimum External Air Gap (Clearance)	L(I01)	4.90 min	mm	Measured from input terminals to output terminals, shortest distance through air
Minimum External Tracking (Creepage)	L(I02)	4.01 min	mm	Measured from input terminals to output terminals, shortest distance path along body
Minimum Internal Distance (Internal Clearance)		0.017 min	mm	Insulation distance through insulation
Tracking Resistance (Comparative Tracking Index)	CTI	>175	V	DIN IEC 112/VDE 0303, Part 1
Isolation Group		IIIa		Material Group (DIN VDE 0110, 1/89, Table 1)

INSULATION CHARACTERISTICS (DIN V VDE V 0884-10 (VDE V 0884-10):2006-12)

These isolators are suitable for reinforced isolation only within the safety limit data. Maintenance of the safety data is ensured by protective circuits. The asterisk (*) marking branded on the component designates DIN V VDE V 0884-10 (VDE V 0884-10):2006-12 approval for a 560 V peak working voltage.

Table 28.

Description	Test Conditions/Comments	Symbol	Characteristic	Unit
Installation Classification per DIN VDE 0110 For Rated Mains Voltage ≤ 150 V rms For Rated Mains Voltage ≤ 300 V rms For Rated Mains Voltage ≤ 400 V rms			I to IV I to III I to II	
Climatic Classification			40/105/21	
Pollution Degree per DIN VDE 0110, Table 1			2	
Maximum Working Insulation Voltage		V_{IORM}	560	V peak
Input-to-Output Test Voltage, Method B1	$V_{IORM} \times 1.875 = V_{PR}$, 100% production test, $t_m = 1$ sec, partial discharge < 5 pC	V_{PR}	1050	V peak
Input-to-Output Test Voltage, Method A				
After Environmental Tests Subgroup 1	$V_{IORM} \times 1.6 = V_{PR}$, $t_m = 60$ sec, partial discharge < 5 pC	V_{PR}	896	V peak
After Input and/or Safety Tests Subgroup 2 and Subgroup 3	$V_{IORM} \times 1.2 = V_{PR}$, $t_m = 60$ sec, partial discharge < 5 pC	V_{PR}	672	V peak
Highest Allowable Overvoltage	Transient overvoltage, $t_{TR} = 10$ sec	V_{TR}	4000	V peak
Safety-Limiting Values	Maximum value allowed in the event of a failure (see Figure 3)			
Case Temperature		T_S	150	°C
Side 1 Current		I_{S1}	160	mA
Side 2 Current		I_{S2}	170	mA
Insulation Resistance at T_S	$V_{IO} = 500$ V	R_S	>10 ⁹	Ω

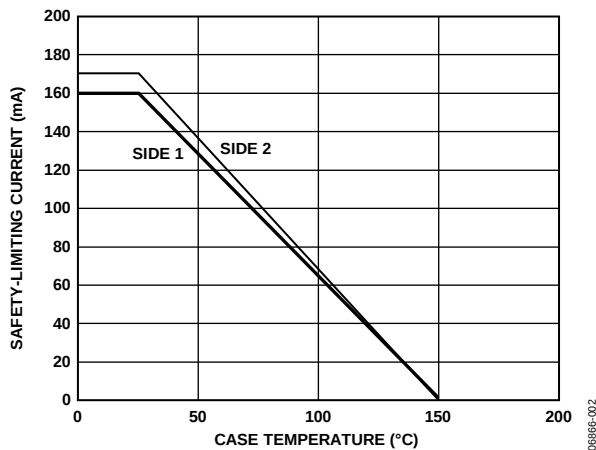


Figure 3. Thermal Derating Curve, Dependence of Safety-Limiting Values on Case Temperature per DIN V VDE V 0884-10

RECOMMENDED OPERATING CONDITIONS**Table 29.**

Parameter	Symbol	Rating
Operating Temperature	T_A	–40°C to +105°C
ADuM3210A/ADuM3211A		–40°C to +105°C
ADuM3210B/ADuM3211B		–40°C to +105°C
ADuM3210T/ADuM3211T		–40°C to +125°C
ADuM3210WA/ADuM3211WA		–40°C to +125°C
ADuM3210WB/ADuM3211WB		–40°C to +125°C
ADuM3210WC/ADuM3211WC		–40°C to +125°C
Supply Voltages ¹	V_{DD1}, V_{DD2}	3 V to 5.5 V
Maximum Input Signal Rise and Fall Times		1 ms

¹ All voltages are relative to their respective ground. See the DC Correctness and Magnetic Field Immunity section for information about immunity to external magnetic fields.

ABSOLUTE MAXIMUM RATINGS

$T_A = 25^\circ\text{C}$, unless otherwise noted.

Table 30.

Parameter	Rating
Storage Temperature (T_{ST})	-55°C to $+150^\circ\text{C}$
Ambient Operating Temperature (T_A)	-40°C to $+125^\circ\text{C}$
Supply Voltages (V_{DD1} , V_{DD2}) ¹	-0.5 V to $+7.0\text{ V}$
Input Voltage (V_{IA} , V_{IB}) ^{1,2}	-0.5 V to $V_{DD1} + 0.5\text{ V}$
Output Voltage (V_{OA} , V_{OB}) ^{1,2}	-0.5 V to $V_{DDO} + 0.5\text{ V}$
Average Output Current per Pin (I_O) ³	-22 mA to $+22\text{ mA}$
Common-Mode Transients (CM_H , CM_L) ⁴	$-100\text{ kV}/\mu\text{s}$ to $+100\text{ kV}/\mu\text{s}$

¹ Each voltage is relative to its respective ground.

² V_{DD1} and V_{DDO} refer to the supply voltages on the input and output sides of a given channel, respectively.

³ See Figure 3 for maximum allowable current values for various temperatures.

⁴ Refers to common-mode transients across the insulation barrier. Common-mode transients exceeding the absolute maximum rating can cause latch-up or permanent damage.

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Table 31. Maximum Continuous Working Voltage¹

Parameter	Max	Unit	Constraint
AC Voltage, Bipolar Waveform	565	V peak	50-year minimum lifetime
AC Voltage, Unipolar Waveform			
Functional Insulation	1131	V peak	Maximum approved working voltage per IEC 60950-1
Basic Insulation	560	V peak	Maximum approved working voltage per IEC 60950-1 and VDE V 0884-10
DC Voltage			
Functional Insulation	1131	V peak	Maximum approved working voltage per IEC 60950-1
Basic Insulation	560	V peak	Maximum approved working voltage per IEC 60950-1 and VDE V 0884-10

¹ Refers to the continuous voltage magnitude imposed across the isolation barrier. See the Insulation Lifetime section for more information.

ESD CAUTION



ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

PIN CONFIGURATIONS AND FUNCTION DESCRIPTIONS




Figure 4. ADuM3210 Pin Configuration




Figure 5. ADuM3211 Pin Configuration

Table 32. ADuM3210 Pin Function Descriptions

Pin No.	Mnemonic	Description
1	V_{DD1}	Supply Voltage for Isolator Side 1, 3.0V to 5.5 V.
2	V_{IA}	Logic Input A.
3	V_{IB}	Logic Input B.
4	GND_1	Ground 1. Ground reference for Isolator Side 1.
5	GND_2	Ground 2. Ground reference for Isolator Side 2.
6	V_{OB}	Logic Output B.
7	V_{OA}	Logic Output A.
8	V_{DD2}	Supply Voltage for Isolator Side 2, 3.0V to 5.5 V.

Table 33. ADuM3211 Pin Function Descriptions

Pin No.	Mnemonic	Description
1	V_{DD1}	Supply Voltage for Isolator Side 1, 3.0V to 5.5 V.
2	V_{OA}	Logic Output A.
3	V_{IB}	Logic Input B.
4	GND_1	Ground 1. Ground reference for Isolator Side 1.
5	GND_2	Ground 2. Ground reference for Isolator Side 2.
6	V_{OB}	Logic Output B.
7	V_{IA}	Logic Input A.
8	V_{DD2}	Supply Voltage for Isolator Side 2, 3.0V to 5.5 V.

TRUTH TABLES

Table 34. ADuM3210 Truth Table (Positive Logic)

V_{IA} Input ¹	V_{IB} Input ¹	V_{DD1} State	V_{DD2} State	V_{OA} Output ¹	V_{OB} Output ¹	Notes
H	H	Powered	Powered	H	H	Outputs return to the input state within 1 μ s of V_{DD1} power restoration Outputs return to the input state within 1 μ s of V_{DD2} power restoration
L	L	Powered	Powered	L	L	
H	L	Powered	Powered	H	L	
L	H	Powered	Powered	L	H	
X	X	Unpowered	Powered	L	L	
X	X	Powered	Unpowered	Indeterminate	Indeterminate	

¹ H is logic high, L is logic low, and X is don't care.

Table 35. ADuM3211 Truth Table (Positive Logic)

V_{IA} Input ¹	V_{IB} Input ¹	V_{DD1} State	V_{DD2} State	V_{OA} Output ¹	V_{OB} Output ¹	Notes
H	H	Powered	Powered	H	H	Outputs return to the input state within 1 μ s of V_{DD1} power restoration Outputs return to the input state within 1 μ s of V_{DD2} power restoration
L	L	Powered	Powered	L	L	
H	L	Powered	Powered	H	L	
L	H	Powered	Powered	L	H	
X	X	Unpowered	Powered	Indeterminate	L	
X	X	Powered	Unpowered	L	Indeterminate	

¹ H is logic high, L is logic low, and X is don't care.

TYPICAL PERFORMANCE CHARACTERISTICS

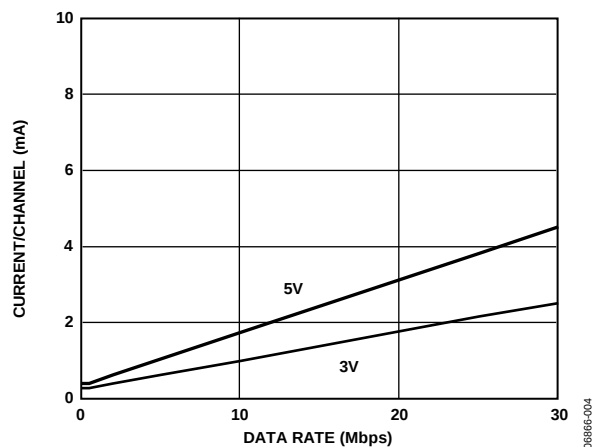


Figure 6. Typical Input Supply Current per Channel vs. Data Rate for 5 V and 3 V Operation

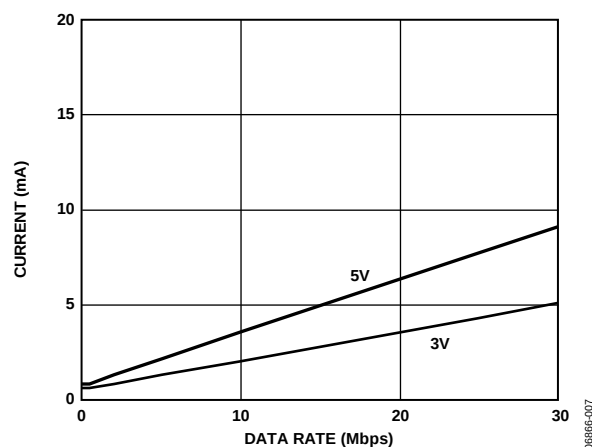


Figure 9. ADuM3210 Typical I_{DD1} Supply Current vs. Data Rate for 5 V and 3 V Operation

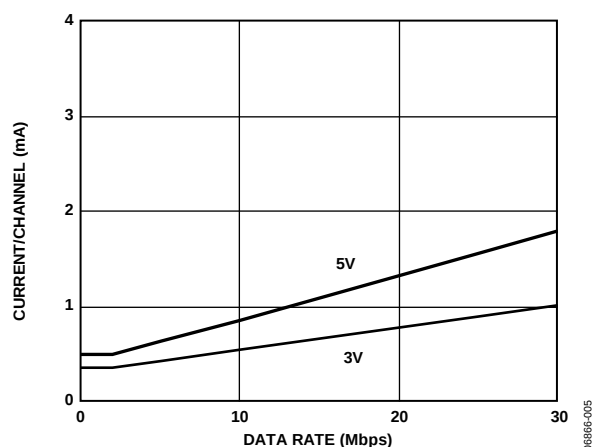


Figure 7. Typical Output Supply Current per Channel vs. Data Rate for 5 V and 3 V Operation (No Output Load)

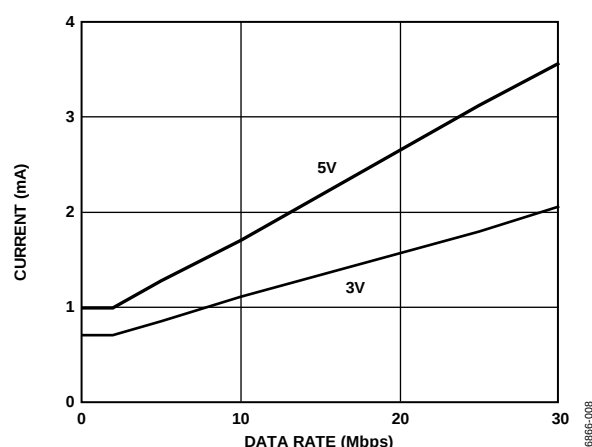


Figure 10. ADuM3210 Typical I_{DD2} Supply Current vs. Data Rate for 5 V and 3 V Operation

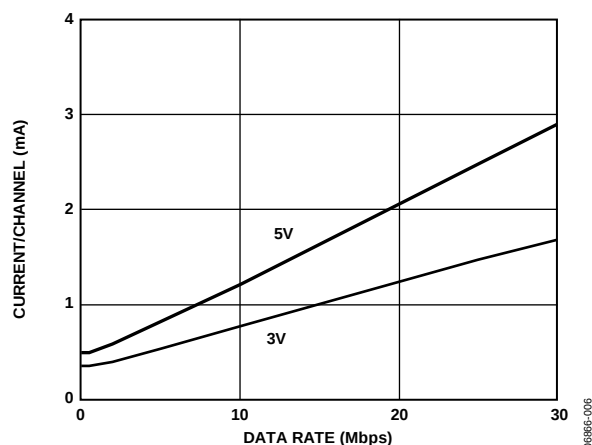


Figure 8. Typical Output Supply Current per Channel vs. Data Rate for 5 V and 3 V Operation (15 pF Output Load)

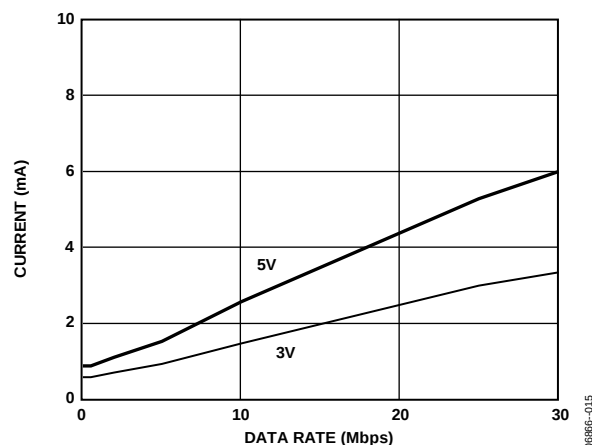


Figure 11. ADuM3211 Typical I_{DD1} or I_{DD2} Supply Current vs. Data Rate for 5 V and 3 V Operation

APPLICATIONS INFORMATION

PC BOARD LAYOUT

The ADuM3210/ADuM3211 digital isolators require no external interface circuitry for the logic interfaces. Power supply bypassing is strongly recommended at the input and output supply pins. The capacitor value should be between 0.01 μF and 0.1 μF . The total lead length between both ends of the capacitor and the input power supply pin should not exceed 2 mm.

See the [AN-1109 Application Note](#) for board layout guidelines.

SYSTEM-LEVEL ESD CONSIDERATIONS AND ENHANCEMENTS

System-level ESD reliability (for example, per IEC 61000-4-x) is highly dependent on system design, which varies widely by application. The ADuM3210/ADuM3211 incorporate many enhancements to make ESD reliability less dependent on system design. The enhancements include

- ESD protection cells are added to all input/output interfaces.
- Key metal trace resistances are reduced using wider geometry and paralleling of lines with vias.
- The SCR effect inherent in CMOS devices is minimized by use of a guarding and isolation technique between the PMOS and NMOS devices.
- Areas of high electric field concentration are eliminated using 45° corners on metal traces.
- Supply pin overvoltage is prevented with larger ESD clamps between each supply pin and its respective ground.

Although the ADuM3210/ADuM3211 improve system-level ESD reliability, they are no substitute for a robust system-level design. For detailed recommendations on board layout and system-level design, see the [AN-793 Application Note, ESD/Latch-Up Considerations with iCoupler Isolation Products](#).

PROPAGATION DELAY-RELATED PARAMETERS

Propagation delay is a parameter that describes the time it takes a logic signal to propagate through a component. The propagation delay to a logic low output can differ from the propagation delay to a logic high output.

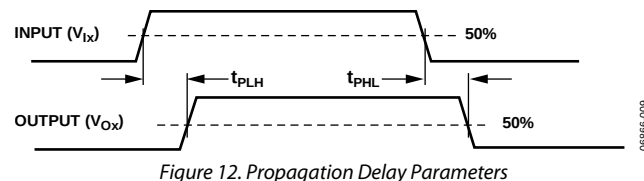


Figure 12. Propagation Delay Parameters

Pulse width distortion is the maximum difference between these two propagation delay values and is an indication of how accurately the timing of the input signal is preserved.

Channel-to-channel matching refers to the maximum amount that the propagation delay differs between channels within a single ADuM3210/ADuM3211 component.

Propagation delay skew refers to the maximum amount that the propagation delay differs between multiple ADuM3210/ADuM3211 components operating under the same conditions.

DC CORRECTNESS AND MAGNETIC FIELD IMMUNITY

Positive and negative logic transitions at the isolator input cause narrow (~1 ns) pulses to be sent to the decoder via the transformer. The decoder is bistable and is, therefore, either set or reset by the pulses, indicating input logic transitions. In the absence of logic transitions at the input for more than 2 μs , a periodic set of refresh pulses indicative of the correct input state is sent to ensure dc correctness at the output. If the decoder receives no internal pulses for more than approximately 5 μs , the input side is assumed to be unpowered or nonfunctional, and the isolator output is forced to a default state by the watchdog timer circuit (see Table 34 and Table 35).

The ADuM3210/ADuM3211 are immune to external magnetic fields. The limitation on the magnetic field immunity of the ADuM3210/ADuM3211 is set by the condition in which induced voltage in the receiving coil of the transformer is sufficiently large to either falsely set or reset the decoder. The following analysis defines the conditions under which this can occur. The 3 V operating condition of the ADuM3210/ADuM3211 is examined because it represents the most susceptible mode of operation.

The pulses at the transformer output have an amplitude greater than 1.0 V. The decoder has a sensing threshold at approximately 0.5 V, thus establishing a 0.5 V margin in which induced voltages can be tolerated. The voltage induced across the receiving coil is given by

$$V = (-d\beta/dt) \sum \pi r_n^2; n = 1, 2, \dots, N$$

where:

β is the magnetic flux density (gauss).

r_n is the radius of the n^{th} turn in the receiving coil (cm).

N is the total number of turns in the receiving coil.

Given the geometry of the receiving coil in the ADuM3210/ADuM3211 and an imposed requirement that the induced voltage be, at most, 50% of the 0.5 V margin at the decoder, a maximum allowable magnetic field is calculated as shown in Figure 13.

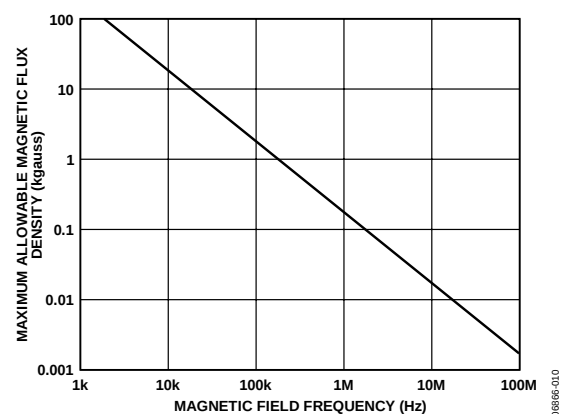


Figure 13. Maximum Allowable External Magnetic Flux Density

For example, at a magnetic field frequency of 1 MHz, the maximum allowable magnetic field of 0.2 kgauss induces a voltage of 0.25 V at the receiving coil. The voltage is approximately 50% of the sensing threshold and does not cause a faulty output transition. Similarly, if such an event occurs during a transmitted pulse (and is of the worst-case polarity), it reduces the received pulse from >1.0 V to 0.75 V, which is still well above the 0.5 V sensing threshold of the decoder.

The preceding magnetic flux density values correspond to specific current magnitudes at given distances from the ADuM3210/ADuM3211 transformers. Figure 14 expresses these allowable current magnitudes as a function of frequency for selected distances. As shown in Figure 14, the ADuM3210/ADuM3211 are immune and can be affected only by extremely large currents operated at high frequency very close to the component. For the 1 MHz example, a 0.5 kA current placed 5 mm away from the ADuM3210/ADuM3211 is required to affect the operation of the component.

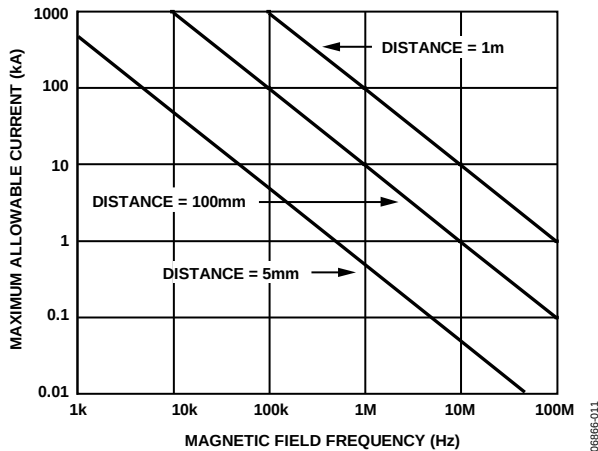


Figure 14. Maximum Allowable Current for Various Current-to-ADuM3210/ADuM3211 Spacings

Note that at combinations of strong magnetic fields and high frequency, any loops formed by the printed circuit board (PCB) traces can induce error voltages sufficiently large to trigger the thresholds of succeeding circuitry. Care should be taken in the layout of such traces to avoid this possibility.

POWER CONSUMPTION

The supply current at a given channel of the ADuM3210/ADuM3211 isolator is a function of the supply voltage, channel data rate, and channel output load.

For each input channel, the supply current is given by

$$I_{DDI} = I_{DDI(Q)} \quad f \leq 0.5f_r$$

$$I_{DDI} = I_{DDI(D)} \times (2f - f_r) + I_{DDI(Q)} \quad f > 0.5f_r$$

For each output channel, the supply current is given by

$$I_{DDO} = I_{DDO(Q)} \quad f \leq 0.5f_r$$

$$I_{DDO} = (I_{DDO(D)} + (0.5 \times 10^{-3}) \times C_L V_{DDO}) \times (2f - f_r) + I_{DDO(Q)} \quad f > 0.5f_r$$

where:

$I_{DDI(D)}$, $I_{DDO(D)}$ are the input and output dynamic supply currents per channel (mA/Mbps).

$I_{DDI(Q)}$, $I_{DDO(Q)}$ are the specified input and output quiescent supply currents (mA).

C_L is the output load capacitance (pF).

V_{DDO} is the output supply voltage (V).

f is the input logic signal frequency (MHz, half of the input data rate, NRZ signaling).

f_r is the input stage refresh rate (Mbps).

To calculate the total I_{DD1} and I_{DD2} supply current, the supply currents for each input and output channel corresponding to I_{DD1} and I_{DD2} are calculated and totaled.

Figure 6 provides the input supply currents per channel as a function of data rate. Figure 7 and Figure 8 provide the output supply currents per channel as a function of data rate for an unloaded output condition and for a 15 pF output condition, respectively. Figure 9 through Figure 11 provide total I_{DD1} and I_{DD2} supply current as a function of data rate for the ADuM3210 and ADuM3211 channel configurations.

INSULATION LIFETIME

All insulation structures eventually break down when subjected to voltage stress over a sufficiently long period. The rate of insulation degradation is dependent on the characteristics of the voltage waveform applied across the insulation. In addition to the testing performed by the regulatory agencies, Analog Devices carries out an extensive set of evaluations to determine the lifetime of the insulation structure within the [ADuM3210/ADuM3211](#).

Analog Devices performs accelerated life testing using voltage levels higher than the rated continuous working voltage. Acceleration factors for several operating conditions are determined. These factors allow calculation of the time to failure at the actual working voltage.

The values shown in Table 31 summarize the peak voltage for 50 years of service life for a bipolar ac operating condition and the maximum CSA/VDE approved working voltages. In many cases, the approved working voltage is higher than the 50-year service life voltage. Operation at these high working voltages can lead to shortened insulation life in some cases.

The insulation lifetime of the [ADuM3210/ADuM3211](#) depends on the voltage waveform type imposed across the isolation barrier. The iCoupler insulation structure degrades at different rates depending on whether the waveform is bipolar ac, unipolar ac, or dc. Figure 15, Figure 16, and Figure 17 illustrate these different isolation voltage waveforms.

Bipolar ac voltage is the most stringent environment. The goal of a 50-year operating lifetime under the bipolar ac condition determines the maximum working voltage recommended by Analog Devices.

In the case of unipolar ac or dc voltage, the stress on the insulation is significantly lower. This allows operation at higher working voltages while still achieving a 50-year service life. The working voltages listed in Table 31 can be applied while maintaining the 50-year minimum lifetime, provided that the voltage conforms to either the unipolar ac or dc voltage cases.

Any cross-insulation voltage waveform that does not conform to Figure 16 or Figure 17 should be treated as a bipolar ac waveform, and its peak voltage should be limited to the 50-year lifetime voltage value listed in Table 31.

Note that the voltage presented in Figure 16 is shown as sinusoidal for illustration purposes only. It is meant to represent any voltage waveform varying between 0 V and some limiting value. The limiting value can be positive or negative, but the voltage cannot cross 0 V.




Figure 15. Bipolar AC Waveform




Figure 16. Unipolar AC Waveform





Figure 17. DC Waveform

OUTLINE DIMENSIONS

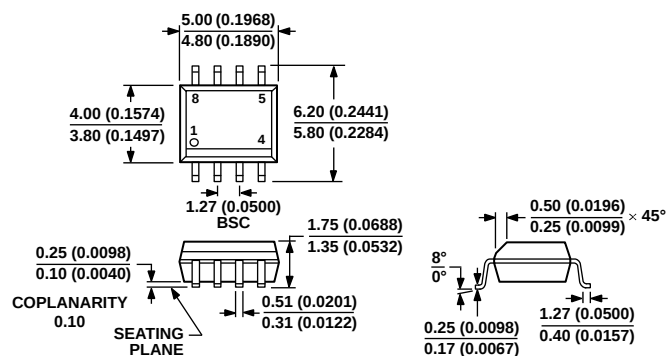

COMPLIANT TO JEDEC STANDARDS MS-012-AA
CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS
(IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR
REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

Figure 18. 8-Lead Standard Small Outline Package [SOIC_N]
Narrow Body
(R-8)

Dimensions shown in millimeters and (inches)

012407-A

ORDERING GUIDE

Model ^{1,2}	Number of Inputs, V _{DD1} Side	Number of Inputs, V _{DD2} Side	Maximum Data Rate (Mbps)	Maximum Propagation Delay, 5 V (ns)	Maximum Pulse Width Distortion (ns)	Temperature Range	Package Option ³
ADuM3210ARZ	2	0	1	50	5	−40°C to +105°C	R-8
ADuM3210ARZ-RL7	2	0	1	50	5	−40°C to +105°C	R-8
ADuM3210BRZ	2	0	10	50	3	−40°C to +105°C	R-8
ADuM3210BRZ-RL7	2	0	10	50	3	−40°C to +105°C	R-8
ADuM3210TRZ	2	0	10	50	3	−40°C to +125°C	R-8
ADuM3210TRZ-RL7	2	0	10	50	3	−40°C to +125°C	R-8
ADuM3210WARZ	2	0	1	50	5	−40°C to +125°C	R-8
ADuM3210WARZ-RL7	2	0	1	50	5	−40°C to +125°C	R-8
ADuM3210WBRZ	2	0	10	50	3	−40°C to +125°C	R-8
ADuM3210WBRZ-RL7	2	0	10	50	3	−40°C to +125°C	R-8
ADuM3210WCRZ	2	0	25	50	3	−40°C to +125°C	R-8
ADuM3210WCRZ-RL7	2	0	25	50	3	−40°C to +125°C	R-8
ADuM3211ARZ	1	1	1	50	6	−40°C to +105°C	R-8
ADuM3211ARZ-RL7	1	1	1	50	6	−40°C to +105°C	R-8
ADuM3211BRZ	1	1	10	50	4	−40°C to +105°C	R-8
ADuM3211BRZ-RL7	1	1	10	50	4	−40°C to +105°C	R-8
ADuM3211TRZ	1	1	10	50	4	−40°C to +125°C	R-8
ADuM3211TRZ-RL7	1	1	10	50	4	−40°C to +125°C	R-8
ADuM3211WARZ	1	1	1	50	6	−40°C to +125°C	R-8
ADuM3211WARZ-RL7	1	1	1	50	6	−40°C to +125°C	R-8
ADuM3211WBRZ	1	1	10	50	4	−40°C to +125°C	R-8
ADuM3211WBRZ-RL7	1	1	10	50	4	−40°C to +125°C	R-8
ADuM3211WCRZ	1	1	25	50	4	−40°C to +125°C	R-8
ADuM3211WCRZ-RL7	1	1	25	50	4	−40°C to +125°C	R-8

¹ Z = RoHS Compliant Part.² W = Qualified for Automotive Applications.³ R-8 = 8-lead, narrow body SOIC_N.

AUTOMOTIVE PRODUCTS

The [ADuM3210W/ADuM3211W](#) models are available with controlled manufacturing to support the quality and reliability requirements of automotive applications. Note that these automotive models may have specifications that differ from the commercial models; therefore, designers should review the Specifications section of this data sheet carefully. Only the automotive grade products shown are available for use in automotive applications. Contact your local Analog Devices account representative for specific product ordering information and to obtain the specific Automotive Reliability reports for these models.

NOTES

NOTES

NOTES