

Rochester Electronics Manufactured Components

Rochester branded components are manufactured using either die/wafers purchased from the original suppliers or Rochester wafers recreated from the original IP. All recreations are done with the approval of the OCM.

Parts are tested using original factory test programs or Rochester developed test solutions to guarantee product meets or exceed the OCM data sheet.

Quality Overview

- ISO-9001
- AS9120 certification
- Qualified Manufacturers List (QML) MIL-PRF-35835
 - Class Q Military
 - Class V Space Level
- Qualified Suppliers List of Distributors (QSLD)
 - Rochester is a critical supplier to DLA and meets all industry and DLA standards.

Rochester Electronics, LLC is committed to supplying products that satisfy customer expectations for quality and are equal to those originally supplied by industry manufacturers.

The original manufacturer's datasheet accompanying this document reflects the performance and specifications of the Rochester manufactured version of this device. Rochester Electronics guarantees the performance of its semiconductor products to the original OEM specifications. 'Typical' values are for reference purposes only. Certain minimum or maximum ratings may be based on product characterization, design, simulation, or sample testing.




DM54L72 AND-Gated Master-Slave J-K Flip-Flop with Preset, Clear and Complementary Outputs

General Description

This device contains a positive pulse triggered master-slave J-K flip-flop with complementary outputs. Multiple J and K inputs are ANDed together to produce the internal J and K function for the flip-flop. The J and K data is processed by the flip-flop after a complete clock pulse. While the clock is low the slave is isolated from the master. On the positive transition of the clock, the data from the AND gates is transferred to the master. While the clock is high the AND gate

inputs are disabled. On the negative transition of the clock the data from the master is transferred to the slave. The logic state of the J and K inputs must not be allowed to change while the clock is in the high state. Data is transferred to the outputs on the falling edge of the clock pulse. A low logic level on the preset or clear inputs sets or resets the outputs regardless of the logic levels of the other inputs.

Connection Diagram

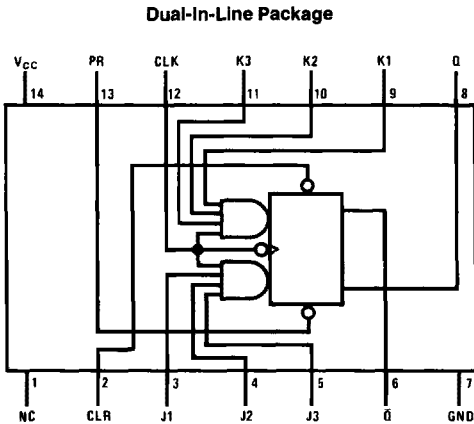

TL/F/6629-1

Order Number DM54L72J or DM54L72W
See NS Package Number J14A or W14B

Function Table

Inputs					Outputs	
PR	CLR	CLK	J (Note 1)	K (Note 1)	Q	\bar{Q}
L	H	X	X	X	H	L
H	L	X	X	X	L	H
L	L	X	X	X	H*	H*
H	H	\neg	L	L	Q_0	\bar{Q}_0
H	H	\neg	H	L	H	L
H	H	\neg	L	H	L	H
H	H	\neg	H	H	Toggle	

Note 1: J = (J1)(J2)(J3), K = (K1)(K2)(K3)

H = High Logic Level

X = Either Low or High Logic Level

L = Low Logic Level

\neg = Positive pulse. The J and K inputs must be held constant while the clock is high. Data is transferred to the outputs on the falling edge of the clock pulse.

Q_0 = The output logic level before the indicated input conditions were established.

* = This configuration is nonstable; that is, it will not persist when the preset and/or clear inputs return to their inactive (high) level.

Toggle = Each output changes to the complement of its previous level on each complete high level clock pulse.

Absolute Maximum Ratings (Note)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage 8V

Input Voltage 5.5V

Operating Free Air Temperature Range
DM54L -55°C to +125°C

Storage Temperature Range -65°C to +150°C

Note: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the "Electrical Characteristics" table are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Recommended Operating Conditions

Symbol	Parameter		DM54L72			Units
			Min	Nom	Max	
V _{CC}	Supply Voltage		4.5	5	5.5	V
V _{IH}	High Level Input Voltage		2			V
V _{IL}	Low Level Input Voltage	Clock			0.6	V
		Others			0.7	
I _{OH}	High Level Output Current				-0.2	mA
I _{OL}	Low Level Output Current				2	mA
f _{CLK}	Clock Frequency (Note 2)		0		6	MHz
t _w	Pulse Width (Note 2)	Clock High	100			ns
		Clock Low	100			
		Preset Low	100			
		Clear Low	100			
t _{SU}	Input Setup Time (Notes 1 & 2)		0 ↑			ns
t _H	Input Hold Time (Notes 1 & 2)		0 ↓			ns
T _A	Free Air Operating Temperature		-55		125	°C

Note 1: The symbols (↑, ↓) indicate the edge of the clock pulse used for reference: ↑ for rising edge, ↓ for falling edge.

Note 2: T_A = 25°C and V_{CC} = 5V.

Electrical Characteristics over recommended operating free air temperature (unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ (Note 1)	Max	Units
V_{OH}	High Level Output Voltage	$V_{CC} = \text{Min}, I_{OH} = \text{Max}$ $V_{IL} = \text{Max}, V_{IH} = \text{Min}$	2.4	3.3		V
V_{OL}	Low Level Output Voltage	$V_{CC} = \text{Min}, I_{OL} = \text{Max}$ $V_{IL} = \text{Max}, V_{IH} = \text{Min}$		0.15	0.3	V
I_I	Input Current @ Max Input Voltage	$V_{CC} = \text{Max}$ $V_I = 5.5V$	J, K		100	μA
			Clear		200	
			Preset		200	
			Clock		200	
I_{IH}	High Level Input Current	$V_{CC} = \text{Max}$ $V_I = 2.4V$	J, K		10	μA
			Clear		20	
			Preset		20	
			Clock		-200	
I_{IL}	Low Level Input Current	$V_{CC} = \text{Max}$ $V_I = 0.3V$	J, K		-0.18	mA
			Clear		-0.36	
			Preset		-0.36	
			Clock		-0.36	
I_{OS}	Short Circuit Output Current	$V_{CC} = \text{Max}$	-3		-15	mA
I_{CC}	Supply Current	$V_{CC} = \text{Max}$ (Note 2)		0.76	1.44	mA

Note 1: All typicals are at $V_{CC} = 5V$, $T_A = 25^\circ C$.

Note 2: With all outputs open, I_{CC} is measured with the Q and \bar{Q} outputs high in turn. At the time of measurement the clock input is grounded.

Switching Characteristics at $V_{CC} = 5V$ and $T_A = 25^\circ C$ (See Section 1 for Test Waveforms and Output Load)

Symbol	Parameter	From (Input) To (Output)	$R_L = 4\text{ k}\Omega$, $C_L = 50\text{ pF}$		Units
			Min	Max	
f_{MAX}	Maximum Clock Frequency		6		MHz
t_{PLH}	Propagation Delay Time Low to High Level Output	Preset to Q		75	ns
t_{PHL}	Propagation Delay Time High to Low Level Output	Preset to \bar{Q}		150	ns
t_{PLH}	Propagation Delay Level Output Low to High Level Output	Clear to \bar{Q}		75	ns
t_{PHL}	Propagation Delay Time High to Low Level Output	Clear to Q		150	ns
t_{PLH}	Propagation Delay Time Low to High Level Output	Clock to Q or \bar{Q}	10	75	ns
t_{PHL}	Propagation Delay Time High to Low Level Output	Clock to Q or \bar{Q}	10	150	ns