


SEAM-20-01-L-06-2-RA-GP-TR

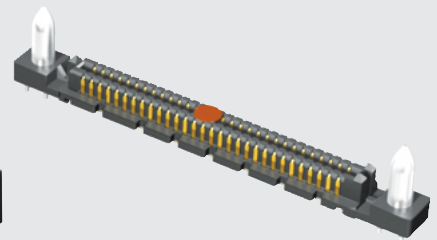

SEAM-30-02.0-L-04-2-A-GP-K-TR

(1,27 mm) .050"

SEAM-RA, SEAM-GP SERIES

HI-DENSITY RIGHT ANGLE OPEN PIN FIELD

SEAM-RA Mates with:
SEAF, SEAF-RA, SEAFP

SEAM-GP Mates with:
SEAF-RA-GP

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?SEAM-RA or www.samtec.com?SEAM

Insulator Material:

Black LCP

Contact Material:

Copper Alloy

Current Rating:

SEAM-RA = 2.0 A per pin

(6 adjacent pins powered)

Operating Temp Range:

-55°C to +125°C

Plating:

Au or Sn over

50 μ" (1,27 μm) Ni

Contact Resistance:

SEAM-RA = 19 mΩ

SEAM-GP = 5.5 mΩ

Working Voltage:

SEAM-RA = 260 VAC

SEAM-GP = 240 VAC

Mated Cycles:

SEAM-RA = 100

RoHS Compliant:

Yes

Lead-Free Solderable:

Yes

SEAM	NO. PINS PER ROW	01	PLATING OPTION	NO. OF ROWS	SOLDER TYPE	RA	OPTION	TR
	-20, -30, -40, -50		-L = 10 μ" (0,25 μm) Gold on contact area, Matte Tin on solder tail -S = 30 μ" (0,76 μm) Gold on contact area, Matte Tin on solder tail	-04 = Four Rows -06 = Six Rows -08* = Eight Rows -10* = Ten Rows	-1 = Tin/Lead Alloy Solder Charge -2 = Lead-Free Solder Charge		-GP = Guide Post -K = Polyimide film Pick & Place Pad	-TR = Tape & Reel

NO. PINS PER ROW	A
-20	(38,94) 1.533
-30	(51,64) 2.033
-40	(64,34) 2.533
-50	(77,04) 3.03

TEST DATA*	SEAM-RA/SEAF-05	SEAM-RA/SEAF-RA
Single-Ended	23 Gbps	24 Gbps
Differential Pair	23 Gbps	22 Gbps

* @ 3dB insertion loss. Test board losses de-embedded from performance data.
Complete test data available at www.samtec.com?SEAM-RA or contact sig@samtec.com

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



FILE NO. E111594

SEAM	NO. PINS PER ROW	02.0	PLATING OPTION	NO. OF ROWS	SOLDER TYPE	A	GP	K	TR
	-20, -30, -40, -50		-L = 10 μ" (0,25 μm) Gold on contact area, Matte Tin on solder tail -S = 30 μ" (0,76 μm) Gold on contact area, Matte Tin on solder tail	-04 = Four Rows -06 = Six Rows -08 = Eight Rows -10 = Ten Rows	-1 = Tin/Lead Alloy Solder Charge -2 = Lead-Free Solder Charge			-K = Polyimide film Pick & Place Pad -TR = Tape & Reel (Not available with 50 positions)	

ALSO AVAILABLE (MOQ Required)

- Extended Guide Post
- Guide post Field termination kits
- Other platings

Contact Samtec.

Note: SEAM-GP Patented

Note: Some sizes, styles and options are non-standard, non-returnable.