


SHF-110-01-L-D-RA

ESHF-125-01-L-D-SM-LC

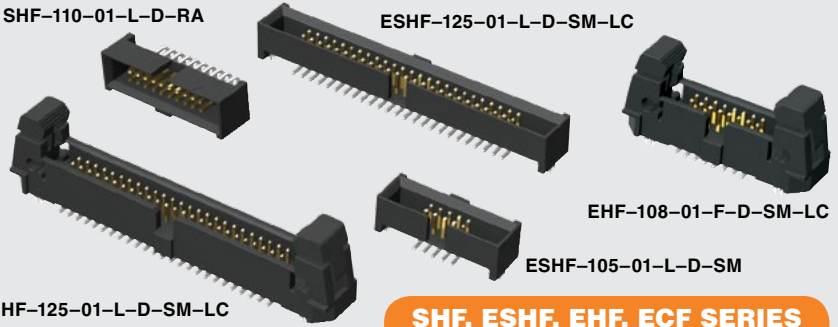

EHF-108-01-F-D-SM-LC

ESHF-105-01-L-D-SM

EHF-125-01-L-D-SM-LC

SHF, ESHF, EHF, ECF SERIES

(1.27 mm) .050"

SHROUDED & EJECTOR IDC HEADER

SHF, ESHF Mates with:
FFSD, FFTP (SHF)

EHF Mates with:
FFSD*, FFTP

SPECIFICATIONS

For complete specifications see www.samtec.com?SHF, www.samtec.com?ESHF or www.samtec.com?EHF

Insulator Material:
Black Liquid Crystal Polymer
Terminal Material:
Phosphor Bronze
Plating:
Sn or Au over 50 μ" (1.27 μm) Ni
Operating Temp Range:
-55 °C to +125 °C
RoHS Compliant:
Yes

PROCESSING

Lead-Free Solderable:
Yes
SMT Lead Coplanarity:
(0.10 mm) .004" max

RECOGNITIONS


For complete scope of recognitions see www.samtec.com/quality



ALSO AVAILABLE (MOQ Required)

- Other sizes
- Contact Samtec.

EJECTOR HEADER CAP (Locks FFSD cable to EHF header)



ECF	NO. PINS PER ROW
	05, 08, 10, 13, 17, 20, 25

***Important Note:**
EHF will not mate to FFSD with strain relief (-SR option), see ESHF series.

Note: Some lengths, styles and options are non-standard, non-returnable.

TYPE STRIP	1	NO. PINS PER ROW	01	PLATING OPTION	D	TAIL STYLE	OTHER OPTION
SHF = Mates with FFSD without Strain Relief		04, 05, 06, 08, 10, 11, 12, 13, 15, 17, 20, 25 (Standard sizes)		-L = 10 μ" (0.25 μm) Gold on post, Matte Tin on tail		-TH = Through-hole	-LC = Locking Clip (Not available with -RA) (Manual placement required)
ESHF = Mates with FFSD with Strain Relief						-RA = Right-angle	-TR = Tape & Reel Packaging
						-SM = Surface Mount	-K = (6.50 mm) .256" DIA Polyimide Film Pick & Place Pad (-SM only)

EHF	1	NO. PINS PER ROW	01	PLATING OPTION	D	TAIL OPTION	OTHER OPTION
		04, 05, 08, 10, 13, 17, 20, 25 (Standard sizes)		-F = Gold flash on post, Matte Tin on tail		Leave blank for Through-Hole version	- "XX" = Polarized Position (-RA not available)
				-L = 10 μ" (0.25 μm) Gold on post, Matte Tin on tail		-SM = Surface Mount	-LC = Locking Clip (-SM only) (Manual placement required)
						-RA = Right-angle	-K = (7.50 mm) .295" DIA Polyimide Film Pick & Place Pad
							-P = Pick & Place Pad (-SM only)
							-TR = Tape & Reel Packaging (-LC not available)

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications. Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.