
**SFPE SERIES**

# SFP+ PASSIVE JUMPER CABLE

**SPECIFICATIONS**

For complete specifications see [www.samtec.com?SFPE](http://www.samtec.com?SFPE)

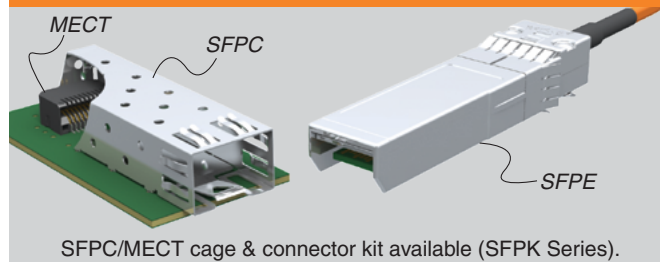
**Impedance:**

100  $\Omega$

**Signal Routing:**

Differential

**Mates with:**  
MECT, SFPC

**APPLICATION**


1 channel (2 pair)  
transmitting up to 10 Gbps

Compliant  
to SFP+

Hot pluggable

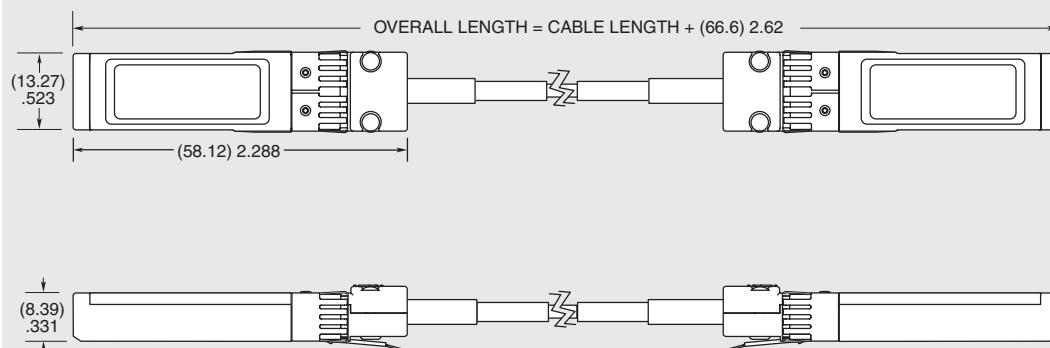
**ALSO AVAILABLE**  
(MOQ Required)

- Other lengths available. Cable assemblies longer than 3 m are not supported with S.I. test data.

**SFPE**
**NO. OF  
PAIRS**
**CABLE  
LENGTH**
**EQUALIZATION**
**WIRE  
GAUGE**
**-010**  
= 2 Pairs

**-XXXX**  
= Length in  
millimeters  
-1000, -2000, -3000  
(Standard lengths)

**-NE**  
= Non Equalized

**-32**  
= 32 AWG


**Note:** Some sizes, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

[WWW.SAMTEC.COM](http://WWW.SAMTEC.COM)

All parts within this catalog are built to Samtec's specifications.  
Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.