




PCI
EXPRESS®
4.0 SOLUTIONS

PCIe®-OVER-FIBER ADAPTOR CARD

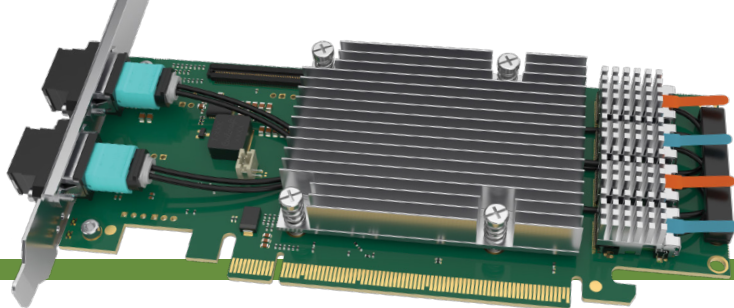

PCOA

DATA RATE

WIDTH

BRACKET

-G3
= 3.0 Speed

-G4
= 4.0 Speed

-S4
= Single x4

-D4
= Dual x4

-Q4
= Quad x4



-S8
= Single x8

-D8
= Dual x8 or Single x16

-0A
= Full Height

FEATURES

- Uses PCUO FireFly™ optical cable for clear signal transmissions with increased reach and cost optimization
- PCIe® x16 edge card connector
- Scalable configurations for cost optimized performance
- Transparent or non-transparent bridging for system flexibility and multi-processor support
- Reconfigurable host or target operation
- Ideal for high-performance and applications requiring robust data transmission

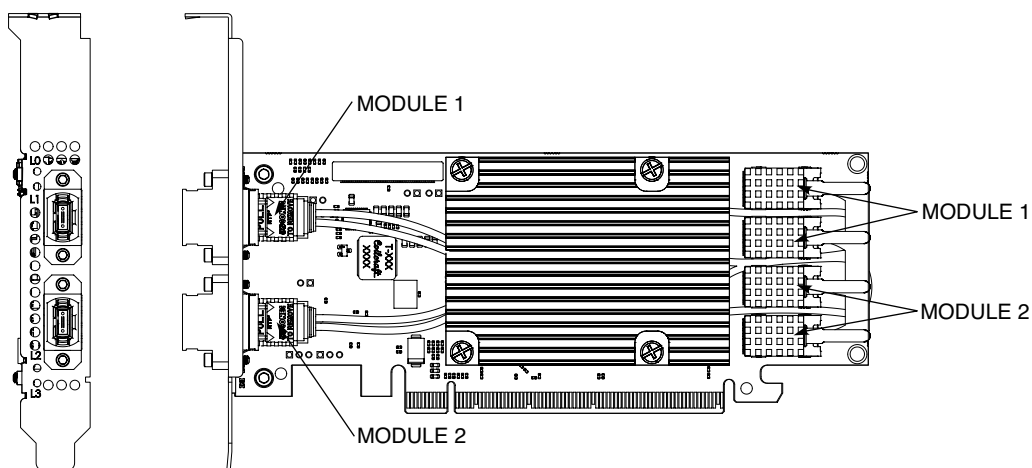

PCOA-G4-D8-0A SHOWN

CLASS 1 LASER PRODUCT
per IEC 60825-1 Ed. 3 (2014)

Notes:

Some lengths, styles and options are non-standard, non-returnable.

PCI-SIG®, PCI Express® and the PCIe® design marks are registered trademarks and/or service marks of PCI-SIG.

View complete specifications at: samtec.com?PCOA

samtec.com/FireFly

F-226