



GRF1-P-P-04-E-ST-TH1



GRF1-J-P-04-E-ST-TH1

GRF1-J-P-04-E-ST-TH1-E

GRF1-J, GRF1-P SERIES

50 Ω GANGED MICRO-MINI RF SYSTEMS

For complete specifications and recommended PCB layouts see www.samtec.com?GRF1-J or www.samtec.com?GRF1-P

5

Yes

For complete scope of recognitions see www.samtec.com/quality



- Cable assembly
(see GRF1-C Series)

GRF1  **J**  **P**  **NO. OF JACKS**  **PLATING**  **LEAD STYLE**  **TH1**  **INSERT OPTION**

Mates with:
GRF1-P, GRF1-C,
GRF1H-C



**-02, -04,
-06, -08**

-E
" (0.76 μ m)
on Center
uctor & Tail,
d Flash on
il and Tails



-ST
= Vertical

-RA
= Right-

-E
= #1 - 64 Through-hole
Threaded Insert,
Mates with GRF1-C with
captive screw option

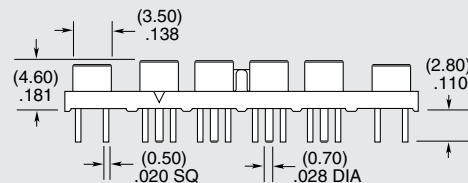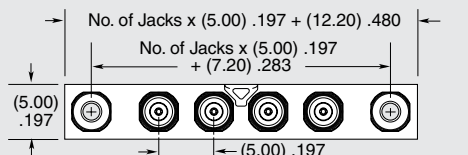

-ST-TH1-E
SHOWN

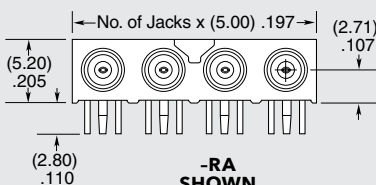

**-RA
SHOWN**

GRF1 P P NO. OF PLUGS PLATING ST TH1

Mates with:
GRF1-J

-02, -04, -06, -08

-E
= 30 μ" (0.76 μm) Gold on Center Conductor & Tail,
Gold Flash on Shell and Tails

