

DO NOT SCALE FROM THIS PRINT


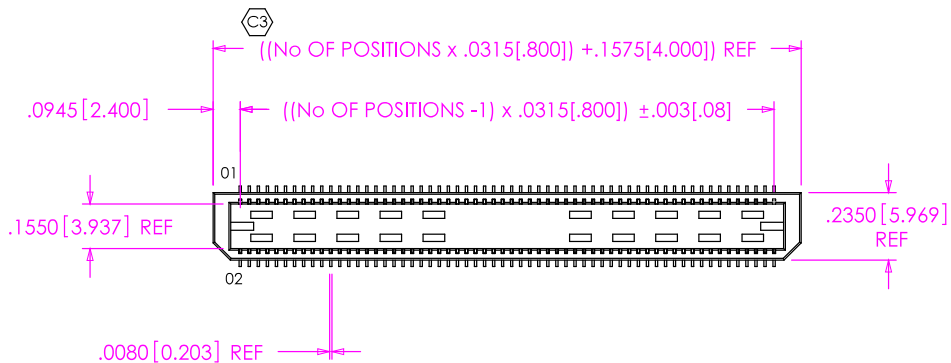


FIG. 1
BTE-060-01-X-D-LC SHOWN


BTE-XXX-XX-X-D-XX

- No OF POSITIONS**
 -020, -040, -060, -080
 -100, -120
 *-090
 (PER ROW)
 *-03 BODY STYLE ONLY
- BODY STYLE**
 -01: .1680[4.267]
 -02: .2861[7.264]
 -03: .4042[1.123]
 -04: .6000[15.240]
 -05: .7180[18.237]
 -06: .8360[21.234]
 -07: .9542 [24.237]
 -08: 1.1511[29.238]
 -09: .5224 [13.269]
- OPTION**
 -A: ALIGNMENT PINS
 (USE BTE-XXX-XX-D-A)
 -LC: LOCKING CLIPS
 (USE LC-08-TM-01)
 -K: POLYAMIDE FILM
 (N/A ON STYLES -07 & -08)
 (USE K-500-300, SEE FIG. 2)
 -TR: TAPE & REEL (80 POS MAX)
 [N/A ON STYLE -05, -06, -07 & -08]
 -FL: FRICTION LOCK (SEE FIG. 4, SHEET 3)
 (USE BTE-XXX-01-D-X-FL)
 (AVAIL ON LEAD STYLE -01 ONLY,
 -020 THRU -100 POSITIONS ONLY)
- ROW SPECIFICATION**
 -D: DOUBLE (USE BTE-XXX-XX-D-X
 & BTEH-XXX-XX-D-X)

- PLATING SPECIFICATION**
 -F: FLASH SELECTIVE GOLD (USE T-1SXX-XX-F) (SEE NOTE 10)
 -L: LIGHT SELECTIVE GOLD (USE T-1SXX-XX-L) (SEE NOTE 10)
 -H: HEAVY GOLD (USE T-1SXX-XX-H)

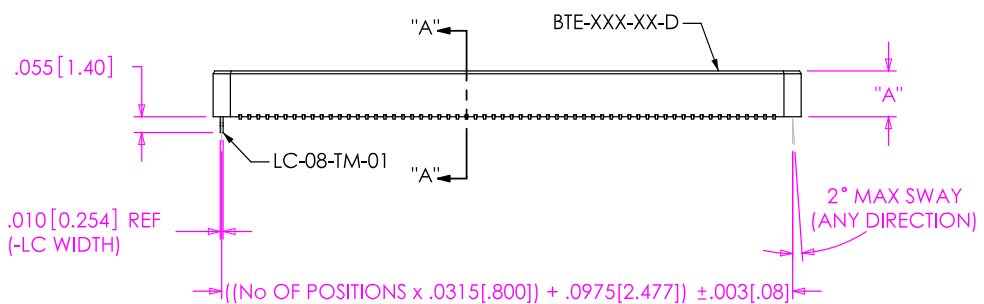


-LC: LOCKING CLIP OPTION

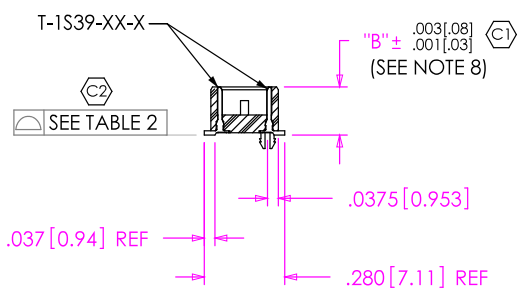

SECTION "A"- "A"

- NOTES:**
 1. (C) REPRESENTS A CRITICAL DIMENSION.
 2. NOTE DELETED.
 3. BURR ALLOWANCE: .0015[.038] MAX.
 4. NOTE DELETED.
 5. MINIMUM PUSHOUT FORCE: 6 OZ.
 6. NOTE DELETED.
 7. PARTS TO BE MOLD TO POSITION.
 8. MAX VARIANCE OF .002[.05].
 9. BTE-XXX-03-D BODY CAN BE SUBSTITUTED FOR BTE-XXX-03-D-A.
 10. -L PLATING CAN BE SUBSTITUTED FOR -F PLATING.

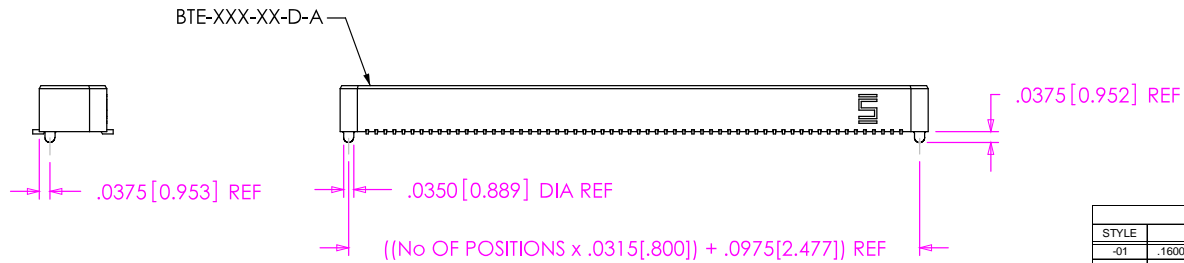

-A: ALIGNMENT PIN OPTION

TABLE 1					
STYLE	"A"	"B"	BODY	TERMINAL	MATED HEIGHT WITH BSE
-01	.1600[4.064] REF	.1680[4.267]	BTE-XXX-01-D	T-1S39-01-X	.1980[5.029] REF
-02	.2781[7.064] REF	.2861[7.267]	BTE-XXX-02-D	T-1S59-02-X	.3161[8.029] REF
-03	.3962[10.063] REF	.4042[10.267]	BTE-XXX-03-D	T-1S39-03-X	.4342[11.029] REF

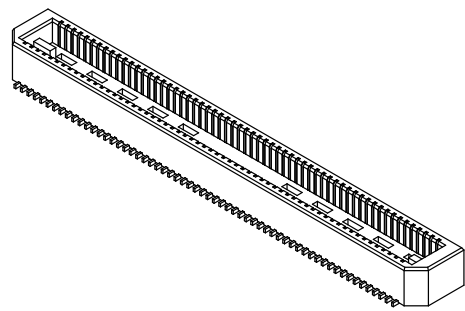


TABLE 2	
No OF POS	COPLANARITY
-020 THRU -080	.004[.10]
-100 THRU -120	.006[.15]

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE:
 DECIMALS ANGLES
 .XX: ±.01 [.3]
 .XXX: ±.005 [.13]
 .XXXX: ±.0020 [.051]


PROPRIETARY NOTE
 THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

MATERIAL: DO NOT SCALE DRAWING SHEET SCALE: 1.5:1
 INSULATOR: LCP, COLOR: BLACK
 TERMINAL: PHOS BRONZE

SAMTEC
 520 PARK EAST BLVD, NEW ALBANY, IN 47150
 * PHONE: 812.944.6733 FAX: 812.948.5047
 e-Mail: INFO@SAMTEC.COM CODE: 55322

DESCRIPTION: .8mm DOUBLE ROW TERMINAL ASSEMBLY
 DWG. NO. **BTE-XXX-XX-X-D-XX**
 BY: DEAN P 03/22/1999 SHEET 1 OF 3

FIG. 2
-K: POLYAMIDE FILM PAD
[USE K-500-300]

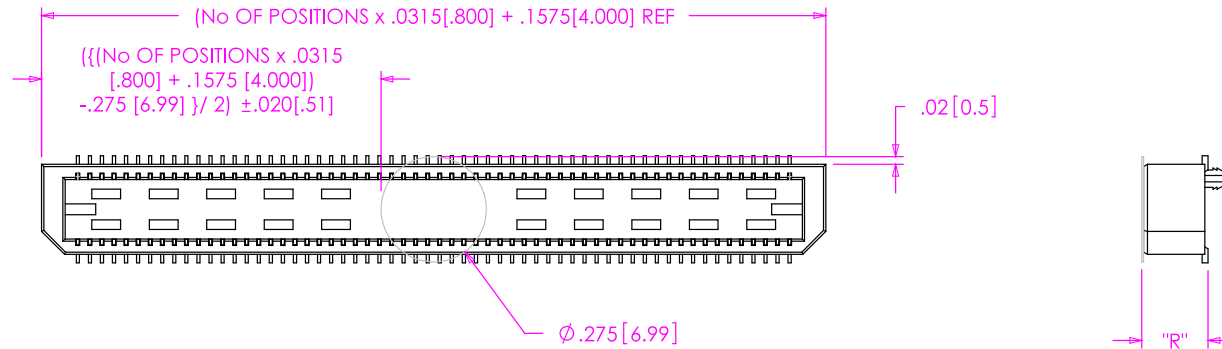

STYLE	"R"
-01	.173 [4.39]
-02	.291 [7.39]
-03	.409 [10.39]
-04	.609 [15.47]
-05	.727 [18.47]
-06	.842 [21.39]
-09	.535 [13.60]

PACKAGING VIEW


[PARTS TO HAVE POSITION #1 LOADED
IN SAME DIRECTION AS ARROW]
[LOAD PARTS WITH -K OPTION IN TUBE SO THAT
THE KAPTON PAD IS RESTING ON THE RIBS]

AB


[STYLE -08]

STYLE	PACKAGING TUBE	PLUG
-01	PT-1-24-01-78	TP-07
-02		
-03		
-04	PT-1-24-01-98	TP-26
-05		
-06		
-07	PT-1-24-02-104	
-08	PT-1-24-01-104	
-09	PT-1-24-01-98	


[STYLES -01, -02 & -03]




[STYLES -04, -05 & -09]



[STYLE -06]

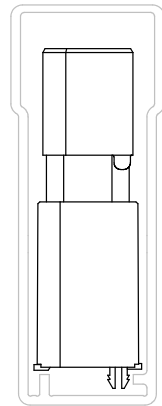

[STYLE -07]

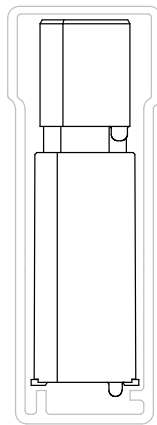

TUBE: PT-1-24-01-78
PLUG: TP-07

TUBE: PT-1-24-01-98
PLUG: TP-26

TUBE: PT-1-24-01-105
PLUG: TP-26

TUBE: PT-1-24-02-104
PLUG: TP-26

TUBE: PT-1-24-01-104
PLUG: TP-26

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 2:1

F:\DWG\MISC\MKTG\BTE-XXX-XX-X-D-XX-MKT.SLDDRW

SAMTEC

520 PARK EAST BLVD, NEW ALBANY, IN 47150
* PHONE: 812.944.6733 FAX: 812.948.5047
e-Mail: INFO@SAMTEC.COM CODE: 55322


DESCRIPTION:
.8mm DOUBLE ROW TERMINAL ASSEMBLY

DWG. NO.
BTE-XXX-XX-X-D-XX


BY: DEAN P 03/22/1999 SHEET 2 OF 3

FIG. 3

BTE-060-06-X-D-LC SHOWN
[DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1]

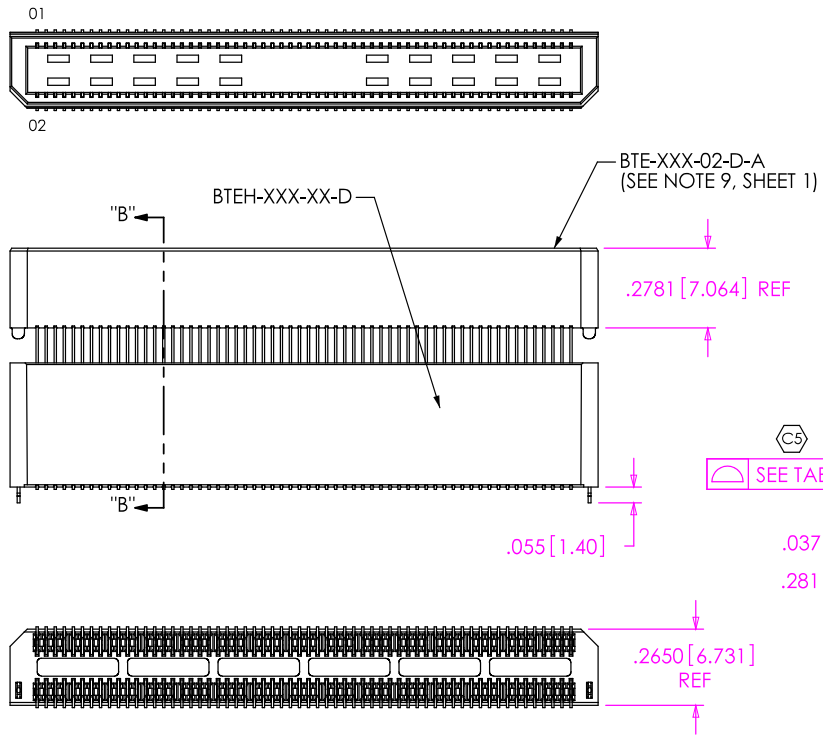

-LC: LOCKING CLIP OPTION

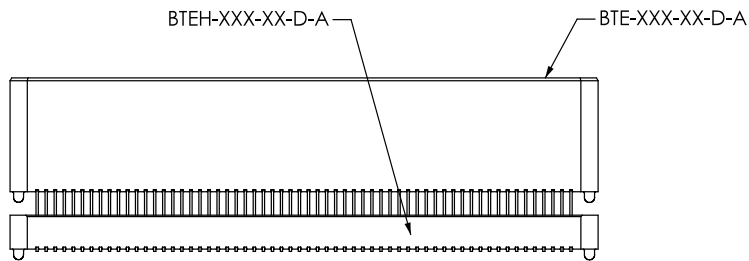


-A: ALIGNMENT PIN OPTION
[STYLE -04, -05, -06, -07, -08 & -09]

TABLE 4					
STYLE	"C"	TERMINAL	BOTTOM BODY	TOP BODY	MATED HEIGHT WITH BSE
-04	.6000 [15.240]	T-1S41-04-X	BTEH-XXX-01-D-X	BTE-XXX-03-D-A	.634 [16.10] REF
-05	.7180 [18.237]	T-1S41-05-X	BTEH-XXX-01-D-X	BTE-XXX-03-D-A	.752 [19.10] REF
-06	.8360 [21.234]	T-1S51-06-X	BTEH-XXX-03-D-X	BTE-XXX-02-D-A	.867 [22.02] REF
-07	.9542 [24.237]	T-1S61-01-F, T-1S61-01-L, T-1S54-01-H	BTEH-XXX-04-D-X	BTE-XXX-02-D-A	.9842 [25.00] REF
-08	1.1511 [29.238]	T-1S61-02-X	BTEH-XXX-04-D-X	BTE-XXX-02-D-A	1.1811 [30.00] REF
-09	.5224 [13.269]	T-1S60-09-X	BTEH-XXX-01-D-X	BTE-XXX-02-D-A	.551 [14.00] REF

FIG. 4

-FL OPTION
BTE-020-01-X-D-A-FL SHOWN
(AVAILABLE ON -01 LEAD STYLE ONLY,
-020 THRU -100 POSITIONS ONLY)
[DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1]

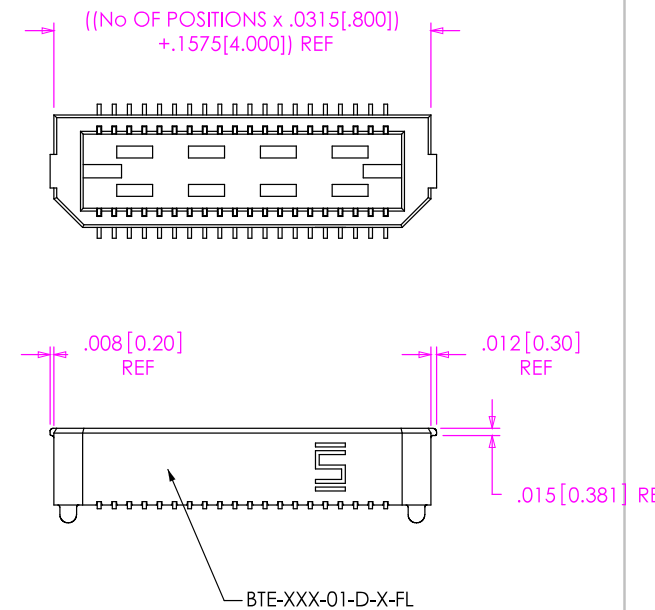

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 1.5:1

SAMTEC

520 PARK EAST BLVD, NEW ALBANY, IN 47150
* PHONE: 812.944.6733 FAX: 812.948.5047
e-Mail: INFO@SAMTEC.COM CODE: 55322

DESCRIPTION: .8mm DOUBLE ROW TERMINAL ASSEMBLY

DWG. NO. **BTE-XXX-XX-X-D-XX**

BY: DEAN P 03/22/1999 SHEET 3 OF 3