


FFMD-20-T-02.00-01-N-R

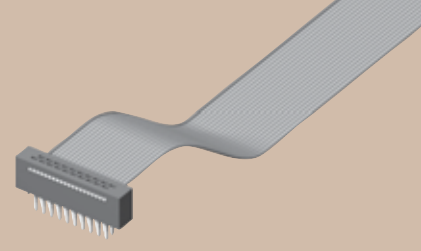

FFMD-10-S-10.00-01-RW

.050" (1,27mm) CABLE PLUG FFMD SERIES

Mates with:
FLE, SFMC

SPECIFICATIONS

For complete specifications
see www.samtec.com?FFMD

Insulator Material:

Black Glass Filled
Polyester

Terminal:

BeCu

Plating:

Sn over 50µ" (1,27µm) Ni

Wire:

30 AWG

Current Rating:


0.5A

Operating Temp Range:


-40°C to +105°C

RoHS Compliant:


Yes

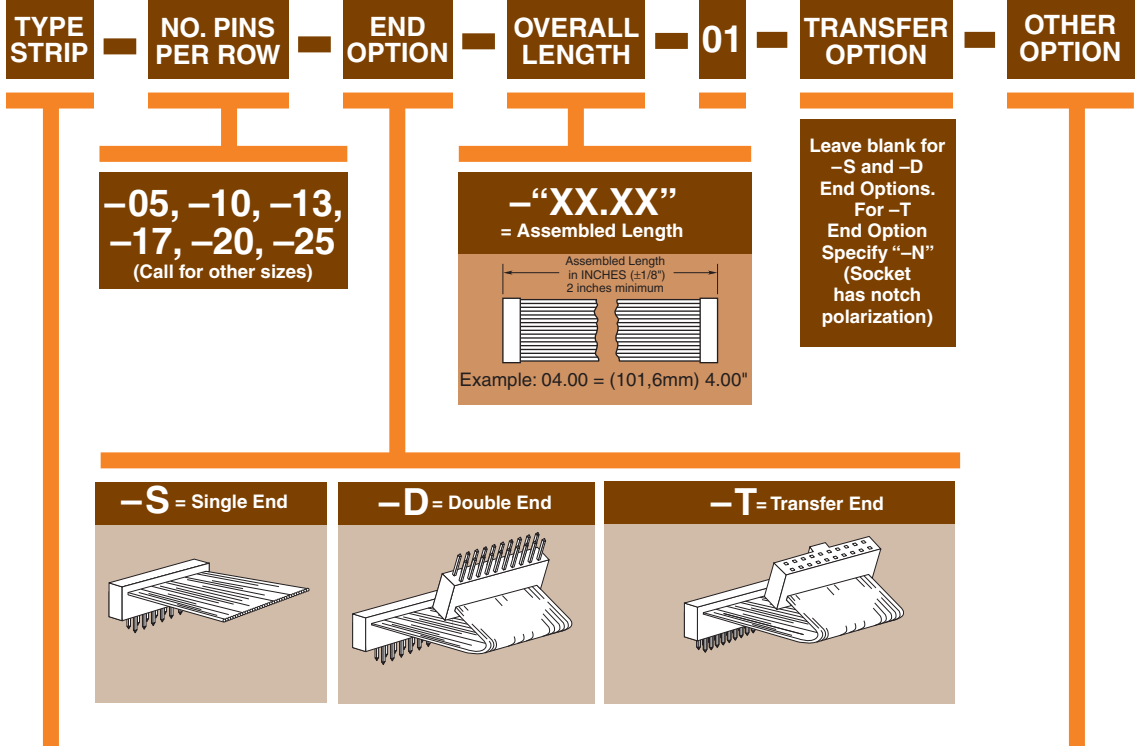

FFMD = Terminal Strip

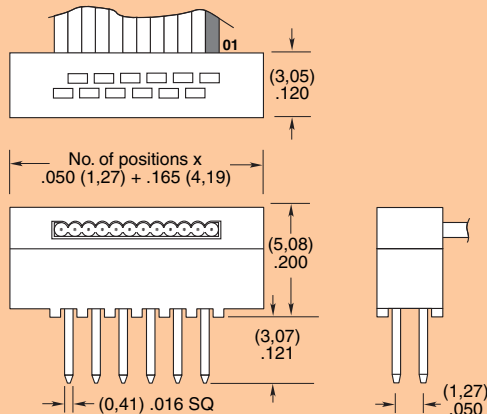

Note: This Series is
non-standard, non-returnable.

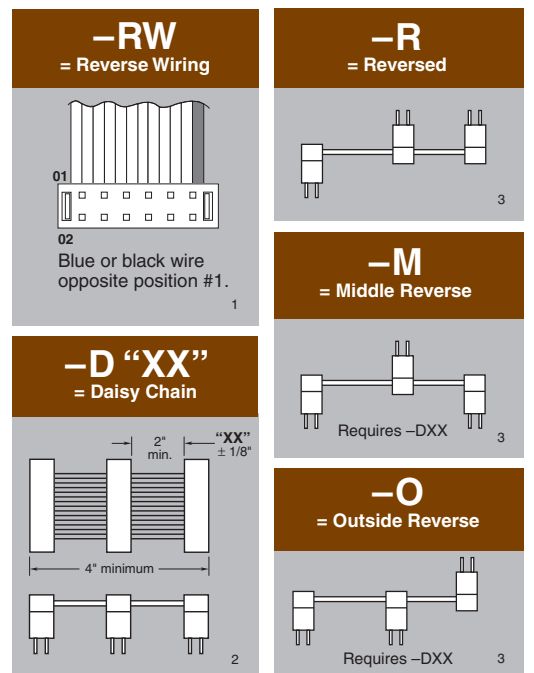

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM