



MODIFIED HEADER MTMM SERIES

SPECIFICATIONS

For complete specifications see www.samtec.com?MTMM

Insulator Material:

Black Liquid Crystal Polymer

Terminal Material:

Phosphor Bronze

Plating:

Sn or Au over 50µ" (1,27µm) Ni

Current Rating:

3A @ 80°C ambient

Operating Temp Range:

-55°C to +105°C with Tin; -55°C to +125°C with Gold

RoHS Compliant:

Yes

Processing:

Max Processing Temp:

230°C for 60 seconds, or 260°C for 20 seconds 3x

Lead-Free Solderable:


Yes



Mates with:
CLT, SQT, SQW, ESQT,
TLE, SMM, MMS, TCSD




Board Stacking

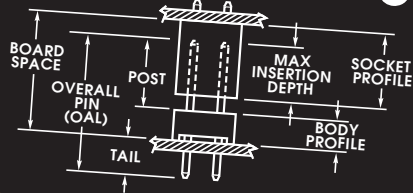


Choice of
single, double or
quad row

Specify post
height in (0,13mm)
.005" increments

ALSO AVAILABLE



Paste In Hole
(PIH) processing.
Contact Samtec
ASP Group.

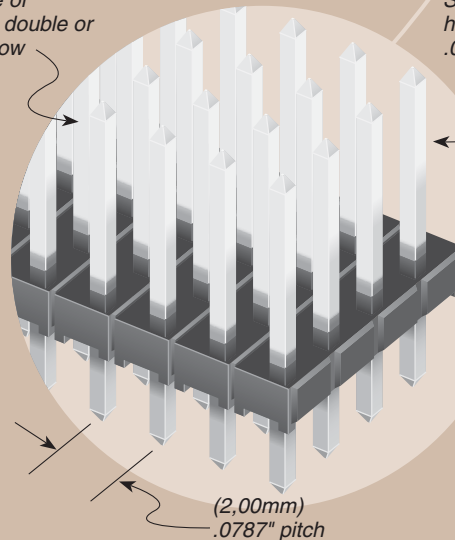

MTMM

1 NO. PINS PER ROW

LEAD STYLE




PLATING OPTION

ROW OPTION

POST HEIGHT

OPTION

01 thru 50



Specify
LEAD
STYLE
from
chart.

-L
= 10µ" (0,25µm)
Gold post, Matte
Tin on tail

-G
= 20µ" (0,51µm)
Gold post
Gold flash on tail

-T
= Matte Tin

-S
= Single
Row

-D
= Double
Row

-Q
= Quad
Row

- "XXX"
= Post Height
in inches
(0,13mm) .005"
increments
Example:
-070
= (1,78mm)
.070"

- "XXX"
= Polarized
Position
Specify
position of
omitted pin

LEAD STYLE	OAL
-02	(6,48) .255
-03	(7,67) .302
-04	(8,20) .323
-05	(9,58) .377
-06	(10,08) .397
-07	(11,58) .456
-08	(12,09) .476
-09	(13,59) .535
-10	(14,10) .555
-11	(15,09) .594
-12	(15,60) .614
-13	(17,09) .673
-14	(19,08) .751
-15	(21,08) .830

Note: Other Gold plating options available. Contact Samtec.

Note: This Series is non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 • Fax: 812-948-5047

SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0 • Fax: +49 (0) 89 / 89460-299

SAMTEC NORDIC/BALTIC • Tel: +46-84477280 • Fax: +46-87420413

SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 • Fax: 65 6841-1502

SAMTEC HONG KONG • Tel: 852-26904858 • Fax: 852-26904842

SAMTEC JAPAN • Tel: 045-475-1385 • Fax: 045-475-1340

SAMTEC KOREA • Tel: 82-31-717-5685 • Fax: 82-31-717-5681

SAMTEC SOUTH AFRICA • Tel: 27 11 452 8112 • Fax: 27 86 6714432

SAMTEC CHINA • Tel: 86-21-61103766 • Fax: 86-21-5423 4575

SAMTEC INDIA • Tel: +91-80-3272 1612 • Fax: +91-80-4152 8187

SAMTEC SILICON VALLEY • Tel: 408-395-5900 • Fax: 408-395-1520

SAMTEC FRANCE • Tel: 33 01 60 95 06 60 • Fax: 33 01 60 95 06 61

SAMTEC ITALY • Tel: 39 039 6890337 • Fax: 39 039 6890315

SAMTEC TAIWAN • Tel: 886-2-2735-6109 • Fax: 886-2-2735-5036

SAMTEC ANZ • Tel: 613 9512 7747 • Fax: 613 9512 7745

SAMTEC UK • Tel: 44 01236 739292 • Fax: 44 01236 727113

SAMTEC ITALY • Tel: 39 039 6890337 • Fax: 39 039 6890315

SAMTEC INDIA • Tel: +91-80-3272 1612 • Fax: +91-80-4152 8187

SAMTEC TAIWAN • Tel: 886-2-2735-6109 • Fax: 886-2-2735-5036

SAMTEC ANZ • Tel: 613 9512 7747 • Fax: 613 9512 7745