
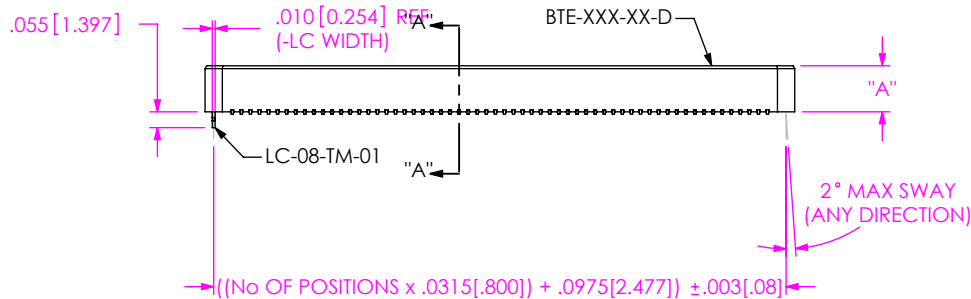



REVISION AP

DO NOT
SCALE FROM
THIS PRINT

TABLE 1					
STYLE	"A"	"B"	BODY	TERMINAL	MATED HEIGHT WITH BSE
-01	.1600[4.054] REF	.1680[4.267]	BTE-XXX-01-D	T-1S39-01-X	.1980[5.029] REF
-02	.2781[7.054] REF	.2861[7.267]	BTE-XXX-02-D	T-1S59-02-X	.3161[8.029] REF
-03	.3962[10.053] REF	.4042[10.267]	BTE-XXX-03-D	T-1S39-03-X	.4342[11.029] REF

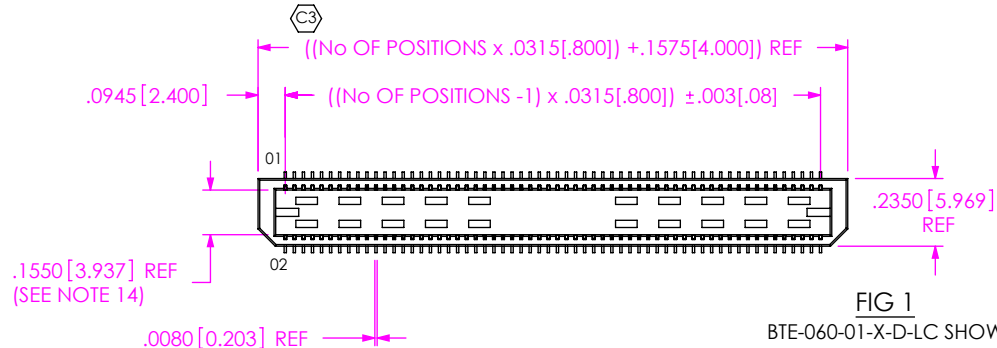

-LC: LOCKING CLIP OPTION

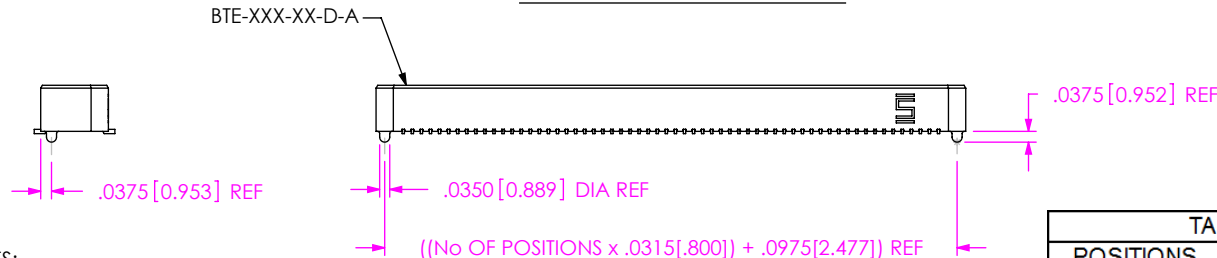

-A: ALIGNMENT PIN OPTION

NOTES:

1. Ⓢ REPRESENTS A CRITICAL DIMENSION.
2. NOTE DELETED.
3. BURR ALLOWANCE: .0015[.038] MAX.
4. NOTE DELETED.
5. MINIMUM PUSHOUT FORCE: 6 OZ.
6. NOTE DELETED.
7. PARTS TO BE MOLD TO POSITION.
8. MAX VARIANCE OF .002[.05].
9. BTE-XXX-03-D BODY CAN BE SUBSTITUTED FOR BTE-XXX-03-D-A.
10. -L PLATING CAN BE SUBSTITUTED FOR -F PLATING.
11. IF PART OPTION IS PACKAGED IN TRAY, USE K-DOT-.276-.375-.005.
12. FOR NEW APPLICATIONS REQUIRING THESE POSITIONS, PLEASE CONTACT SAMTEC INTERCONNECT PROCESSING GROUP.
13. DUE TO THE HIGH AMOUNT OF INSERTION FORCE NEEDED, THE -LC OPTION IS NOT COMPATIBLE WITH AUTO PLACEMENT. SAMTEC RECOMMENDS MANUAL PLACEMENT FOR ALL ASSEMBLIES WITH THE -LC OPTION."
14. ROW TO ROW MINIMUM IS .152 [3.86], PIN CAN EXTEND PAST WALL .003 [.08] MAX.

BTE-XXX-XX-X-D-XX

NO OF POSITIONS

-020, -040, -060,
**[-080, *-090, -100, -120]
(PER ROW)
*-03, -04 & -08 BODY STYLE ONLY
**SEE NOTE 12

BODY STYLE

-01: .1680[4.267]
-02: .2861[7.264]
-03: .4042[10.266]
-04: .6010[15.265]
-05: .7190[18.263]
-06: .8370[21.260]
-07: .9542[24.237]
-08: 1.1511[29.238]
-09: .5224 [13.269]

OPTION


-A: ALIGNMENT PINS
(USE BTE-XXX-XX-D-A)
-LC: LOCKING CLIPS(SEE NOTE 13)
(USE LC-08-TM-01)
-K: POLYIMIDE FILM
(N/A ON STYLES -07 & -08)
(USE K-500-300, SEE FIG 2)
(SEE NOTE 11)
-TR: TAPE & REEL (80 POS MAX)
(N/A ON STYLE -05, -06, -07 & -08)
-FL: FRICTION LOCK (SEE FIG 4, SHEET 3)
(USE BTE-XXX-01-D-X-FL)
(AVAIL ON LEAD STYLE -01 ONLY,
-020 THRU -100 POSITIONS ONLY)

ROW SPECIFICATION

-D: DOUBLE (USE BTE-XXX-XX-D-X
& BTEH-XXX-XX-D-X)

PLATING SPECIFICATION

-F: FLASH SELECTIVE GOLD WITH MATTE TIN TAILS (USE T-1SXX-XX-F) (SEE NOTE 10)
-L: LIGHT SELECTIVE GOLD WITH MATTE TIN TAILS (USE T-1SXX-XX-L) (SEE NOTE 10)
-H: HEAVY GOLD (USE T-1SXX-XX-H)
-C: ELECTRO-POLISHED SELECTIVE (USE T-1SXX-XX-C)

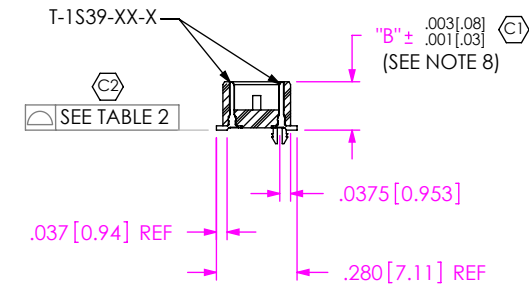

SECTION "A"- "A"

TABLE 2	
POSITIONS	COPLANARITY
-20 THRU -60	.004[.10]
-80 THRU -120	.006[.15]

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES.

TOLERANCES ARE:

DECIMALS ANGLES
.XX: ±.01 [.3] 2°
.XXX: ±.005 [.13]
.XXXX: ±.0020 [.051]

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.

MATERIAL: DO NOT SCALE DRAWING SHEET SCALE: 1:5:1
INSULATOR: LCP, COLOR: BLACK, FLAMMABILITY RATING: UL94VO
TERMINAL: PHOS BRONZE

AP

F:\DWG\MISC\MKTG\BTE-XXX-XX-X-D-XX-MKT.SLDDRW

samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code 55322

DESCRIPTION:
.8mm DOUBLE ROW TERMINAL ASSEMBLY

DWG. NO. BTE-XXX-XX-X-D-XX

BY: DEAN P 03/22/1999 SHEET 1 OF 3

FIG 2
-K: POLYIMIDE FILM PAD
[USE K-500-300]
(SEE NOTE 11)


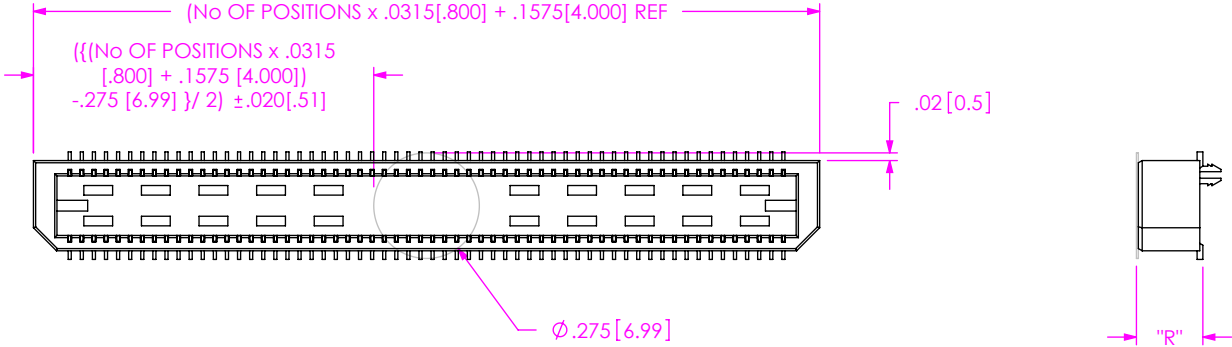


TABLE 3	
STYLE	"R"
-01	.173 [4.39]
-02	.291 [7.39]
-03	.409 [10.39]
-04	.610 [15.49]
-05	.728 [18.49]
-06	.843 [21.41]
-09	.535 [13.60]

PACKAGING VIEW

[PARTS NEED TO BE LOADED PER PACKAGING VIEWS]
[-05 LEADSTYLE PARTS WITH KAPTON TO BE
LOADED WITH KAPTON RESTING ON THE TUBE RIBS].

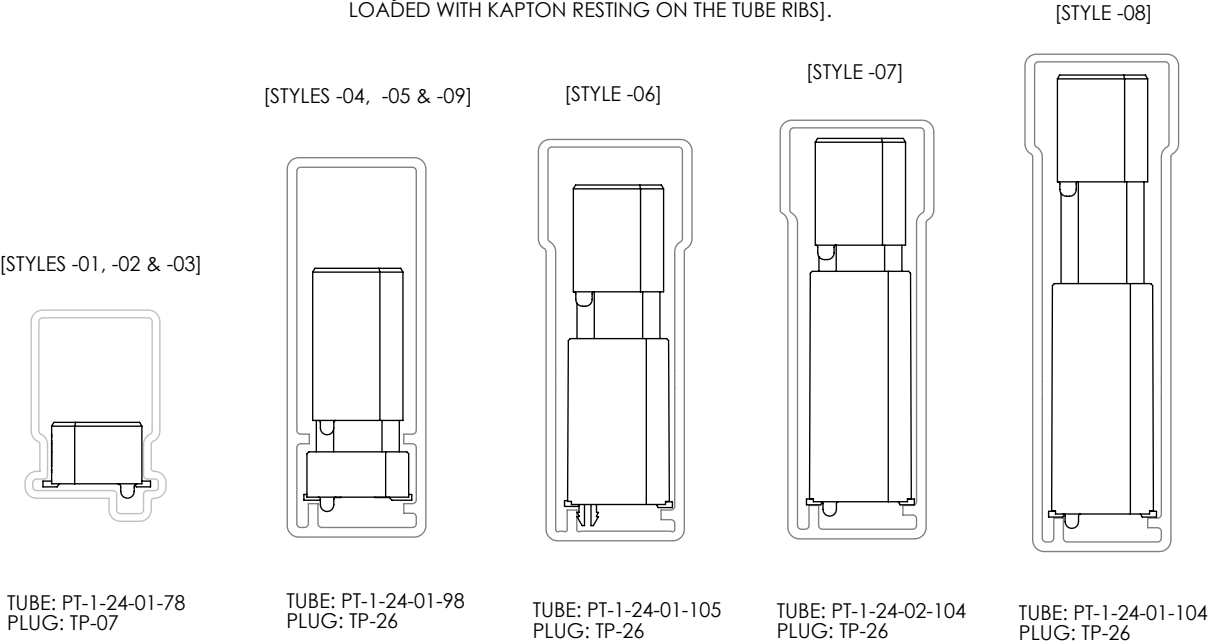

PACKAGING TABLE		
STYLE	PACKAGING TUBE	PLUG
-01	PT-1-24-01-78	TP-07
-02		
-03		
-04	PT-1-24-01-98	TP-26
-05		
-06		
-07	PT-1-24-02-104	
-08	PT-1-24-01-104	
-09	PT-1-24-01-98	TP-26

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 2:1

F:\DWG\MISC\MKTG\BTE-XXX-XX-X-D-XX-MKT.SLDDRW

samtec


520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail info@SAMTEC.com code 55322

DESCRIPTION:
.8mm DOUBLE ROW TERMINAL ASSEMBLY

DWG. NO.
BTE-XXX-XX-X-D-XX

BY: DEAN P 03/22/1999 SHEET 2 OF 3

BTE-060-06-X-D-LC SHOWN
[DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 1]

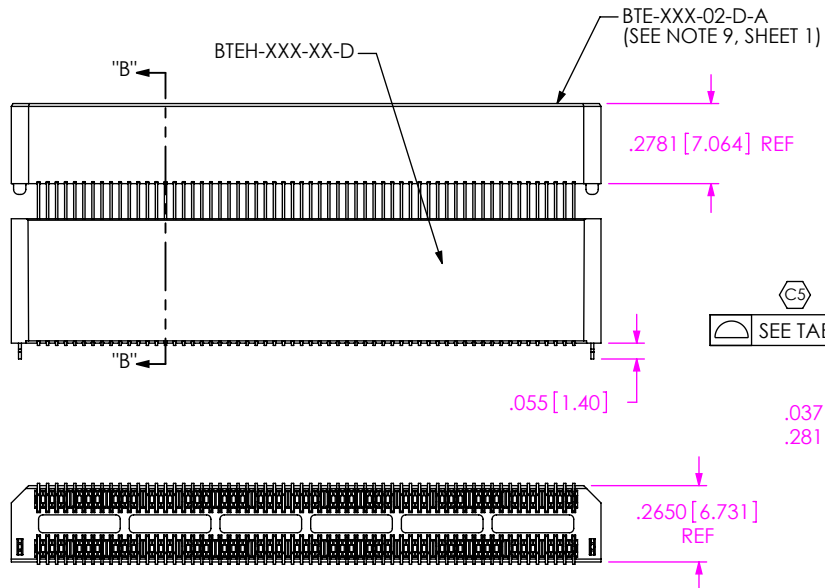


A cross-sectional view of a device. The top layer is labeled BTEH-XXX-XX-D-A. Below it is a middle layer containing a series of vertical structures. The bottom layer is labeled BTE-XXX-XX-D-A and contains a grid of small dots.

Technical drawing of a mechanical part. A dimension line indicates a width of .0525 [1.334] REF.

TABLE 4				MATED HEIGHT WITH BSE	
STYLE	"C"	TERMINAL	BOTTOM BODY	TOP BODY	
-04	.6010 [15.265]	T-1S41-04-X	BTEH-XXX-01-D-X	BTE-XXX-03-D-A	.634 [16.10] REF
-05	.7190 [18.263]	T-1S41-05-X	BTEH-XXX-01-D-X	BTE-XXX-03-D-A	.752 [19.10] REF
-06	.8370 [21.260]	T-1S51-06-X	BTEH-XXX-03-D-X	BTE-XXX-02-D-A	.867 [22.02] REF
-07	.9542 [24.237]	T-1S61-21-F, T-1S61-21-L, T-1S61-21-H	BTEH-XXX-04-D-X	BTE-XXX-02-D-A	.9842 [25.00] REF
-08	1.1511 [29.238]	T-1S61-22-X	BTEH-XXX-04-D-X	BTE-XXX-02-D-A	1.1811 [30.00] REF
-09	.5224 [13.269]	T-1S60-09-X	BTEH-XXX-01-D-X	BTE-XXX-02-D-A	.5501 [14.00] REF

-FL OPTION
BTE-020-01-X-D-A-FL SHOWN
(AVAILABLE ON -01 LEAD STYLE ONLY,
-020 THRU -100 POSITIONS ONLY)
[DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 1]

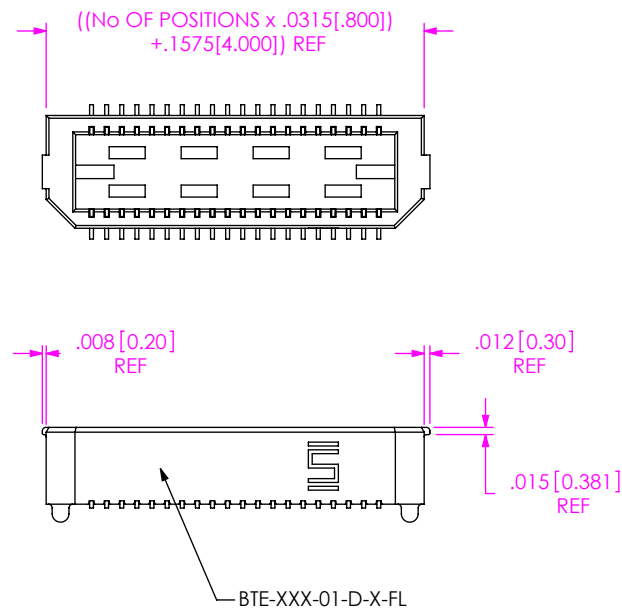

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.

SHEET SCALE: 1.5:1

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail info@SAMTEC.com code 55322

DWG. NO. BTE-XXX-XX-X-D-XX

BY: DEAN P	03/22/1999	SHEET 3 OF 3
------------	------------	--------------