


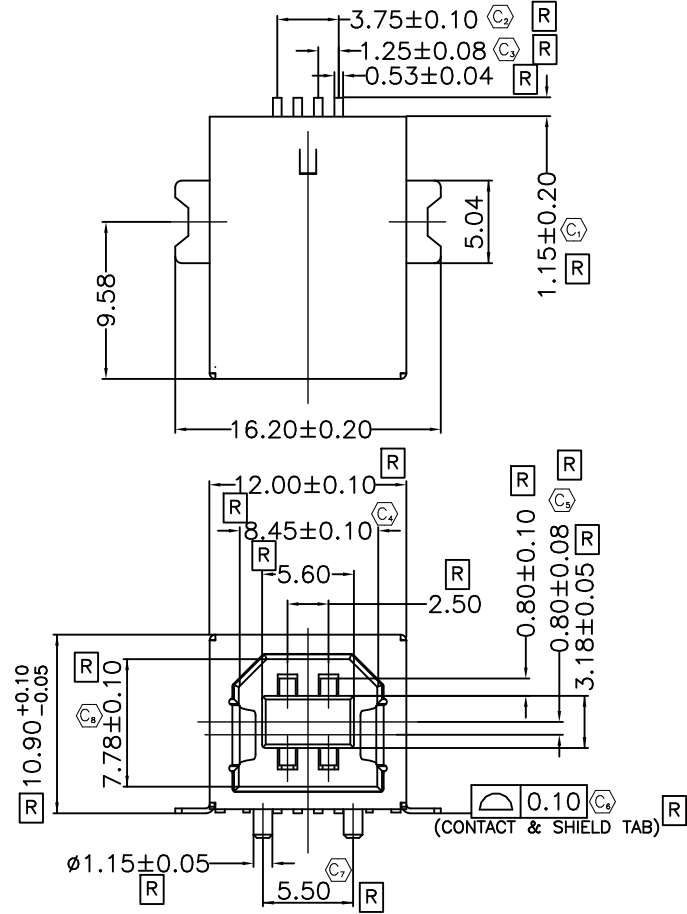

USB-B-S-X-X-SM-X-XX



TYPE
-B

CONFIGURATION
-S: SINGLE

PLATING
-F: 3u" FLASH GOLD IN CONTACT AREA, MATTE TIN ON TAIL
-S: 30u" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL


OPTIONS
-TR: TAPE AND REEL (LEAVE BLANK FOR TRAY PACKAGING)
E & I OPTIONS
-R: ROHS COMPLIANT-LEAD FREE WITH HIGH TEMP INSULATOR
RA TERMINATION
-SM: SURFACE MOUNT

COLOR
-B: BLACK
-W: WHITE

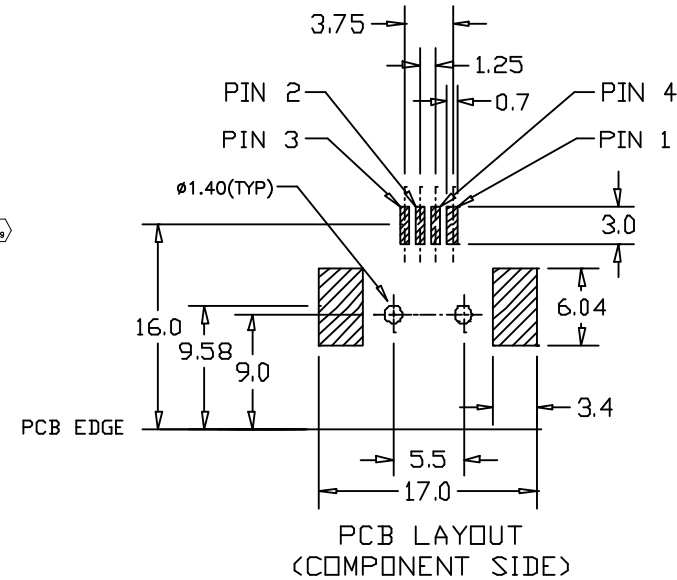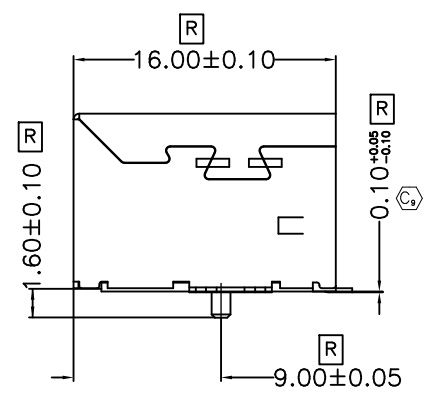


NOTES:

1. (C) REPRESENTS CRITICAL DIMENSION.
2. NOTE DELETED.

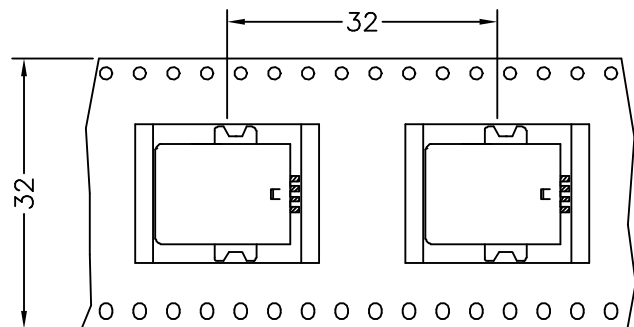

USER DIRECTION OF UNREELING →
POCKET NOT DETAILED

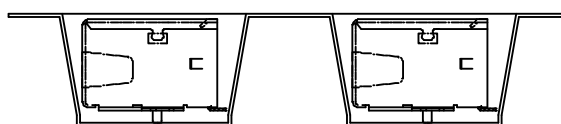

PACKAGING VIEW

(R) UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE MILLIMETERS. TOLERANCES ARE: DECIMALS: .X: $\pm .25$, .XX: $\pm .13$, .XXX: $\pm .050$ ANGLES: 2° DO NOT SCALE DRAWING INSULATOR: PA9T (RATED UL94V-0) CONTACT: PHOS BRONZE SHELL: STEEL/NICKEL PLATED MAX FLASH ALLOWED: .051 MAX GATE VESTIGE: .051 F:\DWG\EXISPROD\ASSEMBLY\ID\USB\	PROPRIETARY NOTE THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC INC.	samtec 520 PARK EAST BLVD. NEW ALBANY, IN 47150 (812) 944-6733 P.O. BOX 1147 TWX: 810-540-4085	CODE: 55322	
	SHEET SCALE: 1:2	DESCRIPTION: USB TYPE B RIGHT ANGLE SURFACE MOUNT		
		DWG. NO. USB-B-S-X-X-SM-X-XX		
		BY: J. Riley 02/06/04	SHEET 1 OF 1	