





DO NOT SCALE FROM THIS PRINT

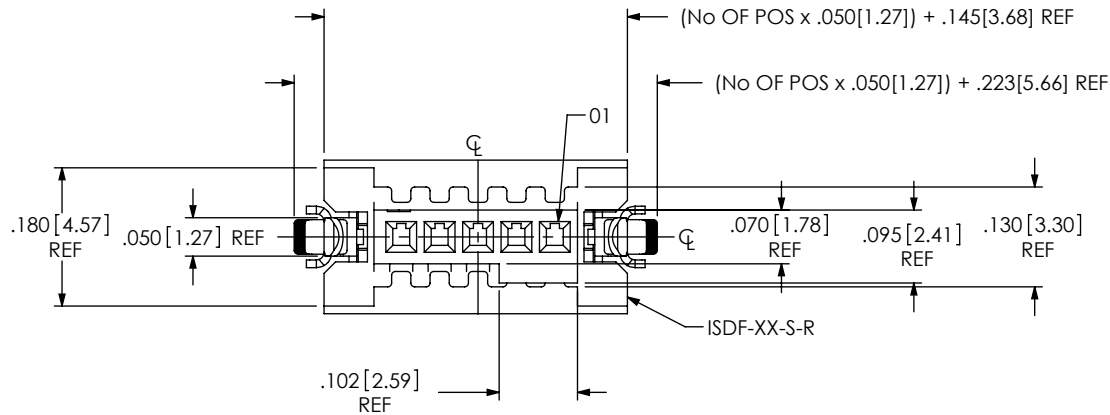


ISDF-XX-S-X

No OF POSITIONS
-02 THRU -50


METAL RETENTION LATCH
(LEAVE BLANK FOR NO LATCH)
-M: METAL RETENTION LATCH
ROW SPECIFICATION
-S: SINGLE (USE ISDF-XX-S-R)

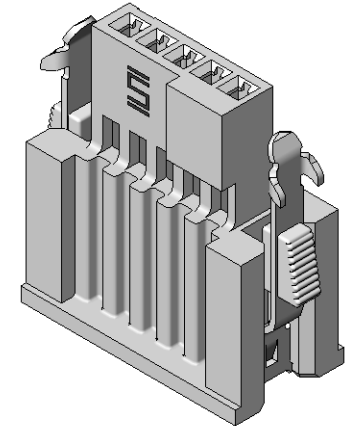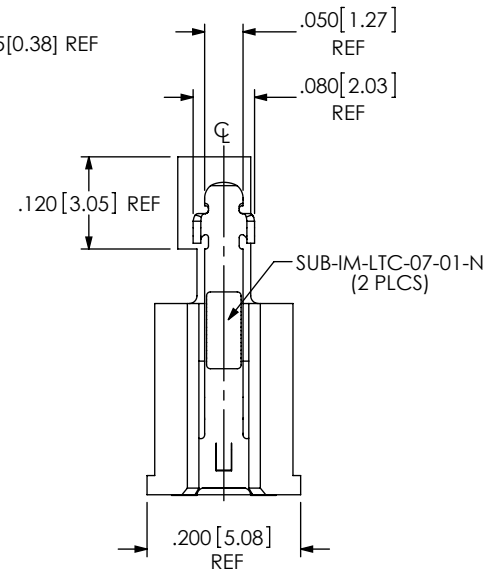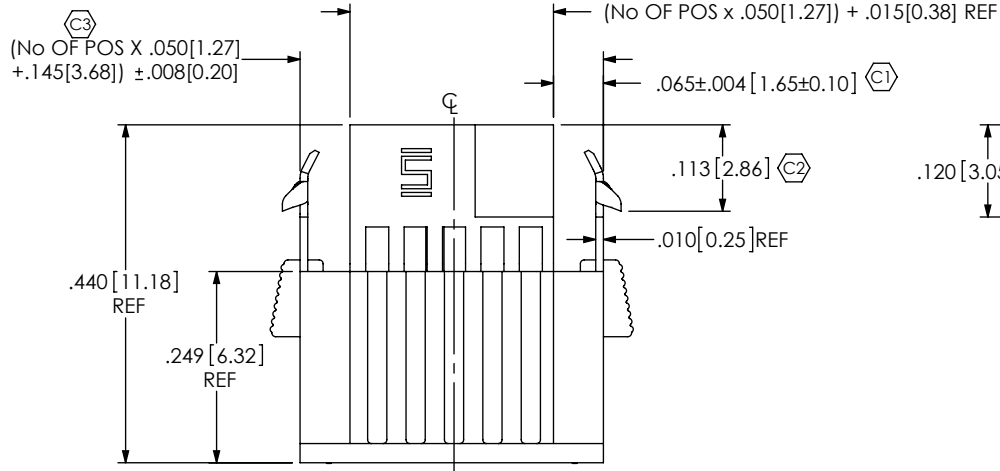

PACKAGING VIEW



TUBE: PT-1-24-02-44
PLUG: TP-03



POSITIONS -02 AND -03
TUBE: PT-1-24-05-29
PLUG: TP-03

NOTES:

1. C3 REPRESENTS A CRITICAL DIMENSION.
2. LATCH RETENTION FORCE: .5 LB [2.22N].
3. PARTS TO BE PACKAGED IN TUBES.

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES.
TOLERANCES ARE:
DECIMALS ANGLES
.XX: ±.01 [.3] 2°
.XXX: ±.005 [.13]
.XXXX: ±.0020 [.051]

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.



520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code 55322

MATERIAL: DO NOT SCALE DRAWING SHEET SCALE: 2:1

INSULATOR: LCP, UL 94V-0, COLOR: BLACK
LATCH: NICKEL-PLATED PHOS BRONZE
BUTTON: NYLON, COLOR: WHITE

DESCRIPTION:
.050[1.27] DISCRETE WIRE INSULATOR & LATCH ASM

DWG. NO. ISDF-XX-S-X

BY: GAYNOR 6/18/2008 SHEET 1 OF 1