

## **Optimus.2 Eco 2.5" SAS SSD Product Line**

Part Number: 80-11-80008

## Disclaimer

The SanDisk® Corporation general policy does not recommend the use of its products in life support applications wherein a failure or malfunction of the product may directly threaten life or injury. Without limitation to the foregoing, SanDisk shall not be liable for any loss, injury, or damage caused by use of its products in any of the following applications:

- Special applications such as military related equipment, nuclear reactor control, and aerospace.
- Control devices for automotive vehicles, train, ship and traffic equipment.
- Safety systems for disaster prevention and crime prevention.
- Medical-related equipment (including medical measurement devices).

Accordingly, in any use of SanDisk products in life support systems or other applications where failure could cause damage, injury or loss of life, the products should only be incorporated in systems designed with appropriate redundancy, fault tolerant or back-up features. Per SanDisk Terms and Conditions of Sale, the user of SanDisk products in life support or other such applications assumes all risk of such use and agrees to indemnify, defend, and hold harmless SanDisk Corporation and its affiliates against all damages.

Security safeguards, by their nature, are capable of circumvention. SanDisk cannot, and does not, guarantee that data will not be accessed by unauthorized persons, and SanDisk disclaims any warranties to that effect to the fullest extent permitted by law.

This document and related material are for information use only and are subject to change without prior notice. SanDisk Corporation assumes no responsibility for any errors that may appear in this document or related material, nor for any damages or claims resulting from the furnishing, performance or use of this document or related material. Absent a written agreement signed by SanDisk Corporation or its authorized representative to the contrary, SanDisk Corporation explicitly disclaims any express and implied warranties and indemnities of any kind that may or could be associated with this document and related material, and any user of this document or related material agrees to such disclaimer as a precondition to receipt and usage hereof. EACH USER OF THIS DOCUMENT EXPRESSLY WAIVES ALL GUARANTIES AND WARRANTIES OF ANY KIND ASSOCIATED WITH THIS DOCUMENT AND/OR RELATED MATERIALS, WHETHER EXPRESSED OR IMPLIED, INCLUDING WITHOUT LIMITATION, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR INFRINGEMENT, TOGETHER WITH ANY LIABILITY OF SANDISK CORPORATION AND ITS AFFILIATES UNDER ANY CONTROL, NEGLIGENCE, STRICT LIABILITY OF SANDISK CORPORATION AND ITS AFFILIATES UNDER ANY CONTRACT, PROFIT OR OTHER INCIDENTAL, PUNITIVE, INDIRECT, SPECIAL OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION PHYSICAL INJURY OR DEATH, PROPERTY DAMAGE, LOST DATA, OR COSTS OF PROCUREMENT OF SUBSTITUTE GOODS, TECHNOLOGY OR SERVICES.

No part of this document may be reproduced, transmitted, transcribed, stored in a retrievable manner or translated into any language or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual or otherwise, without the prior written consent of an officer of SanDisk Corporation.

All parts of the SanDisk documentation are protected by copyright law and all rights are reserved. SanDisk and the SanDisk logo are registered trademarks of SanDisk Corporation, registered in the United States and other countries. Other brand names mentioned herein are for identification purposes only and may be the trademarks of their respective holder(s). Copyright 2014 SanDisk Corporation. All rights reserved.

## ESD Caution – Handling

Static electricity may be discharged through this disk subsystem. In extreme cases, this may temporarily interrupt the operation or damage components. To prevent this, make sure you are working in an ESD-safe environment. For example, before handling the disk subsystem, touch a grounded device, such as a computer case.



## Revision History Table

Date	Revision	Section(s)	Description
March 2014	A	All	Initial release.

## Table of Contents

<b>Contents</b>	<b>Page</b>
<b>1.0 General Description</b>	<b>4</b>
1.1 Overview	4
1.2 Features	5
1.3 Unique Features	6
1.4 Operational Characteristics	7
1.4.1 Performance	7
1.4.2 Reliability	7
1.4.3 Power	7
1.5 Environmental Conditions	8
1.5.1 Physical Specifications	9
1.5.2 15 mm Thickness	9
<b>2.0 Product Description</b>	<b>10</b>
2.1 Functional Block Diagram	10
2.2 Flash Management	11
2.3 Endurance	11
2.3.1 Aggregated Flash Management	11
2.3.2 Advanced Signal Processing	12
2.4 Temperature Throttling	12
2.5 Sector Sizes	13
2.6 Mean Time Between Failures (MTBF)	13
2.7 Regulatory Standards Compliance	13
<b>3.0 Mechanical Specifications</b>	<b>14</b>
3.1 9.5 mm Thickness	14
3.2 15 mm Thickness	15
<b>4.0 Electrical Specification</b>	<b>16</b>
4.1 Electrical Interface	16
4.1.1 Optimus.2 Eco Interface Connector	16
4.1.2 Signal Pinout Descriptions	16
4.1.3 Power Pinout Descriptions	17
4.1.4 Dual-Port	17
4.2 Remote LED	17
4.3 Thermal Sensor	17
4.4 Absolute Maximum Ratings	18
4.5 Recommended Operating Conditions	18
4.6 DC Characteristics	18

## Table of Contents

<b>Contents</b>	<b>Page</b>
<b>5.0 SCSI Sense Code Key</b> .....	<b>19</b>
5.1 Sense Data .....	19
5.2 SCSI Commands .....	23
5.2.1 Supported SCSI Commands .....	23
5.3 Security Erase Support .....	24
5.4 Supported SMART Operations .....	24
5.5 Log Pages .....	25
5.6 SMART Attributes .....	26
5.7 Warranty .....	26
<b>6.0 Part Number</b> .....	<b>27</b>
6.1 Part Numbering Information .....	27

# 1.0 GENERAL DESCRIPTION

## 1.1 Overview

The SanDisk Optimus.2 Eco solid state drive (SSD) ushers in a new era of flash storage, bringing together the industry's best combination of performance, capacity, endurance and reliability, while using the most cost-effective flash available. This combination makes the Optimus.2 Eco SSD the ideal solution for a wide variety of enterprise applications, including the custom built hyper-scale architectures many organizations are developing on their own by combining best-in-class hardware and software.

OEMs and IT managers no longer have to compromise on performance, endurance, and reliability to obtain affordability. The Optimus.2 Eco SSD offers all four in a single package through a combination of the Guardian Technology Platform, SanDisk's unique and innovative IP, and the use of the SanDisk 19 nm Multi-Level Cell (MLC) flash.

Available in capacities of 400 GBytes, 800 GBytes, 1.6 TBytes and 2 TBytes, the Optimus.2 Eco SSD is designed for the mixed workloads common in enterprise applications and delivers the endurance required to last for the full five year warranty. The Optimus.2 Eco SSDs also includes a broad set of enterprise reliability, security, and data recovery features, giving OEMs and IT managers the confidence their data will not be compromised during any common data center occurrence.

The Optimus.2 Eco SSD is powered by the SanDisk proprietary Guardian Technology Platform, a comprehensive suite of innovative features comprised of FlashGuard™, and EverGuard™ technologies.

FlashGuard extends the native endurance of 19nm consumer-grade MLC flash based SSDs to deliver 3-7 drive writes per day (DWPD), depending on workload, for a period of five years. FlashGuard combines Aggregated Flash Management, which treats all flash elements as a single system, and Advanced Signal Processing, which dynamically adjusts flash parameters throughout the life of the SSD, to reliably extract significantly more life from the most cost-effective MLC flash, making it suitable for mixed workload enterprise applications.

DataGuard features full data path protection, safeguarding user data from corruption along all data paths in the SSD. DataGuard also protects the SSD against loss of data at the page and block levels using a unique feature called Flexible Redundant Array of Memory Elements (FRAME). The FRAME feature acts as a data recovery feature that enables the recovery of user data even after catastrophic events such as flash page or block failures.

EverGuard protects against loss of user data in the event of unexpected power interruptions using a third-generation backup power circuit design and high-reliability discrete capacitors.

SanDisk has built its foundation by providing proven technology featuring quality products to the most demanding Fortune 100 OEMs. SanDisk engineers its products to perform at the highest degree of reliability and compatibility while backing these products with outstanding services and expertise.

## 1.2 Features

- Type: 2.5" SAS SSD
- Interface: Dual-Port Serial Attached SCSI-2
- Supported Transport Mode: Serial SCSI Protocol (SSP)
- Interface Transfer Rate: 6 Gbits/sec standard
- Capacities: 400 GBytes, 800 GBytes, 1.6 TBytes, and 2.0 TBytes
- Data Rates
  - ◆ Sequential Write:<sup>1</sup> Up to 500 MBytes per sec
  - ◆ Sequential Read:<sup>1</sup> Up to 500 MBytes per sec
  - ◆ Random Write:<sup>2</sup> Up to 35,000 I/Os per sec
  - ◆ Random Read:<sup>2</sup> Up to 95,000 I/Os per sec
- Access Time:<sup>2</sup> 120 µsecs (typical)
- Operating Temperature:<sup>3</sup> 0 °C to 70 °C (internal)
- Compliance
  - ◆ RoHS
  - ◆ Halogen-Free
- Warranty: 5 Years

1. Based on 128 KByte transfers.

2. Based on 4 KByte transfers.

3. As measured by the drive thermal sensor.

### 1.3 Unique Features

- Drive-Specific SMART Attributes
- Maximum 5% Performance Degradation Throughout Warrantied Life
- Full Drive Writes Per Day (DWPD)
  - ◆ Random Workload: 3 DWPD
  - ◆ Sequential Workload: 7 DWPD
- FlashGuard Technology
  - ◆ Extension of the Native Endurance of Commercial MLC Flash
  - ◆ Aggregated Flash Management
  - ◆ Advanced Signal Processing
  - ◆ Enhanced Error Correction
- DataGuard Technology
  - ◆ Protection Against Data Corruption and Loss
  - ◆ Full Data Path Protection
  - ◆ FRAME Technology
  - ◆ EverGuard Technology
  - ◆ Data Protection in the Event of Unanticipated Power Outages
  - ◆ High-Reliability Backup Power Circuitry
- External LED Activity Support
- Temperature Throttling
- Variable Sector Sizes (512 and 520 Bytes)

## 1.4 Operational Characteristics

All listed values are typical unless otherwise stated.

### 1.4.1 Performance

**Table 1: Performance Characteristics**

Item	Optimus.2 Eco Performance
Sequential Read (Maximum)	Up to 500 MBytes/sec <sup>4</sup>
Sequential Write (Maximum)	Up to 500 MBytes/sec <sup>4</sup>
Random Read I/Os Per Second (Maximum)	Up to 95,000 <sup>5</sup>
Random Write I/Os Per Second (Maximum)	Up to 35,000 <sup>5</sup>
Access Time	120 $\mu$ sec (typical) <sup>5</sup>

### 1.4.2 Reliability

**Table 2: Reliability Characteristics**

Item	Value
Data Reliability	< 1 unrecovered error in 10 <sup>17</sup> bits read <sup>6</sup>
Data Retention	3 months @ 100% P/E cycles <sup>7</sup>
Endurance (400 GBytes, 800 GBytes, 1.6 TBytes)	3 -7 DWPD (Random/Sequential Workload) for 5 years
Endurance (2.0 TBytes)	1 - 6 DWPD (Random/Sequential Workload) for 5 years

### 1.4.3 Power

**Table 3: Power Requirements**

Parameter	Value (Typical)	Value (Max)	Unit
Read	4.57	7.24	W
Write	6.21	9.00	W
Idle	3.44	3.70	W

4. Based on 128 KByte transfers.

5. Random performance values are based on 4 KByte transfers.

6. The JEDEC 64.8 specification requires 1 in 10<sup>16</sup> for enterprise-class SSDs.

7. Three-month data retention is based on non-operational storage at less than 40 °C.

## 1.5 Environmental Conditions

Table 4: Environment Tests

Test	Condition	Limits
Altitude	Operating	-1000 feet to 18,000 feet
	Shipping	-0 feet to 40,000 feet
	Storage	-0 feet to 40,000 feet
Temperature and Humidity	Operating	Temperature: 0 °C to + 70 °C (internal) Humidity: 5% to 95% non-condensing, relative humidity <b>NOTE:</b> Warranty coverage is voided for drives that record temperatures in excess of 70 °C.
	Shipping/Storage	Temperature: -40 °C to + 85 °C Humidity: 5% to 95% non-condensing, relative humidity <b>NOTE:</b> Non-operational exposure to temperatures in excess of 40 °C for periods exceeding three months should be avoided. The three-month EOL data retention specification requires storage temperatures do not exceed 40 °C. If necessary, contact SanDisk for further information.
Vibration - Swept Sine	Operating	5.0 - 400 Hz sine, 1.0 g peak 5 - 300 Hz and 0.5 g peak 300 - 400 Hz for each [x,y,z] axis; sweep 1.0 g peak 5 - 300 Hz and 0.5 g peak 300 - 400 Hz; sweep rate is 0.5 Hz sec @ 26 min per axis
	Non-Operating	2.0 - 200 Hz sine, 0.5 g peak 2 - 5 Hz and 3.0 g peak 5 - 200 Hz for each [x,y,z] axis; sweep 0.4 g peak 2.0 - 2.3 Hz, 0.5 g peak 2.3 - 5.0 Hz, 2.42 g peak 5.0 - 5.6 Hz, and 3.0 g peak 5.6 - 200 Hz; sweep rate is 0.4 decades per min @ 10 min per axis
Shock	Operating	15 g @ 11.0 msec 400 g @ 2.0 msec 1000 g @ 0.5 msec
	Non-Operating	35 g @ 20.0 msec 80 g @ 11.0 msec 150 g @ 10.0 msec 500 g @ 2.0 msec
Common Mode Noise		220 mV, 10 KHz - 10 MHz
V <sub>cc</sub> Ripple Noise		50 mV, 10 KHz - 50 KHz 100 mV, 50 KHz - 10 MHz

## 1.5.1 Physical Specifications

**Table 5: 9.5 mm Physical Characteristics**

Parameter	Value
Length	99.80 ± 0.25 mm
Width	69.60 ± 0.25 mm
Height (Mounted)	9.24 ± 0.25 mm
Weight (Typical)	99.3 g [3.5 oz]

## 1.5.2 15 mm Thickness

**Table 6: 15 mm Physical Characteristics**


Parameter	Value
Length	100.20 ± 0.25 mm
Width	69.85 ± 0.25 mm
Height (Mounted)	14.75 ± 0.25 mm
Weight (Typical)	153.40 g [5.4 oz]

## 2.0 PRODUCT DESCRIPTION

### 2.1 Functional Block Diagram

The Optimus.2 Eco 2.5" SAS SSDs contain a NAND flash controller that provides a 6 Gb/s SAS interface to the host system. Parallel access to multiple flash sites allows overlapped, multi-block access to complete data transfer requests rapidly. A thermal sensor provides input to the controller regarding over-temperature conditions. EverGuard Technology ensures data integrity during power fail scenarios.

Figure 1: Optimus.2 Eco SAS Product Family Functional Block Diagram

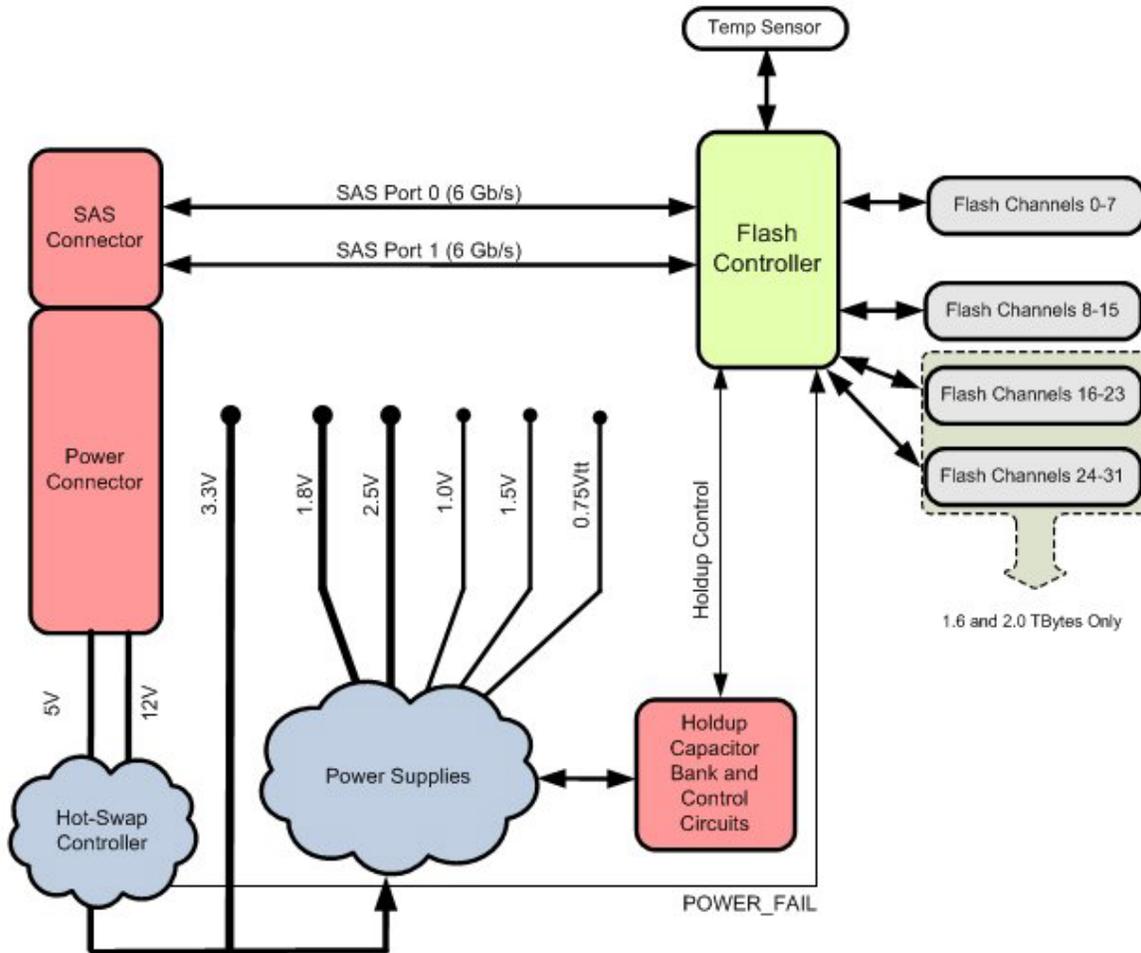

## 2.2 Flash Management

The Optimus.2 Eco 2.5" SAS SSDs support the following techniques for enhanced flash management:

- **Static Wear Leveling:** This feature eliminates overstressing flash media by spreading the data writes across all flash physical address space, including logical areas that are not written by the user.
- **ECC:** The Optimus.2 Eco 2.5" SAS SSDs utilize advanced two-level BCH code and a Flexible Redundant Array of Memory Elements (FRAME) data recovery algorithm. The drive activates this second tier of error correction if the ECC engine is unable to correct the data located in failed NAND pages.
- **Bad Block Management:** This feature tracks all manufacturing and run-time bad blocks of flash media and replaces them with new ones from the spare pool.
- **Data Retention Management:** As flash is used over the life of the drive, data retention capability declines. The Optimus.2 Eco 2.5" SAS SSDs incorporate multiple data-retention management techniques to ensure the highest data reliability and integrity, even towards the end of the drive life.
- **Minimal Write Amplification:** Write amplification is defined as the ratio of total data written to the flash compared to the total data written by the host. This ratio varies continually as a function of workload. The Optimus.2 Eco 2.5" SAS controller utilizes write optimization, effective wear leveling, intelligent bad block management, and efficient recycling to deliver an unprecedented, low write amplification factor. This translates directly to higher and more stable performance over a longer life.

## 2.3 Endurance

The Optimus.2 Eco 2.5" SAS SSDs provide the innovative FlashGuard technology feature to extract higher endurance from MLC flash. FlashGuard incorporates two important technology breakthroughs in the area of flash and SSD system management:


- ◆ Aggregated Flash Management
- ◆ Advanced Signal Processing

### 2.3.1 Aggregated Flash Management

SanDisk's Aggregated Flash Management technology prolongs the life of SSDs by treating all flash elements in the SSD as a system instead of as a collection of discrete elements. Aggregating the management of the flash over multiple pages within a block and over multiple blocks within the SSD reduces the limitations imposed at the page and block levels, thus extending the life of the drive.

FlashGuard treats each flash cell individually, thereby maximizing the effects of stronger flash elements (i.e., those that exhibit higher performance capability) while minimizing the effects of weaker elements. The capability of FlashGuard to distinguish between, and take advantage of, flash elements at the cellular level extends the endurance of the drive. See page [12](#) for an illustration.

Figure 2: Optimus.2 Eco 2.5" SAS Product Family Increased SSD Endurance

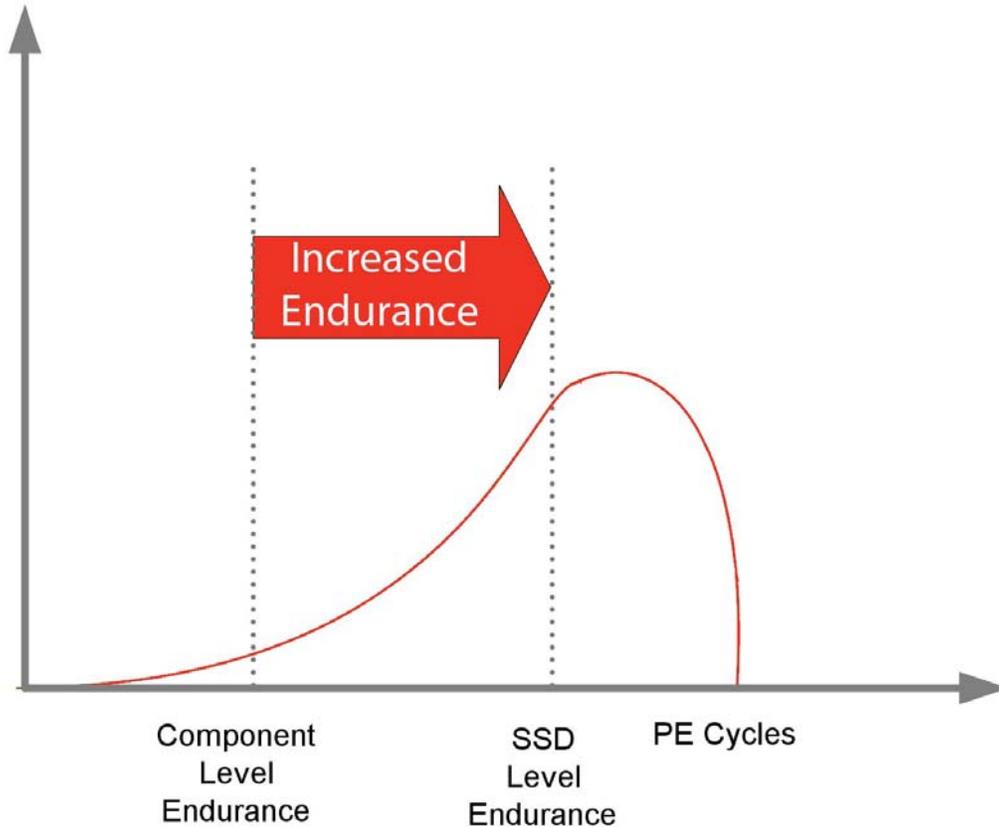

### 2.3.2 Advanced Signal Processing

The controller's Advanced Signal Processing technology is used to periodically monitor the flash and collect detailed statistics of its performance. This information is used to dynamically adjust the flash operating parameters to attain maximum endurance from the drive throughout its operational life. To further extend the life of the drive, FlashGuard incorporates a proprietary enhanced error correction technology that corrects more data errors than is possible with standard error correction schemes.

## 2.4 Temperature Throttling

The Optimus.2 Eco 2.5" SAS SSDs support temperature throttling to protect the drive from premature failure. With this feature, the drive throttles the write performance based on a pre-configured temperature level of 65 °C.

When the critical temperature (65 °C) is reached, the drive returns a sense key of 01/0B to indicate a threshold was exceeded and records the data to the Informational Exceptions log page (2Fh). Write performance remains throttled until the temperature falls below 65 °C. See page [19](#) for more information about log pages. If the drive reaches 70 °C, a SMART trip will occur, voiding the warranty.

<b>NOTE:</b>	The throttling level varies on the current workload.
--------------	--

## 2.5 Sector Sizes

Because the Optimus.2 Eco SSD supports variable sector sizes, the formatted number of blocks differs depending on the sector size. By default, the block size is set to 512 bytes, but the drive can be configured for 520-byte blocks.

## 2.6 Mean Time Between Failures (MTBF)

The MTBF statistic for all Optimus.2 Eco 2.5" SAS SSDs is calculated based on the MIL-HDBK-217 standard.

Table 7: MTBF Value

Drive Capacity	MTBF (Hours)
All	2,500,000

## 2.7 Regulatory Standards Compliance

The Optimus.2 Eco 2.5" SAS SSDs meet all regulatory, safety, and electromagnetic compatibility (EMC) standards listed in the following table.


Table 8: Regulatory Compliance

Category	Country	Compliance/Agency	Standard	Additional Information
Safety	USA	UL	UL 60950-1, Second Edition	UL File No. E351027
	Canada	CSA	CSA C22.2 No. 60950-1-07, Second Edition	CSA Certificate
	European Union	EU Directive 2006/95/EC (LVD)	EN 60950-1:2006/A11	TÜV Bauart Certificate
	International	UL	IEC 60950-1:2005, Second Edition	UL CB Certificate
EMC	USA	FCC	FCC Part 15 Class B	FCC Declaration of Conformity
	Canada	Industry Canada	ICES-003 Class B	IC Declaration of Conformity
	European Union	EU Directive 2004/108/EC (EMC)	EN 55022:2010 Class B	CE Declaration of Conformity
	Korea	KCC	KN22:2009 Class B, KN24:2009	KCC Certificate
	Taiwan	BSMI	CNS 13438 (2006) Class B	BSMI Declaration of Conformity
	Australia	ACMA	AS/NZS CISPR22:2006, Class B	C-Tick Declaration of Conformity
RoHS	European Union	EU Directive 2011/65/EU (RoHS)	EU Directive 2011/65/EU (RoHS)	CE Declaration of Conformity

### 3.0 MECHANICAL SPECIFICATIONS

#### 3.1 9.5 mm Thickness


**NOTE: Optimus.2 Eco 2.5" SAS Drive Dimensions (in mm)<sup>8</sup>**

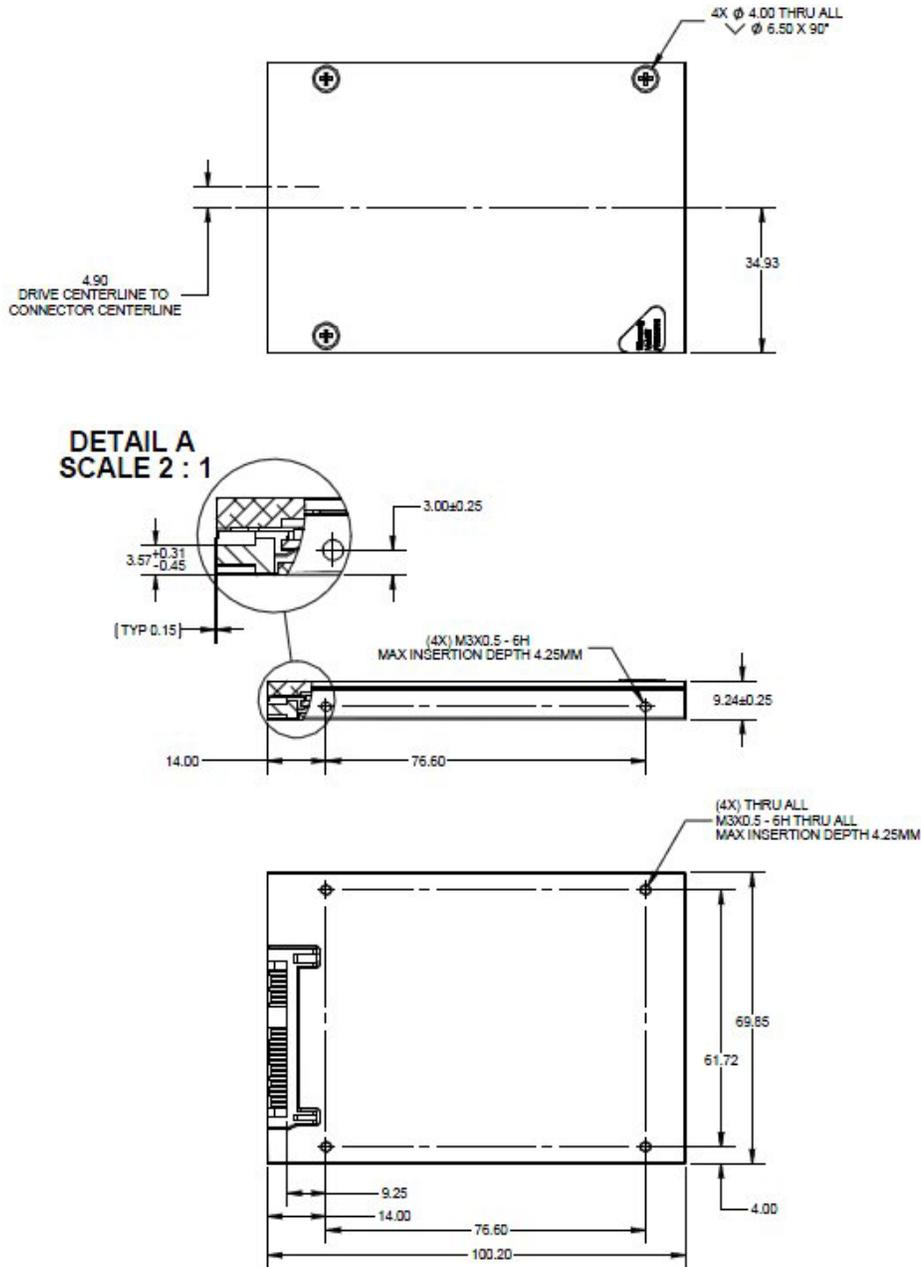

<b>NOTE:</b>	The warranty is voided if the label is removed.
--------------	---

### 3.2 15 mm Thickness

Figure 3: Optimus.2 Eco 2.5" SAS Drive Dimensions (in mm)

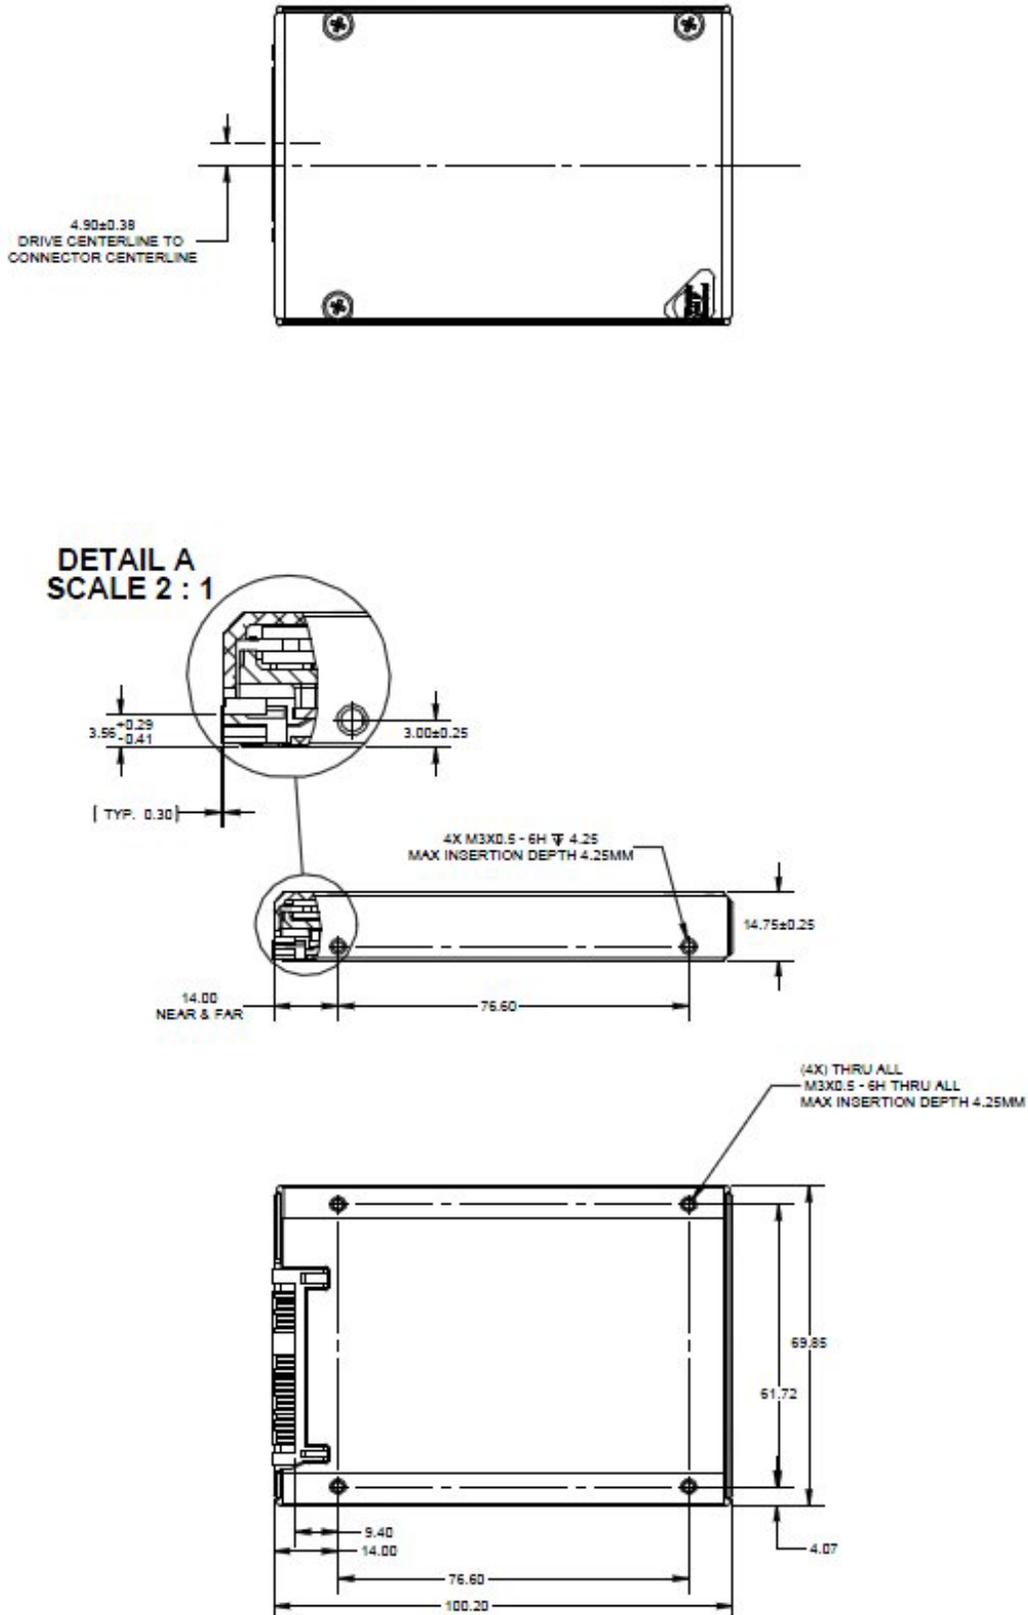

## 4.0 ELECTRICAL SPECIFICATION

### 4.1 Electrical Interface

The Optimus.2 Eco 2.5" SAS drive is compliant with the SAS-2, 6.0 Gbits/sec standard.

#### 4.1.1 Optimus.2 Eco Interface Connector

The SAS connector on the Optimus.2 Eco 2.5" SAS drives include two signal bays: a primary signal segment (S1 to S7), and a secondary signal segment (S8 to S14). The power bay is a standard 15-pin SAS power connector. The SAS connector can support both cabled and backplane plug-in connections.

Figure 4: SAS interface connector for the Optimus.2 Eco



#### 4.1.2 Signal Pinout Descriptions

Table 9: Signal Pinout Descriptions

Pin	Backplane	SAS Drive Plug
S1	GND	GND
S2	Transmit primary differential signal out +	Receive primary differential pair signal in +
S3	Transmit primary differential signal out -	Receive primary differential pair signal in -
S4	GND	GND
S5	Receive primary differential pair signal in -	Transmit primary differential pair signal out -
S6	Receive primary differential pair signal in +	Transmit primary differential pair signal out +
S7	GND	GND
S8	GND	GND
S9	Transmit secondary differential signal out +	Receive secondary differential signal in +
S10	Transmit secondary differential signal out -	Receive secondary differential signal in -
S11	GND	GND
S12	Receive secondary differential signal in -	Transmit secondary differential signal out -
S13	Receive secondary differential signal in +	Transmit secondary differential signal out +
S14	GND	GND

### 4.1.3 Power Pinout Descriptions

**Table 10: Power Pinout Descriptions**

Pin	Signal Name	In/Out	Signal Description
P1	V3.3	N/A	3.3 V power (not used)
P2	V3.3	N/A	3.3 V power (not used)
P3	V3.3	N/A	3.3 V power (not used)
P4	GND	In	1 <sup>st</sup> mate
P5	GND	In	2 <sup>nd</sup> mate
P6	GND	In	2 <sup>nd</sup> mate
P7	V5	In	5 V power, pre-charged, 2 <sup>nd</sup> mate
P8	V5	In	5 V power
P9	V5	In	5 V power
P10	GND	In	2 <sup>nd</sup> mate
P11	Reserved	In/Out	Ready and fault indicator
P12	GND	In	1 <sup>st</sup> mate
P13	V12	N/A	12 V power
P14	V12	N/A	12 V power
P15	V12	N/A	12 V power

### 4.1.4 Dual-Port

As shown in page 16, the Optimus.2 Eco 2.5" SAS SSDs support dual ports. Although each of these has individual SAS addresses, they may be connected to the same or different SCSI domains. In addition, each port is independently clocked with support for 6 Gbits/sec link rates.

## 4.2 Remote LED

In compliance with the SAS specification, pin P11 on the 15-pin power connector supports a remote LED. Because the signal is not suitable for directly driving an LED, a circuit external to the device must first buffer the signal. When connected, the remote LED indicates both ready and fault conditions. See the following table for the blink rates associated with the remote LED when activity is detected.

**Table 11: Activity LED Blink Rates**

Command	Blink Rate
Read/Write Operations	Proportional to the I/O rate
Format	Blink 2 times per second
Send Diagnostics Foreground Self-Test	Blink 2 times per second
Send Diagnostics Background Self-Test	Blink 2 times per second

## 4.3 Thermal Sensor

The Optimus.2 Eco 2.5" SAS SSDs has a thermal sensor on the printed circuit board. The drive stores the highest and lowest temperature readings in the drive logs. The temperature represents the temperature of the printed circuit board, not the drive case. See page 25 for more information about reading log pages.

## 4.4 Absolute Maximum Ratings

The listed values apply to all Optimus.2 Eco drives.

**Table 12: Voltage and Storage Temperature**

Symbol	Parameter	Ratings (Max)	Unit
$V_{IN}$	5.0 +10%, $\pm$ 5%	5.5	V
	12.0 $\pm$ 5%	12.6	
$I_{ACTIVE}$	Active Current (5 V) <sup>8</sup>	1.20	V
	Active Current (12 V) <sup>8</sup>	0.50	
$T_{STG}$	Storage Temperature	-40 to +85	°C

## 4.5 Recommended Operating Conditions

The listed values apply to all Optimus.2 Eco drives.

**Table 13: Recommended Operating Conditions**

Symbol	Parameter	Ratings	Unit
$V_{IN}$	5 V Supply Voltage	5.0 +10%, -5%	V
	12 V Supply Voltage	12.0 $\pm$ 5%	
$T_A$	Operating Temperature (Internal) <sup>9</sup>	0 to +70	°C

## 4.6 DC Characteristics

**Table 14: DC Characteristics<sup>10</sup>**

Symbol	Parameter	Average	Peak	Unit	Condition
$I_{READ}$	Current During Read	0.46	0.72	A	$V_{IN} = 5\text{ V}$
		0.19	0.30	A	$V_{IN} = 12\text{ V}$
$I_{WRITE}$	Current During Write	0.62	1.20	A	$V_{IN} = 5\text{ V}$
		0.26	0.50	A	$V_{IN} = 12\text{ V}$
$I_{IDLE}$	Idle Current	0.34	0.37	A	$V_{IN} = 5\text{ V}$
		0.14	0.15	A	$V_{IN} = 12\text{ V}$

8. These values represent the maximum current that could be drawn on either power rail, independent of the other. In operation, maximum 5 V current draw does not occur synchronously with maximum 12 V current draw. These values should not be summed to estimate a maximum drive power consumption; this value must be determined by direct measurement only.

9. As measured by the thermal sensor.

10. Current values presented for 12 V and 5 V are independent measurements and cannot be combined to compute overall drive power consumption. Peak draw is transient, typically lasting < 100 usec.

## 5.0 SCSI SENSE CODE KEY

The SanDisk Optimus SAS drives use sense data to indicate the type of error that occurred if the drive fails to execute a command. If the drive returns a CHECK CONDITION, issue the Request Sense command to view the sense data. The drive will respond with bytes of information containing the sense key, additional sense key code (ASC), and additional sense code qualifier (ASCQ).

### 5.1 Sense Data

See the following table for a list of the supported sense data.

**Table 15: Sense Data**

Sense Key	ASC	ASCQ	FRU	Condition Description
NO SENSE (00h)				
00	00	00	00	GOOD response
00	00	EB	00	RETRANSMIT response
00	00	EE	00	RETRANSMIT GOOD response
RECOVERED ERROR (01h)				
01	0B	00	00	Failure prediction warning
01	0B	01	BE	Failure prediction threshold exceeded drive temperature warning
01	0C	01	00	Write error recovered with auto reallocation
01	11	14	00	Marked recovered by application client
01	15	01	00	Mechanical positioning error recovered
01	17	00	00	Recovered data with no error correction applied
01	17	01	00	Recovered data with retries
01	1C	00	00	Recovered error defect list not found
01	5D	00	00	Failure prediction threshold exceeded
01	5D	00	01	Failure prediction threshold exceeded Raw Read Error Rate
01	5D	00	02	Failure prediction threshold exceeded Flash ROM Check
01	5D	00	05	Failure prediction threshold exceeded Reallocated Block Count
01	5D	00	09	Failure prediction threshold exceeded Power On Hours Count
01	5D	00	0C	Failure prediction threshold exceeded Power Cycle Count
01	5D	00	0D	Failure prediction threshold exceeded ECC Rate
01	5D	00	20	Failure prediction threshold exceeded Write Amplification
01	5D	00	AA	Failure prediction threshold exceeded Percent Unused Reserved Block
01	5D	00	B1	Failure prediction threshold exceeded Percent Drive Life Remaining
01	5D	00	B3	Failure prediction threshold exceeded Percent Used Reserve Block Count
01	5D	00	B4	Failure prediction threshold exceeded Percent Unused Reserve Block Count
01	5D	00	B5	Failure prediction threshold exceeded Program Fail Count
01	5D	00	B6	Failure prediction threshold exceeded Erase Fail Count
01	5D	00	C2	Failure prediction threshold exceeded Drive Temperature
01	5D	00	C3	Failure prediction threshold exceeded Uncorrectable Error Count
01	5D	00	C6	Failure prediction threshold exceeded Offline Scan Uncorrectable Sector Count
01	5D	00	C7	Failure prediction threshold exceeded CRC Error Count
01	5D	00	C9	Failure prediction threshold exceeded Volatile Memory Backup Source Failure
01	5D	00	CA	Failure prediction threshold exceeded Exception Mode Status

Table 15: Sense Data(Continued)

Sense Key	ASC	ASCQ	FRU	Condition Description
01	5D	00	E9	Failure prediction threshold exceeded Number of Write Count
01	5D	00	F0	Failure prediction threshold exceeded Link Error Event
01	5D	00	F5	Failure prediction threshold exceeded Percent Drive Life Used
NOT READY (02h)				
02	04	00	00	LUN not ready; cause not reportable
02	04	01	00	LUN not ready; becoming ready
02	04	02	00	LUN not ready; initialization command required
02	04	04	00	LUN not ready; format in progress
02	04	09	00	LUN not ready; selftest in progress
02	04	11	00	LUN not ready; notify required
02	04	1B	00	LUN not ready; sanitize in progress
02	04	DB	00	LUN not ready; diagnostics running
MEDIUM ERROR (03h)				
03	0C	00	00	Write error
03	0C	14	00	Write error; RMW marked bad by application client
03	11	00	00	Unrecovered read error
03	11	14	00	Marked bad by application client
03	31	00	00	Format corrupt
03	32	00	00	No defect spare location available
03	32	01	00	Defect list update failure
HARDWARE ERROR (04h)				
04	3E	03	00	Logical unit failed selftest
04	3E	04	00	Logical unit unable to update selftest result log
04	42	00	00	Power on or selftest failure
04	44	00	00	Internal target failure
04	BA	DA	00	Degraded media state L2P table CZ1
ILLEGAL REQUEST (05h)				
05	0E	01	00	Information unit too short
05	0E	02	00	Information unit too long
05	1A	00	00	Parameter list length error
05	20	00	00	Invalid command operation code
05	21	00	00	LBA out of range
05	24	00	00	Invalid field in CDB
05	25	00	00	Logical unit not supported
05	26	00	00	Invalid field parameter length
05	26	01	00	Parameter not supported
05	26	02	00	Parameter value invalid
05	26	04	00	Invalid release of persistent reservation
05	26	80	00	Parameters full
05	2C	09	00	Previous reservation conflict status
05	49	00	00	Invalid message error

Table 15: Sense Data(Continued)

Sense Key	ASC	ASCQ	FRU	Condition Description
05	55	02	00	Insufficient reservation resources
05	55	04	00	Insufficient registration resources
05	74	00	00	Security error
05	74	01	00	Unable to decrypt data
05	74	02	00	Unencrypted data encountered while decrypting
05	74	03	00	Incorrect data encryption key
05	74	04	00	Cryptographic integrity validation failed
05	74	05	00	Error decrypting data
05	74	06	00	Unknown signature verification key
05	74	07	00	Encryption parameters not useable
05	74	08	00	Digital signature validation failure
05	74	09	00	Encryption mode mismatch on read
05	74	0A	00	Encrypted block not raw read enabled
05	74	0B	00	Incorrect encryption parameters
05	74	0C	00	Unable to decrypt parameter list
05	74	0D	00	Encryption algorithm disabled
05	74	10	00	SA creation parameter value invalid
05	74	11	00	SA creation parameter value rejected
05	74	12	00	Invalid SA usage
05	74	21	00	Data encryption configuration prevented
05	74	30	00	SA creation parameter not supported
05	74	40	00	Authentication failed
05	74	61	00	External data encryption key manager access error
05	74	62	00	External data encryption key manager error
05	74	63	00	External data encryption key not found
05	74	64	00	External data encryption request not authorized
05	74	6E	00	External data encryption control timeout
05	74	6F	00	External data encryption control error
05	74	71	00	Logical unit access not authorized
05	74	79	00	Security conflict in translated device
<b>UNIT ATTENTION (06h)</b>				
06	00	00	00	Unit attention pending
06	29	00	00	Power on reset or bus device reset occurred
06	29	01	00	Power on reset occurred
06	29	02	00	Hard reset occurred
06	29	03	00	LUN reset occurred
06	29	07	00	IT Nexus loss
06	2A	00	00	Parameters changed
06	2A	01	00	Mode parameters changed
06	2A	02	00	Log parameters changed
06	2A	03	00	Reservations pre-empted

**Table 15: Sense Data(Continued)**

Sense Key	ASC	ASCQ	FRU	Condition Description
06	2A	04	00	Reservations released
06	2A	05	00	Registrations pre-empted
06	2F	00	00	Commands cleared by another initiator
06	2F	01	00	Commands cleared by power loss notification
06	3F	00	00	Target operation conditions have changed
06	3F	01	00	Microcode has been changed
06	3F	03	00	Inquiry data has changed
06	4B	04	00	NAK received UA
<b>DATA PROTECT (07h)</b>				
07	27	00	00	Write protected
<b>ABORTED (0Bh)</b>				
0B	00	00	00	Aborted command
0B	10	01	00	Logical block guard check failed
0B	10	02	00	Logical block application tag check failed
0B	10	03	00	Logical block reference tag check failed
0B	3F	01	00	Aborted download in progress
0B	44	00	00	Command time limit exceeded
0B	45	00	00	Select/Reselect failure
0B	47	00	00	SCSI parity error
0B	47	01	00	Data phase CRC error detected
0B	47	80	00	Double guard page allocation detected
0B	47	81	00	Data MPECC error detected
0B	47	82	00	Data BCRC error detected
0B	47	83	00	Data HLBA error detected
0B	47	84	00	Unexpected internal check
0B	4B	02	00	Too much write data
0B	4B	04	00	NAK received
0B	4B	05	00	Data offset error
0B	4B	06	00	Initiator response timeout
0B	4B	07	00	Connection lost
0B	4E	00	00	Overlapped commands attempted
0B	55	03	00	Aborted insufficient resources
<b>MISCOMPARE (0Eh)</b>				
0E	1D	00	00	Miscompare during verify operation
0E	1D	01	00	Miscompare verify of unmapped LBA

## 5.2 SCSI Commands

### 5.2.1 Supported SCSI Commands

The Optimus.2 Eco 2.5" SAS SSDs support the standard commands listed in the following table. For more detailed descriptions of the commands, please refer to the specification defined for the command.

**Table 16: Supported SCSI Commands**

Command Name	Op Code/Service Action (Hex)	Standard
Format Unit	04	SCSI Block Commands-3
Inquiry	12	SCSI Primary Commands-4
Log Select (10 Bytes)	4C	SCSI Primary Commands-4
Log Sense (10 Bytes)	4D	SCSI Primary Commands-4
Mode Select (6 Bytes)	15	SCSI Primary Commands-4
Mode Select (10 Bytes)	55	SCSI Primary Commands-4
Mode Sense (6 Bytes)	1A	SCSI Primary Commands-4
Mode Sense (10 Bytes)	5A	SCSI Primary Commands-4
Persistent Reserve In	5E	SCSI Block Commands-3
Persistent Reserve Out	5F	SCSI Block Commands-3
Read (6 Bytes)	08	SCSI Block Commands-3
Read (10 Bytes)	28	SCSI Block Commands-3
Read (12 Bytes)	A8	SCSI Block Commands-3
Read (16 Bytes)	88	SCSI Block Commands-3
Read (32 Bytes)	7F/0009	SCSI Block Commands-3
Read Buffer	3C	SCSI Block Commands-3
Read Capacity (10 Bytes)	25	SCSI Block Commands-3
Read Capacity (16 Bytes)	9E /10	SCSI Block Commands-3
Read Defect Data (10 Bytes)	37	SCSI Block Commands-3
Read Defect Data (12 Bytes)	3E	SCSI Block Commands-3
Read Long (10 Bytes)	1B	SCSI Primary Commands-4
Reassign Blocks	07	SCSI Block Commands-3
Receive Diagnostics Results	1C	SCSI Block Commands-3
Report LUNS	A0	SCSI Primary Commands-4
Report Supported Opcodes	A3	SCSI Primary Commands-4
Request Sense	03	SCSI Primary Commands-4
Send Diagnostic	1D	SCSI Primary Commands-4
Start/Stop Unit	1B	SCSI Primary Commands-4
Synchronize Cache (10 Bytes)	35	SCSI Primary Commands-4
Test Unit Ready	00	SCSI Primary Commands-4
Unmap	42	SCSI Primary Commands-4
Verify (10 Bytes)	2F	SCSI Block Commands-3
Verify (12 Bytes)	AF	SCSI Block Commands-3
Verify (16 Bytes)	8F	SCSI Block Commands-3
Verify (32 Bytes)	7F/000A	SCSI Block Commands-3
Write (6 Bytes)	0A	SCSI Block Commands-3

**Table 16: Supported SCSI Commands (Continued)**

Command Name	Op Code/Service Action (Hex)	Standard
Write (10 Bytes)	2A	SCSI Block Commands-3
Write (12 Bytes)	AA	SCSI Block Commands-3
Write (16 Bytes)	8A	SCSI Block Commands-3
Write (32 Bytes)	7F/000B	SCSI Block Commands-3
Write Buffer	3B	SCSI Primary Commands-4
Write Long (10 Bytes)	3F	SCSI Primary Commands-4
Write Long (16 Bytes)	9F	SCSI Primary Commands-4
Write Same (10 Bytes)	41	SCSI Block Commands-3
Write Same (16 Bytes)	93	SCSI Block Commands-3
Write Same (32 Bytes)	7F/000D	SCSI Block Commands-3
Write and Verify (10 Bytes)	2E	SCSI Block Commands-3
Write and Verify (12 Bytes)	AE	SCSI Block Commands-3
Write and Verify (16 Bytes)	8E	SCSI Block Commands-3
Write and Verify (32 Bytes)	7F/000C	SCSI Block Commands-3

### 5.3 Security Erase Support

The Optimus.2 Eco 2.5" SAS drives support a normal secure erase function through the Format Unit command. To erase the drive, set the INITIALIZATION PATTERN TYPE field in the Initialization Pattern Description to 81h, and set the SECURITY INITIALIZE bit to 1. For more information about the Format Unit command, see the SCSI Block Commands-3 specification.

### 5.4 Supported SMART Operations

Self-Monitoring Analysis and Reporting Technology (SMART) attributes provide diagnostic information regarding drive operation. SMART alerts the host to potential drive problems, allowing system operators to assess the situation and backup data prior to an operational failure.

With SMART the Optimus.2 Eco SAS SSDs continually monitor a number of key internal operating parameters to identify performance changes which could be a sign of impending drive failure. When the drive detects such a condition, the drive alerts the host system to a reduction in drive performance or reliability. The drive supports information exception reporting functionality as defined in the SCSI standard Informational Exceptions log page (2Fh). The DEXCPT bit is used to enable/disable SMART operations, and the PERF bit is used to defer SMART Operations. Both of these bits are also found in the standard Informational Exceptions log page.

The Optimus.2 Eco SAS SMART subsystem also supports a thermal monitoring and warning feature. This system generates an 01/0B sense code when the drive exceeds the factory-configured temperature of 65 °C. To determine the drive temperature, use the SSD Event log page (3Ch). See the table in the following section for more information about supported log pages.

## 5.5 Log Pages

The Optimus.2 Eco 2.5" SAS SSDs support the log pages listed in the following table. To retrieve these log pages, use the Log Sense SCSI command with the appropriate page code.

**Table 17: Supported Log Pages**

Log Page	Page Code (Hex)	Description
Supported Pages	00	Lists the supported log pages.
Write Error Counter	02	Returns the total number of uncorrectable write errors.
Read Error Counter	03	Returns the total number of uncorrectable read errors.
Verify Error Counter	05	Returns the total number of uncorrectable verify errors.
Non-Medium Error Counter	06	Indicates the number of non-medium errors that occurred.
Time	07	Provides the lifetime power in hours/seconds and the number of power cycles.
Temperature	0D	Specifies the highest temperature logged from the on-board sensor.
Start/Stop Cycle Counter	0E	Indicates the number of start/stop cycles that occurred.
Application Client	0F	Provides a location for application clients to store information.
Self-Test Results	10	Returns the results of the drive self-tests.
Solid State Media	11	Indicates parameters that are specific to SCSI target devices that contain solid state media.
Background Scan Results	15	Returns the results of a background scan, which includes power-on minutes, number of scans performed, etc.
Non-Volatile Cache	17	Reports that non-volatile cache is present and for how long the data remains non-volatile.
Protocol-Specific Port	18	Returns PHY-specific data for each of the two SAS ports.
General Statistics and Performance	19	Provides performance and general statistical data, such as the number of read commands received, number of blocks transmitted, etc.
Critical Failure	28	Returns a log of critical events, including the time the event occurred and the type of event.
Informational Exceptions	2F	Returns information on specific exceptions related to predictive failure conditions (SMART).
Erase Counts	31	Returns the highest number of erase cycles on a single flash channel.
Erase Errors	33	Returns the total number of uncorrectable errors and defects (both manufacturer-detected and grown).
SMART Data	34	Returns the supported attributes and their respective minimum, maximum, current, and threshold values.
SAS Error Statistics	36	Returns the total number of low-level SAS port errors.
SSD Event	3C	Provides a log of critical and informational events to identify and diagnose problems encountered by the drive.

## 5.6 SMART Attributes

The following table describes the supported SMART attributes returned in log page 34h. All attributes have a normalized value range of 0 to 255 percent to failure. If a value is 100 or more, a SMART trip is reported. It is important to note that most SMART attributes values are maintained across power cycles (that is, they are non-volatile).

**Table 18: Supported SMART Attributes**

Attribute ID (Dec)	Name	Indicates
1	Raw Read Error Rate	The raw error related to ECC errors. Correctable and uncorrectable data fail correction errors are included in the error event count.
2	Flash ROM Check	Indicates that the firmware image in flash may have a checksum error. 0 = no errors 1 = at least one image failed the checksum test
5	Retired Block Count	The total number of retired blocks. This attribute is non-volatile.
9	Power-On-Hours (POH)	The total number of hours the drive has been powered on. This attribute is non-volatile.
12	Device Power Cycle Count	The number of full power cycles. This attribute is non-volatile.
13	Soft Read Error Rate	The number of corrected read errors reported. This attribute is non-volatile.
177	Percent of Drive Life Remaining	The percentage of drive life remaining. This attribute is non-volatile.
180	Percent of Unused Spare Blocks Remaining	The number of available spare blocks.
181	Program Fail Count	The number of flash program failures that occurred since the drive was first initialized. This attribute is non-volatile.
182	Erase Fail Count	The number of flash erase failures that occurred since the drive was first initialized. This attribute is non-volatile.
190	Critical Temperature	Internal SSD temperature. If the current temperature exceeds the threshold value, the drive throttles the performance.
194	Temperature	Internal SSD temperature.
195	ECC On-the-Fly Count	The total number of uncorrectable errors. This attribute is non-volatile.
198	Uncorrectable Sector Count	The total number of errors the data fail correction algorithm could not correct when reading/writing a sector. A rise in this value indicates defects in the flash memory. This attribute is non-volatile.
233	Number of Write Counts	The total number of writes performed. This attribute is non-volatile.
245	Percentage of Drive Life Used	The total estimated drive life used as a percentage. This attribute is non-volatile.

## 5.7 Warranty

The Optimus.2 Eco SSD is designed for high performance computing environments and does not implement features to limit the performance. The Optimus.2 Eco SSD is warranted for 5 years for defects in material and workmanship and for its rated endurance specified in DWPD. The drive will make no attempt to limit application performance to meet the DWPD constraint. Configurable SMART warnings are provided to help the application designer manage drive wear-out, including the Percentage of Drive Life Used, Lifetime Remaining, and Write Amplification SMART attributes.

## 6.0 PART NUMBER

### 6.1 Part Numbering Information

Table 19: Part Numbering Information

Optimus.2 Eco			
SanDisk Part Number	Drive Capacity	Form Factor	LBA Count
SDLKOD6R-400G-5CA1	400 GBytes	9.5 mm	781,422,768
SDLKOC6R-800G-5CA1	800 GBytes	9.5 mm	1,562,824,368
SDLLOC6R-016T-5CA1	1600 GBytes	15 mm	3,125,627,568
SDLLOC6R-020T-5CA1	2000 GBytes	15 mm	3,750,748,848