

## Description

# Magnecraft™ General Purpose Relays

## 784 Series

### 4PDT 15 A



UL listed when used with proper Magnecraft™ sockets



784 Clear Cover



784 Full-Feature Cover


## Description

The 784 Series plug-in relays offer clear or full-feature covers with multiple mounting options and accessories.

Feature	Benefit
15 A max. switching current	Ideal for automation panels & controls
Clear or full-feature cover options	Full-feature covers include LED indicator & locking test button
4PDT contact configuration	Simultaneously control up to 4 separate circuits
Socket mount option	Simplifies installation & maintenance while also allowing the use of protection modules, hold-down clips & other accessories
Gold-flashed contacts	Reduces contact oxidation & increases shelf life
Mechanical flag indicator	Standard feature displays relay status during testing or operation

Contact Rating	Contact Configuration	Nominal Voltage	Coil Resistance (Ω)	Standard Part Number: Clear Cover	Standard Part Number: Full-Feature
15 A	4PDT	24 Vac 50/60 Hz	84.5	784XDXC-24A	784XDXM4L-24A
		120 Vac 50/60 Hz	2220	784XDXC-120A	784XDXM4L-120A
		12 Vdc	96	–	784XDXM4L-12D
		24 Vdc	388	784XDXC-24D	784XDXM4L-24D

## Part Number Explanation

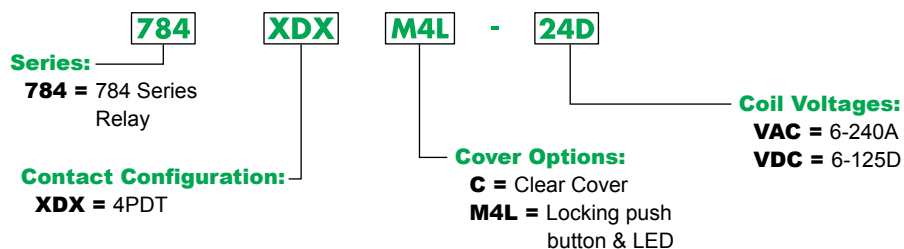

\*Please note that LED-only versions are also available.  
Please contact Customer Service for more information (847-441-2540).

# Magnecraft™ General Purpose Relays

## 784 Series

### 4PDT 15 A


### Specifications (UL 508)

Part Number	784XDX
<b>Contact Characteristics</b>	
Terminal Style	Blade
Contact Configuration	4PDT
Maximum Current	15 A
Contact Materials	Silver Alloy
Maximum Switching Voltage	300 V
Rated Switching Current at Voltage	<b>Resistive:</b> 12 A at 277 Vac 50/60 Hz; 15 A at 120 Vac 50/60 Hz; 12 A at 28 Vdc <b>Motor:</b> 1/2 hp at 120 Vac 50/60 Hz; 3/4 hp at 250 Vac 50/60 Hz <b>Pilot Duty:</b> B300
Minimum Switching Requirement	100 mA at 5 Vdc (0.5 W)
<b>Coil Characteristics</b>	
Maximum Operating Voltage	110% (AC / DC)
Maximum Pickup Voltage	85% (AC); 80% (DC)
Drop-out Voltage Threshold	15% (AC); 10% (DC)
Average Consumption	2.0 VA (AC); 1.5 W (DC)
<b>General Characteristics</b>	
Electrical Life at Rated Load	200,000 operations
Mechanical Life (Unpowered)	10,000,000 operations
Operating Time (Response Time)	20 ms
Dielectric Strength - Between Coil and Contact (AC)	2500 V(rms)
Dielectric Strength - Between Poles (AC)	2500 V(rms)
Ambient Air Temperature around the Device - Storage	-40 – +85 °C (-40 – +185 °F)
Ambient Air Temperature around the Device - Operation	-40 – +55 °C (-40 – +131 °F)
Vibration Resistance - Operational	3 g-n at 10-55 Hz
Shock Resistance	10 g-n
Degree of Protection	IP 40
Weight	80 g (2.82 oz)
Agency Approvals	UL with socket, UR (E43641), CE, CSA (LR40787), RoHS



Note: Actual product performance may vary depending on application and environmental conditions.

### Dimensions — inches (millimeters)

### Clear Cover Dimensions

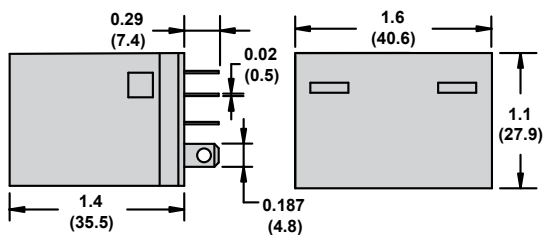



### Full-Feature Cover Dimensions

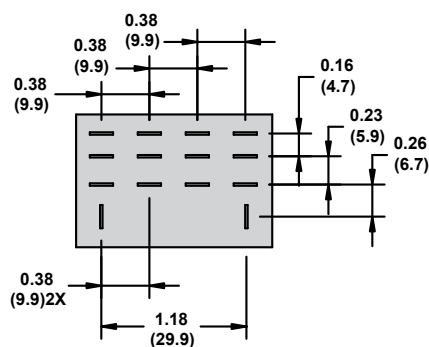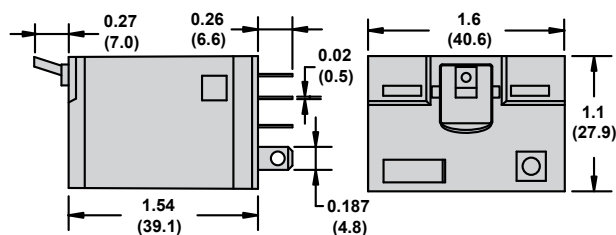

## Wiring Diagram

**4PDT**






Description


Optional sockets offer customizable, finger-safe™ solutions including protection modules, hold-down clips, and ID tags. Sockets are DIN rail and panel mount compatible.

Relay Accessories



Description	Function	For Use With Relays	Pkg. Min.	Standard Part Number
Socket 1	Finger-safe, DIN/Panel mount with screw terminals & clamping plates	784	10	70-784D14-1
Adapter 2	DIN rail adapter	784	10	16-784C
Adapter 3	Flange mount adapter	784	10	16-784C1

Socket Accessories

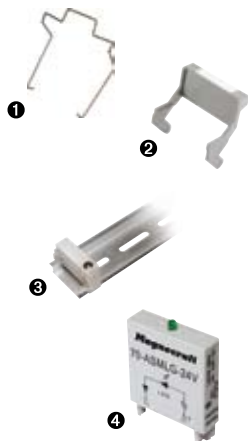

Description	Function	For Use With Socket	Coil Voltage	Pkg. Min.	Standard Part Number
Metal Spring Clip 1	Secures relay in socket	70-784D14-1	—	10	16-784SC
Plastic ID Hold-Down Clip 2	Secures relay in socket and provides labeling		—	10	16-784IDC
Extruded Aluminum DIN Rail, 39.37" (1000 mm) 3	Quick installation and removal of sockets		—	10	16-700DIN
DIN Rail End Clip 3	Holds sockets firmly in place on DIN rail	—	—	10	16-DCLIP-1
Large Socket Module	MOV Suppressor ( <i>Protects from damaging electrical spikes</i> )	70-784D14-1	24 Vac/Vdc	10	70-ASMM-24
Large Socket Module	Protection Diode ( <i>Protects external drive circuitry from inductive voltages</i> )		120 Vac/Vdc	10	70-ASMD-250
Large Socket Module 4	LED Indicator ( <i>Provides coil status at a glance</i> )		110/240 Vac/Vdc	10	70-ASMLG-110/240
Large Socket Module	RC Suppressor ( <i>Snubs back EMF of relay coil</i> )		110/240 Vac/Vdc	10	70-ASMR-110/240

Note: Use of LED or RC socket module may increase coil power draw by up to 10%.